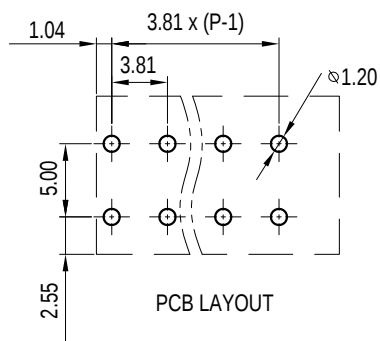
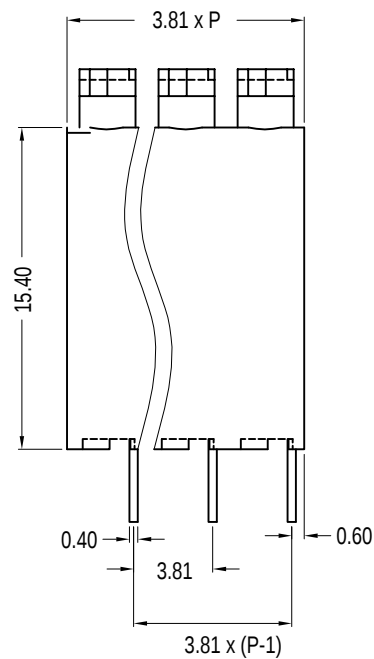
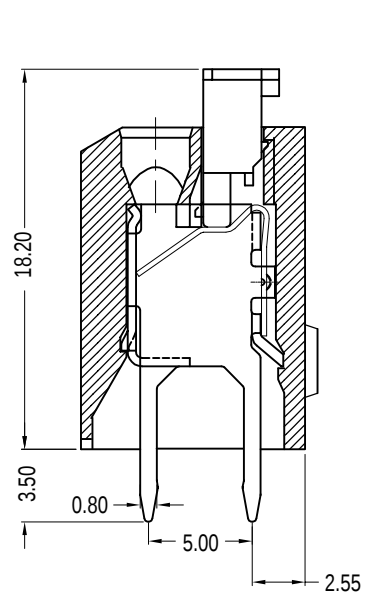


Notes:

1. Electrical Characteristics:

1. 1 Contact Resistance: 20mΩ Max
1. 2 Dielectric Withstanding Voltage: 2000V AC(rms) for 1 Minute
1. 3 Insulation Resistance: 1000mΩ Min
1. 4 Current Rating: 10A
1. 5 Voltage Rating: 300V AC rms

2. Environment Characteristics:

2. 1 Temperature: -40°C ~ +105°C

3. Materials:

3. 1 Contact Materials: Phosphor Bronze
3. 2 Contact Plating: Tin Plated
3. 3 Insulator Materials: PA66 + 5%GF , UL94V-0

4. Machaniical Properties:

4. 1 Wire range: 20--16AWG / 0.20~1.5mm
4. 2 Strip Length: 8 ~ 9 mm

GOSUN Terminals & Connectors

GENERAL TOLERANCE

X.* ± 5.0°	X. ± 0.30
.X* ± 3.0°	.X ± 0.25
.XX* ± 2.0°	.XX ± 0.15
.XXX* ± 1.0°	.XXX ± 0.10

DESIGN: 黄 语 惠

CHECK: 忠 诚

AUDIT: 忠 诚

APPROVE: 忠 诚

DATE: 2018.05.02

DATE: 2018.05.08

DATE: 2018.05.08

DATE: 2018.05.08

DWG. NO.:

YH-GSL010-001A-002

PART NO.:

GSL010-3.81

TITLE:

3.81mm Spring Terminal Block, Straight

REV.: 01	UNIT.: mm	SCALE.: 1:1	PAGE.: 1/1	
----------	-----------	-------------	------------	--