


TP511X




OUTLINE DIMENSIONS

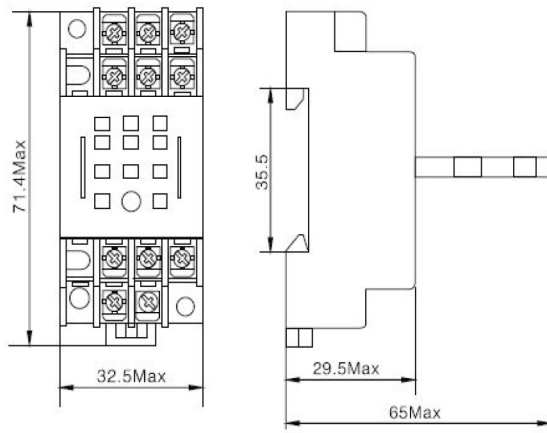

SPECIFICATION

Rated Load	Current	7A
	Voltage	300V
Dielectric Strength	2500V	
Ambient Temperature	-40~+75°C	
Socket Material	Flame retardance PA66+GF(V1/V0)	
Contacts Spring Material	QSn6.5-0.1	
Clamp Spring Material	Plastic	
Module	No	

MOUNTING DIMENSIONS

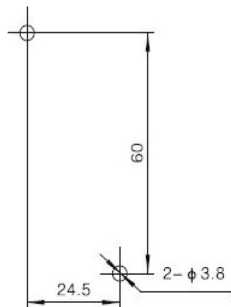

DIAGRAM

