


## 120-1010 Locking Cable Ties

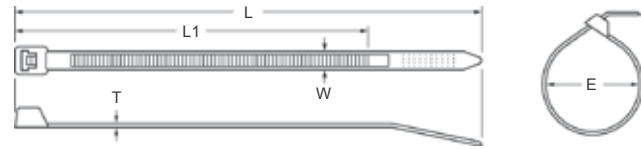

- Material : Nylon ( PA 66 ), Flammability UL 94V-2.
- Temperature : - 40 °C to 85 °C ( - 40 °F to 185 °F ). Short term to 130 °C ( 266 °F ).
- Excellent construction for consistent performance and reliability & easy threading.
- Colors : Nature or Black. ( Natural For indoor use ; Black for greater resistance to ultraviolet light in outdoor applications. ) \* Other colors are available upon request.
- **Application** : These versatile cable ties can be used in countless applications wherever you need to bundle wires, cables or conduits. The tie bundle diameters up to 235 mm ( can be joined together with 2, 3 or even more ties for larger diameters ) and have minimum loop tensile strengths from 18 Lbs. to 250 Lbs.

Style	Cat. No.		Length			Width W mm	Thickness T mm	Bundle Diameter E mm	Tensile Strength LBS.	Std. Pkg. pcs
			L		L1					
(Width)	Natural	Black	mm	Inch	mm					
S	ALT - 085S	ALT - 085S - B	87	3 1/2 "	64	2.5	1.1	2 ~ 18	18	1000
	ALT - 102S	ALT - 102S - B	104	4 "	79	2.5	1.1	2 ~ 23	18	1000
	ALT - 120S	ALT - 120S - B	122	5 "	97	2.5	1.1	2 ~ 30	18	1000
	ALT - 165S	ALT - 165S - B	167	6 1/2 "	143	2.5	1.1	2 ~ 40	18	1000
	ALT - 200S	ALT - 200S - B	206	8 "	182	2.5	1.3	2 ~ 50	18	1000
M	ALT - 150M	ALT - 150M - B	150	6 "	123	3.5	1.3	3 ~ 33	30	1000
	ALT - 200M	ALT - 200M - B	203	8 "	175	3.6	1.3	3 ~ 50	30	1000
	ALT - 250M	ALT - 250M - B	253	10 "	223	3.6	1.4	3 ~ 65	40	1000
	ALT - 300M	ALT - 300M - B	303	12 "	275	3.6	1.5	3 ~ 82	40	1000
L	ALT - 130L	ALT - 130L - B	132	5 "	104	4.8	1.3	4 ~ 32	50	1000
	ALT - 180L	ALT - 180L - B	182	7 "	153	4.8	1.4	4 ~ 42	50	1000
	ALT - 200L	ALT - 200L - B	205	8 "	172	4.8	1.4	4 ~ 48	50	1000
	ALT - 250L	ALT - 250L - B	255	10 "	223	5	1.5	4 ~ 65	50	1000
	ALT - 300L	ALT - 300L - B	302	12 "	273	5	1.6	4 ~ 82	50	1000
	ALT - 370L	ALT - 370L - B	373	14 1/2 "	345	5	1.5	4 ~ 102	50	100
	ALT - 390L	ALT - 390L - B	396	15 1/2 "	364	5	1.6	4 ~ 105	50	100
H	ALT - 430L	ALT - 430L - B	435	17 "	405	5	1.7	4 ~ 120	50	100
	ALT - 150H	ALT - 150H - B	150	6 "	124	7.6	1.6	8 ~ 33	120	100
	ALT - 200H	ALT - 200H - B	200	8 "	173	7.6	1.6	8 ~ 50	120	100
	ALT - 280H	ALT - 280H - B	283	11 "	257	7.9	1.6	8 ~ 76	120	100
	ALT - 340H	ALT - 340H - B	343	13 1/2 "	318	7.9	1.8	8 ~ 90	120	100
	ALT - 380H	ALT - 380H - B	389	15 "	360	8	2	8 ~ 100	120	100
	ALT - 530H	ALT - 530H - B	538	21 "	504	8	1.7	20 ~ 155	120	100
	ALT - 550H	ALT - 550H - B	556	22 "	522	12.7	2	20 ~ 160	250	100
	ALT - 685H	ALT - 685H - B	691	27 "	642	8	2	8 ~ 195	120	100
ALT - 812H	ALT - 812H - B	820	32 "	783	9	2	12 ~ 235	175	100	