




M1 Series



Two in One W/ Circuit Breaker

PANEL THICKNESS	DIM. X	DIM. Y
0.75 ~ 1.25	28.5 ~ 28.6	13.5 ~ 13.6
1.25 ~ 2.00	28.6 ~ 28.7	13.5 ~ 13.6
2.00 ~ 3.00	28.8 ~ 28.9	13.5 ~ 13.6

MOUNTING HOLE

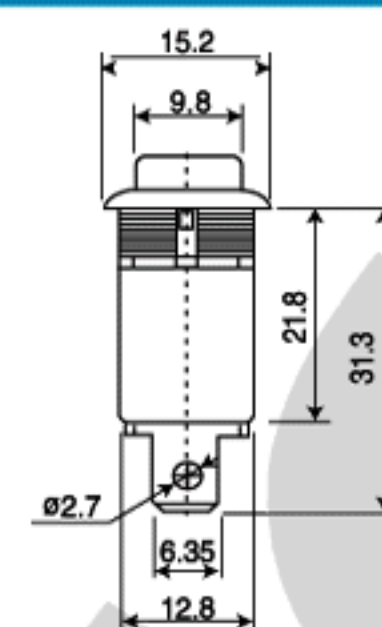
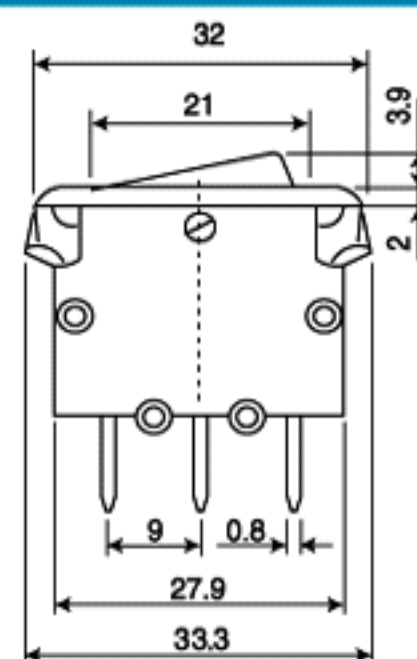
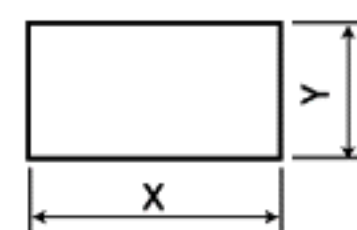


RL1-5 Series



15A 125V AC
10A 250V AC

MODEL NO.	TYPE
RL1-5A	SPST ON OFF
RL1-5B	SPDT ON ON
RL1-5C	SPDT ON OFF ON
RL1-5D	SPST (ON) OFF
RL1-5E	SPST ON (OFF)
RL1-5F	SPST (ON) ON
RL1-5H	SPDT (ON) OFF ON
RL1-5L	SPST Illuminated

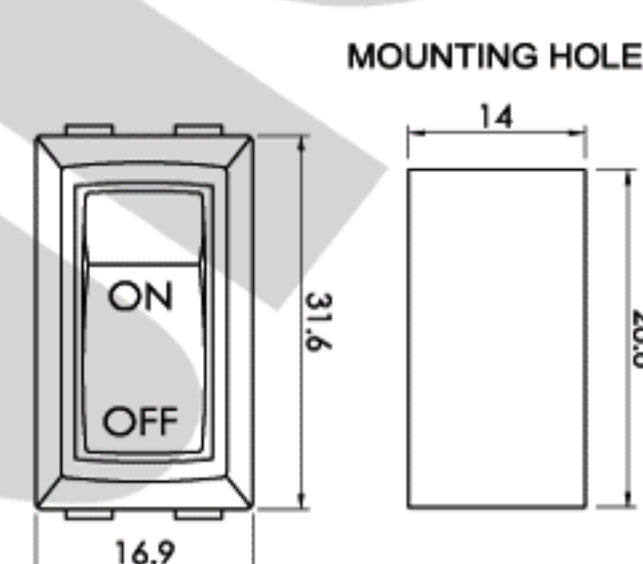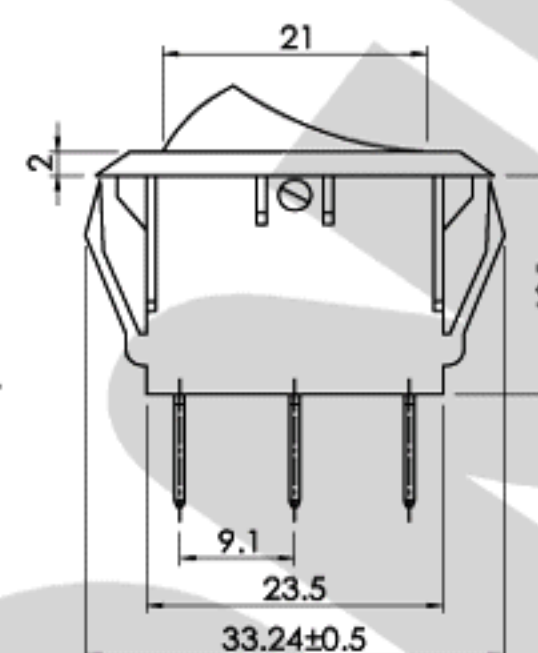
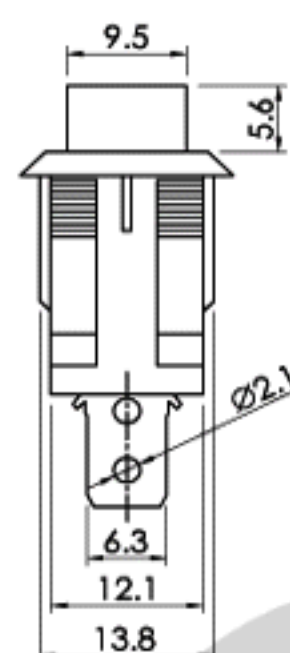


606P Series



RS-606P: 6A 250V AC
※ SS24: 16A 250V AC

MODEL NO.	TYPE
RS-606PA	DPST ON OFF
RS-606PB	DPDT ON ON
RS-606PC	DPDT ON OFF ON
RS-606PD	DPST (ON) OFF
RS-606PE	DPST ON (OFF)
RS-606PF	DPDT (ON) ON
RS-606PAL	DPST Illuminated
R13-33H	DPDT ON OFF (ON)
R13-33I	DPDT (ON) OFF (ON)

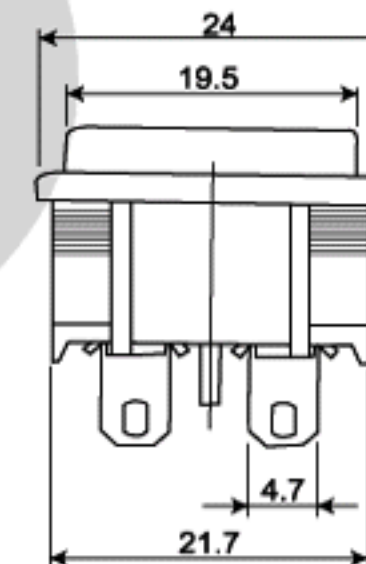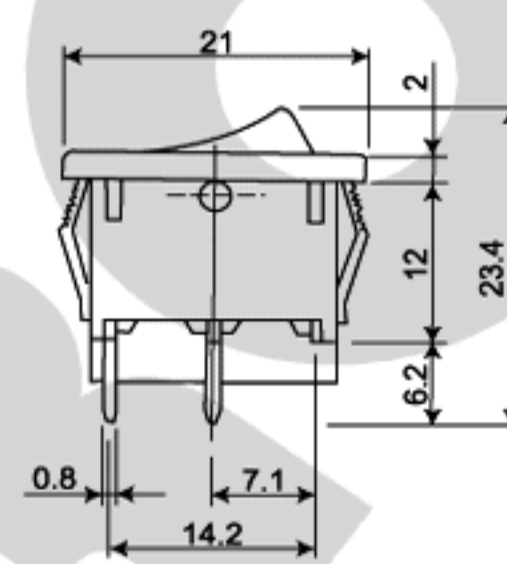

MOUNTING HOLE : 22 x 19.4mm

606P SEAL CAP




R5 series





Standard:
16A 250V AC
20A 125V AC

※ High Rating:
R519, R599
25A 250V AC

MODEL NO.	TYPE
R515	DPST ON OFF
※ R519	DPST ON OFF (25A 250V AC)
R525	DPDT ON ON
R535	DPDT ON OFF ON
R545	DPDT ON (ON)
R555	DPST OFF (ON)
R565	DPDT (ON) OFF (ON)
R575	DPDT ON (OFF)
R585	DPDT ON OFF (ON)
R595	DPST Illuminated
※ R599	DPST Illuminated (25A 250V AC)

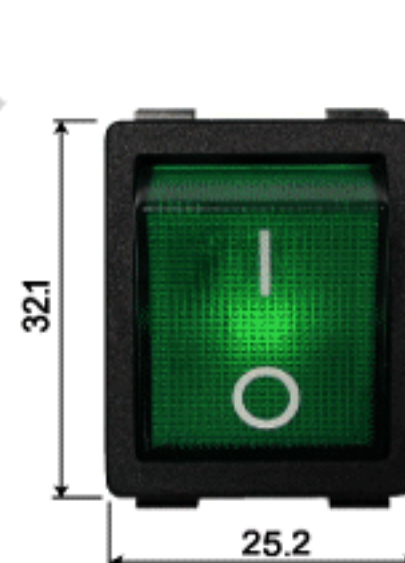

MOUNTING HOLE : 22 x 30mm

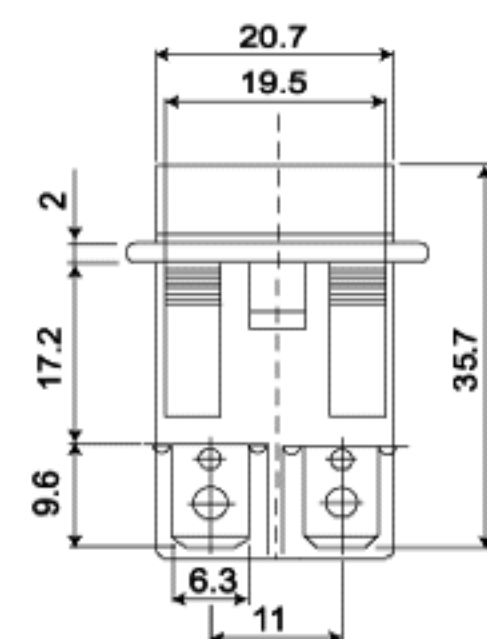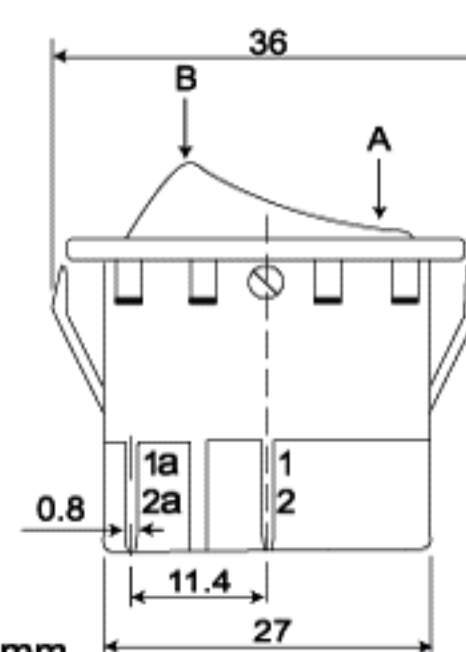

HOW TO ORDER

MODEL NO.	+	HOUSING COLOR	+	ROCKER COLOR	or	LAMP COLOR	+	MARKING	+	TERMINAL TYPE	+	LAMP VOLTAGE	+	LAMP COLOR
		B : BLACK W : WHITE G : GRAY		B : BLACK W : WHITE G : GRAY R : RED Y : YELLOW GN : GREEN		R : RED Y : YELLOW GN : GREEN				T S		□ : NO LAMP 1 : 125V AC 2 : 250V AC 3 : 12V DC 4 : 24V DC		※ For R495□□□□□□□□ Dot Illuminated only { R : RED Y : YELLOW GN : GREEN