

**DESCRIPTION**

- \* Wider light distribution enables this device to be seen within wider range.
- \* Available Size: Rectangular 18x24mm  
Square 18 x 18mm  
Round  $\varnothing$  18mm
- \* Color lens available : Red, Yellow, Green; engraving on lens or marking available on request
- \* Illuminated by LED lamp.  
IP40 protection degree.
- \* Applied UL94 V0 high grade fire prevention plastic material.
- \* Approvals: UL/CUL/VDE/CE pending

**SPECIFICATIONS**

<b>Rated Voltage</b>	AC110V / 220V	<b>Cable Range</b>	2x0.75mm <sup>2</sup> /1x1.0mm <sup>2</sup> Max
<b>Rated Current</b>	min100mA~max3A	<b>Storage Temperature</b>	-40°C~+85°C
<b>Electrical Life</b>	3000hr(continuous tone)	<b>Operating Temperature</b>	-25°C~+55°C
<b>Terminal</b>	Soldering type	<b>Degree of Protection</b>	IP40
<b>Wire Range</b>	1x1.5mm <sup>2</sup> max		

**ORDER INFORMATION**

MODEL FORMAT ADP16F **1**-0**2**0-E1T **3**




**1** DEGREE OF PROTECTION  
4 : IP40

**2** HEAD SHAPE  
R : ROUND  
S : SQUARE  
T : RECTANGULAR

**3** LENS COLOR  
G : GREEN  
R : RED  
Y : YELLOW



unit: mm




SHAPE			
DIMENSIONS	$\phi$ 18	18x18	18x24

HEAD SHAPE

ADP16F4-0R0-E1T

ADP16F4-0S0-E1T

ADP16F4-0T0-E1T

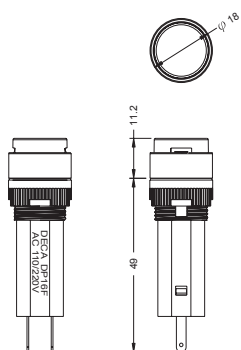

MOUNTING DIMENSIONS

Panel Thickness 0.5 To 5.0

