

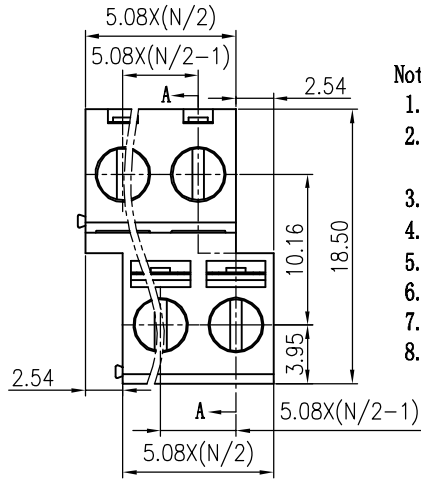
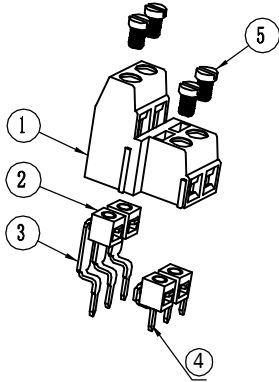

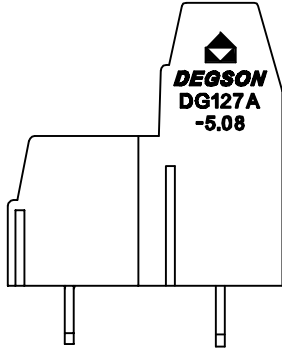
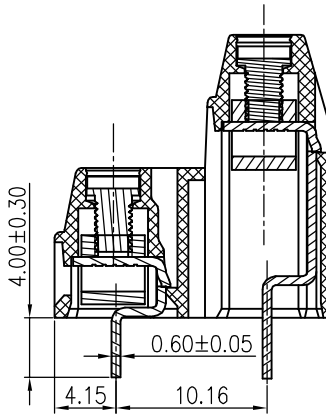


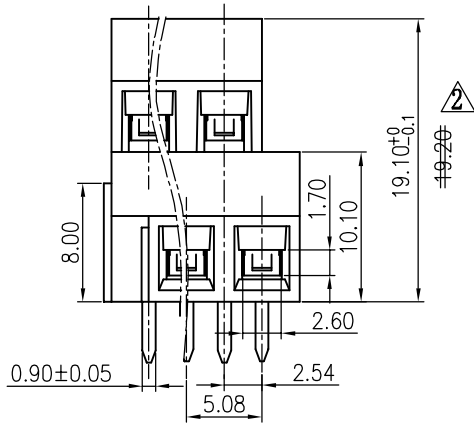


- Notes:
- 1. Pitch: 5.08mm , Poles: 4P-XXP
 - 2. Rated voltage/current: UL 300V/12A
VDE 250V/15A
 - 3. Operation temperatures: -40℃~+105℃
 - 4. Withstanding Voltage: AC2000V/1min
 - 5. Insulation Resistance: 5000MΩ/DC1000V
 - 6. Wire Range: 26-14AWG, 0.5-1.5mm²
 - 7. Max. Torque Value: M2.5, 4.08kgf.cm
 - 8. Undimensioned Tolerances:

REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
1		增加VDE, UL, CE刻字	Zengy	04/03/08*
2	08-0140	根据客户要求变更	Mickey	12/22/09*

Pitch range in mm			Nominal dimension range in mm					
to	over	to	to	over	over	over	over	
6	6 to 10	10 to 24	30 to 30	30 to 60	60 to 100	100 to 150	150 to 150	∩
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

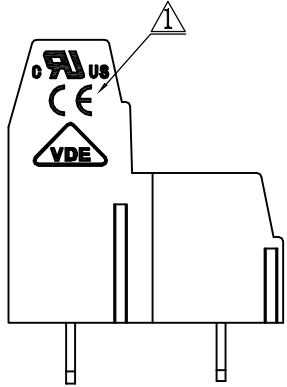

5	DG127 "—"Screws	S000001450(H)	XX	Steel	Cr ³ Zn
4	DG127-5.08-Pin	4028B00010(H)	XX/2	Brass	SnCe plated

3	DG127A-5.08-Pin	4107B00010(H)	XX/2	Brass	SnCe plated
2	DG127 Cage	X000000170(H)	XX	Brass	Ni plated
1	DG127A-5.08-Housing	4107A0YXXA(H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DETACHED LISTS	 MM (INCH)		 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD		
	TOLERANCES EXCEPT AS NOTED				
	DFTO Zhuhw DATE 04/23/08*				
	CHKD DATE				
	MFO DATE		NAME (注:XX为偶数) DG127A-5.08-XXP-1Y-00A(H)		
	APPLV DATE				
	MATERIAL :				
	ANGLES ± 1°				
	G.E :		DRAWING NO. DG127A-5.08-E01 /PART NO.		
	FINISH :				
SCALE : 1:1					
 THIRD ANGLE PROJECTION		DO NOT SCALE DRAWING			
		SHEET 1		OF 1	