

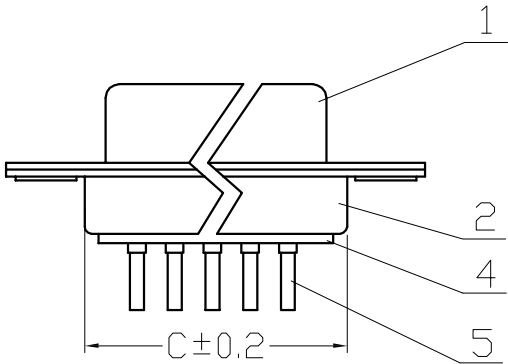


序号/RevNo.	名称/Title	文件编号/File No.
1	上铁壳	
2	下铁壳	
3	100F前塑料件	
4	100F后塑料件	
5	101F端子	

Specifications:
Contact Resistance: 30mΩ max.at DC 100 mA
Insulator Resistance: 1000MΩ min.at DC 500V
Current Rating: 5AMP

Dielectric Withstanding
Voltage: AC 1000V For 1 minute
Operating Temperature: -55℃- +105℃
Contact: Phosphor Bronze
Housing: PBT(BLACK)&30 % Glass Fiber(UL 94V-0)

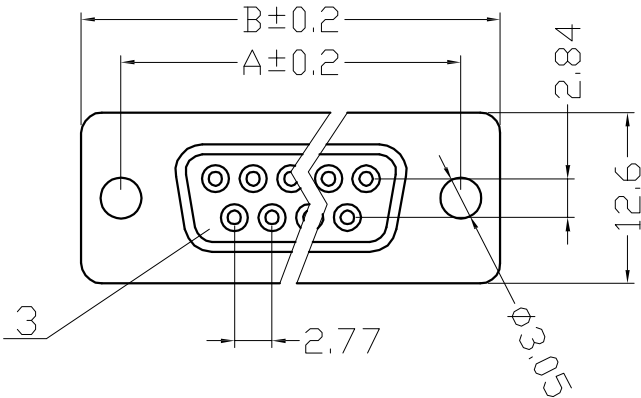

Position	A	B	C
9	24.99	30.81	19.36
15	33.32	39.20	27.64
25	47.04	53.10	41.08
37	63.50	69.50	57.38

序号/RevNo.	更改记录/Revision note	签名/Signature	日期/Date
-----------	--------------------	--------------	---------

设计/Designed by	绘图/Drawing by	审核/Checked by	批准/Approved by	未注公差 General Tolerance		
新莱亚电子 XINLAIYA ELECTRONIC CO.,LTD		图名/Title	文件编号/File No.		x. ±0.2	x.' ±2'
		101F 产品图	页序/Sheet		.x ±0.1	.x' ±1'
					.xx ±0.05	.xx' ±0.5'
					.xxx ±0.01	
备注 /Remark				单位/Units: mm		