




NEW

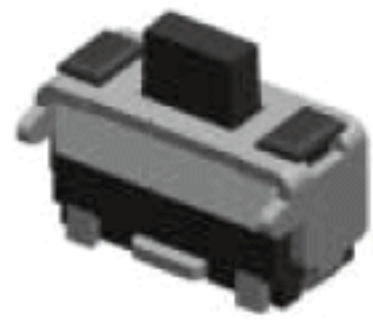



IT-1178GS

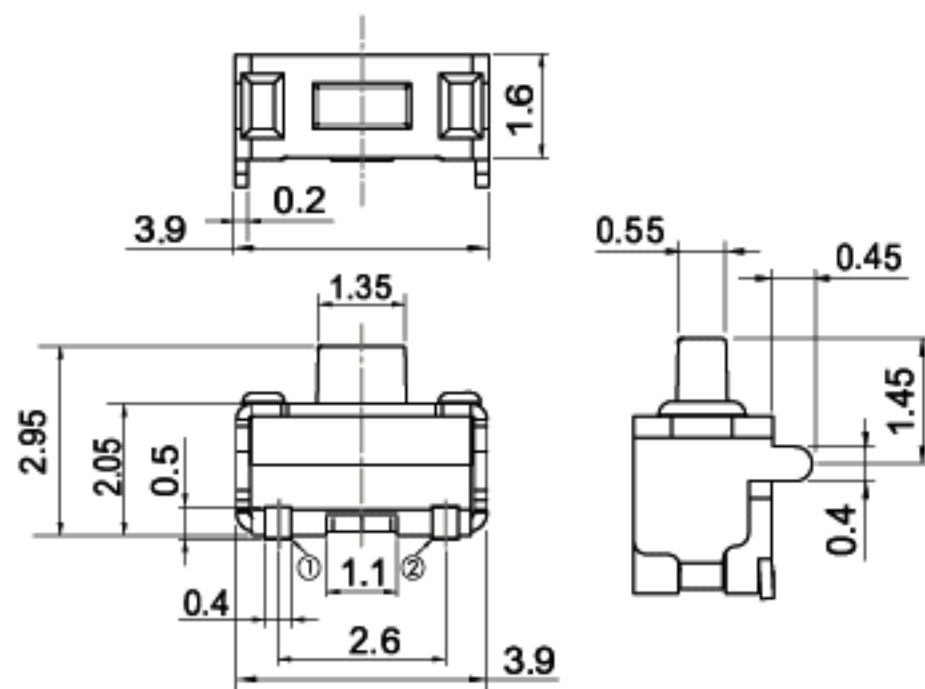



CIRCUIT DIAGRAM



Rating: 50mA 12V DC.
Travel: 0.15 ± 0.1 mm.
Contact resistance: 100mΩ Max.
Operating force: 160 ± 50 g.
Life: 100,000 Cycles.
Packing : 3,000pcs/reel.

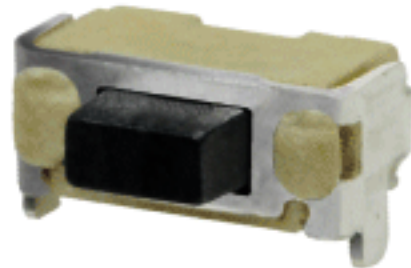
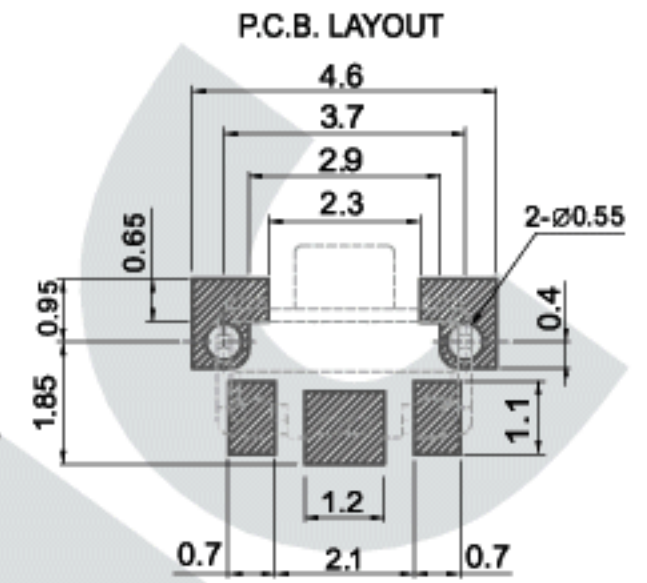


IT-1100AANP

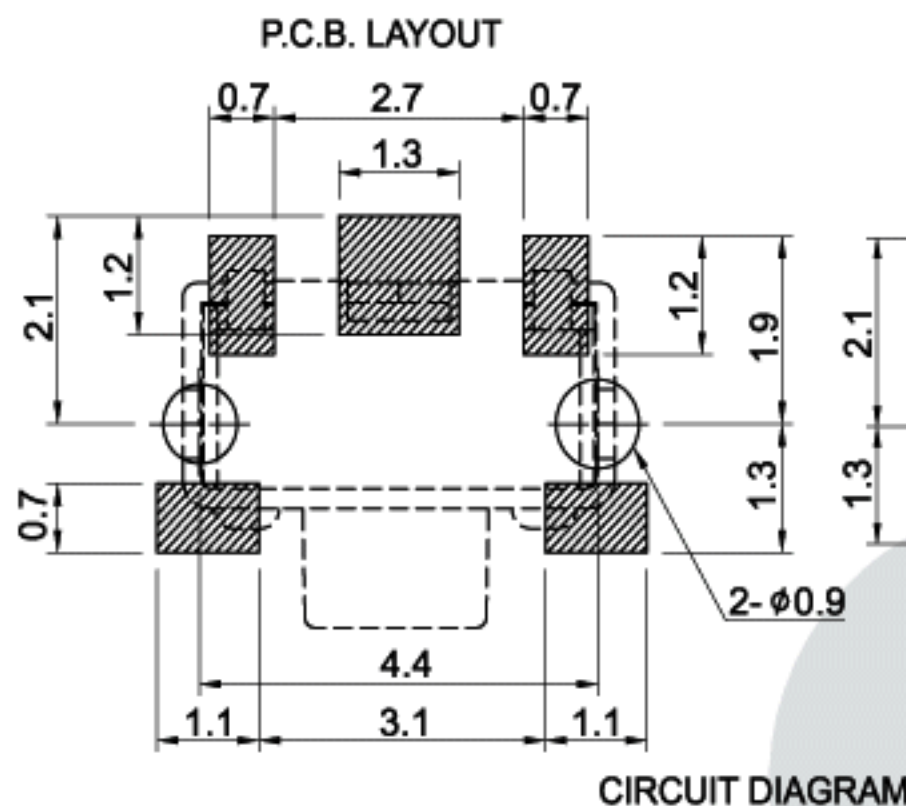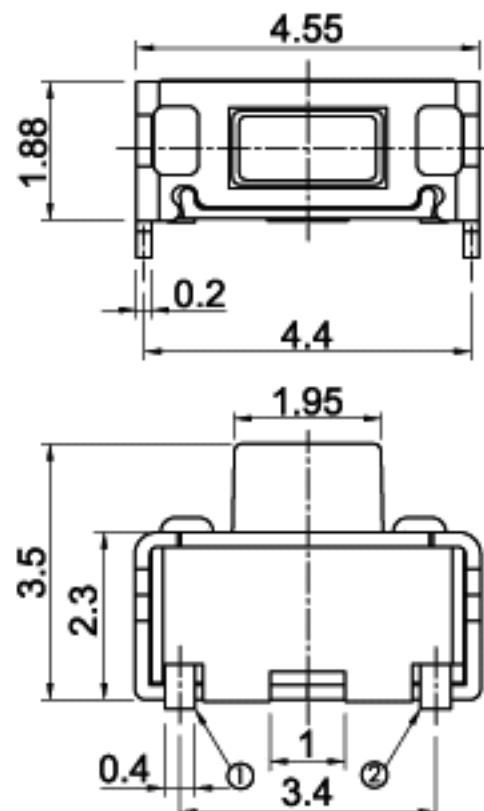


Rating: 50mA 12V DC.
Travel: 0.15 ± 0.1 mm.
Contact resistance: 100mΩ Max.
Operating force: 160 ± 50 g.
Life: 100,000 Cycles.
Packing : 3,000pcs/reel.


P.C.B. LAYOUT

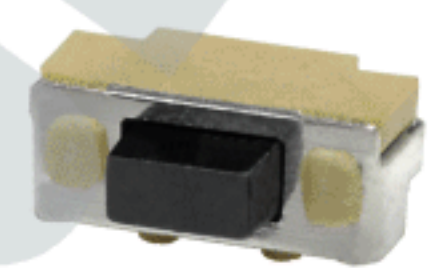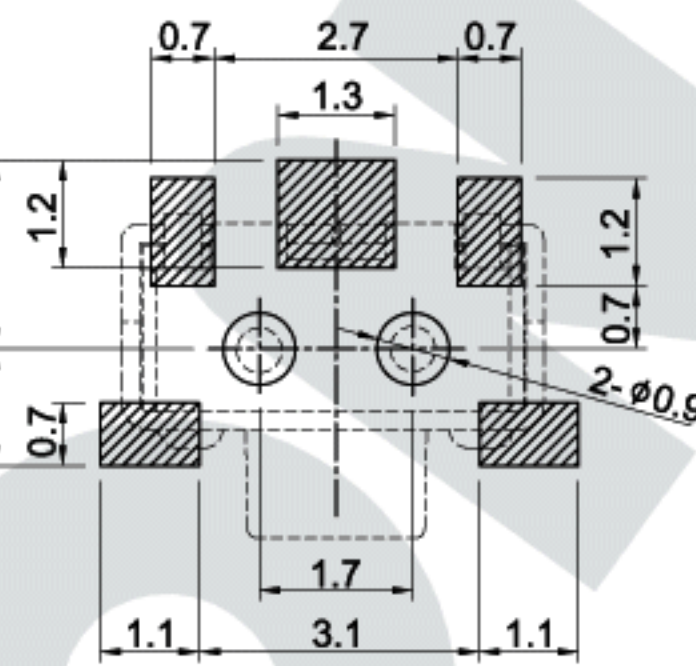

IT-1100AAEP-G

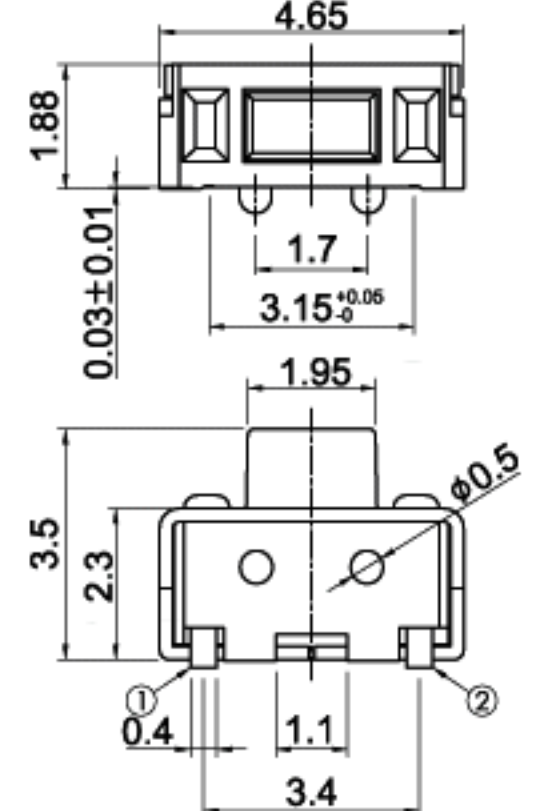

P.C.B. LAYOUT

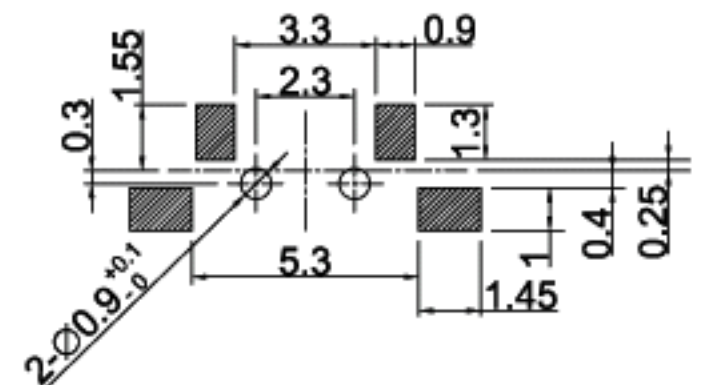


Rating : 50mA 12V DC Max.
Travel : 0.25 ± 0.1 mm.
Contact resistance : 100mΩ Max.
Operating force : 160 , 250 ± 50 g.
Life : 160g : 50,000 Cycles.
250g : 30,000 Cycles.
Packing : 2,000pcs/reel.




IT-1188E


IT-1188E: W/ Embossing
IT-1188 : W/O Embossing

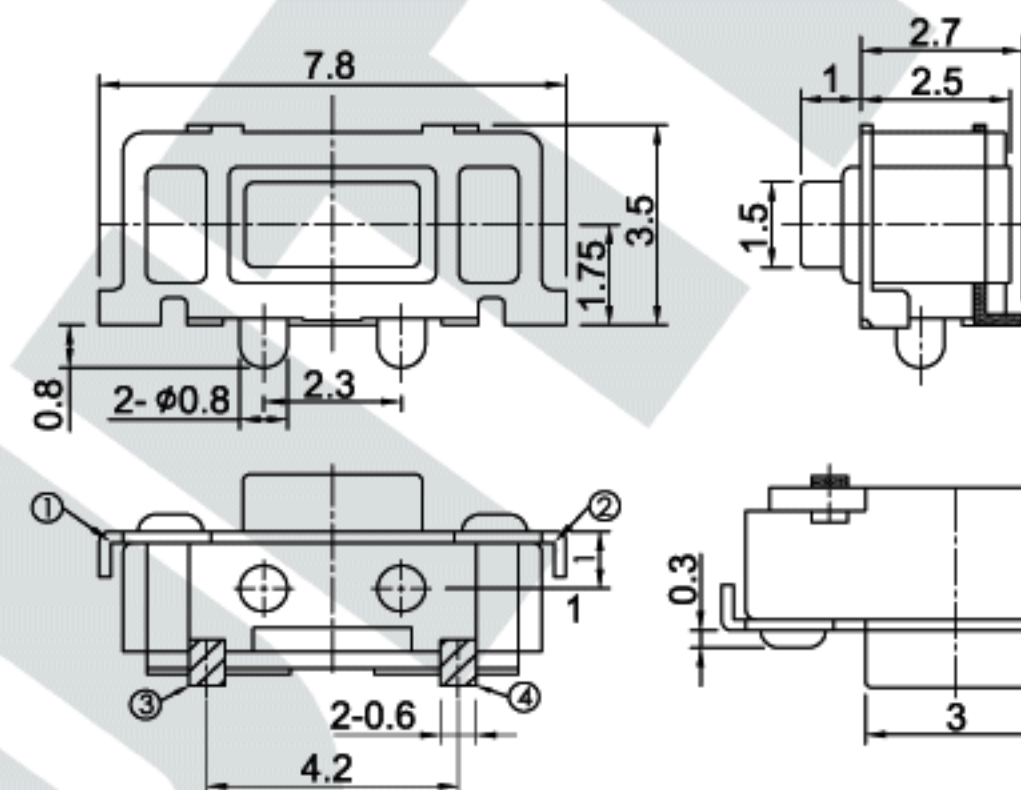


CIRCUIT DIAGRAM



P.C.B. LAYOUT

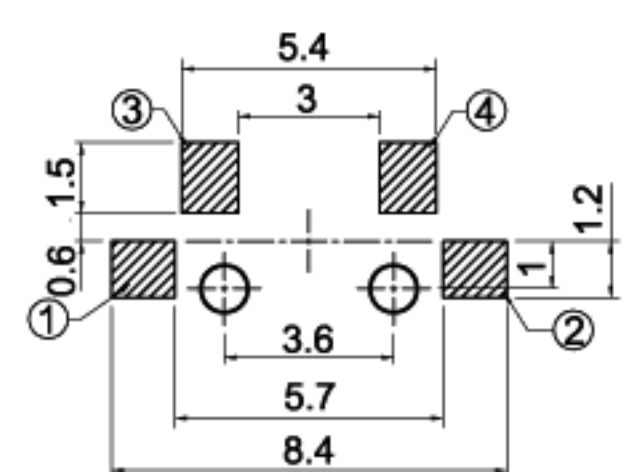

Rating : 50mA 12V DC Max.
Travel : 0.25 ± 0.1 mm.
Contact resistance : 100mΩ Max.
Operating force : 160 , 250 ± 50 g.
Life : 160g : 50,000 Cycles.
250g : 30,000 Cycles.
Packing : 2,000pcs/reel.

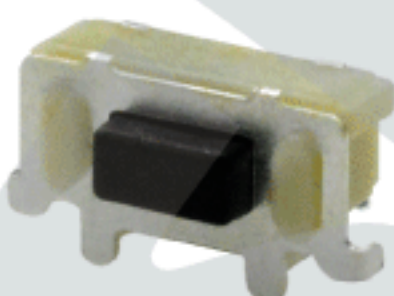

IT-1188P

CIRCUIT DIAGRAM

