
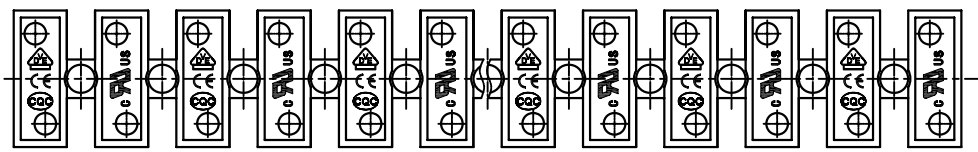

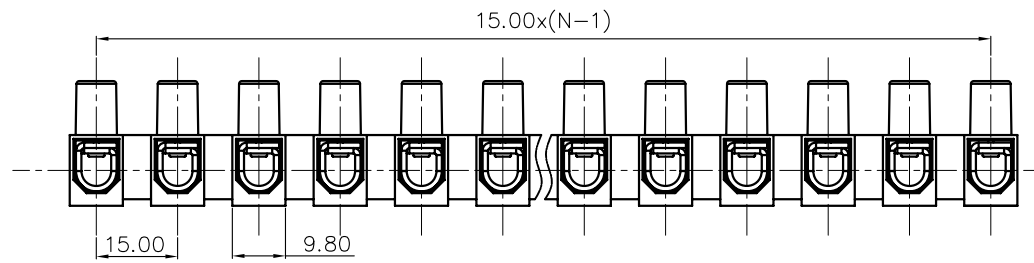


REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

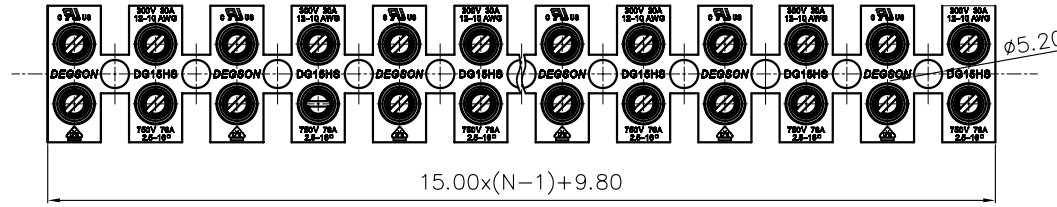

NOTES1:

- UL Standard
 1.Rated Voltage/Current : 300V / 30A
 2.Torque Value : M4 , 10.53Lb.in
 3.Wire Range : 12~10AWG

IEC Standard

- 1.Rated Voltage/Current : 750V / 76A
 2.Torque Value : M4 , 1.2N·m
 3.Wire Range : 2.5~16mm²

NOTES2:

- 1.Dimension shall be interpreted per ASME Y14.5-2009
 2.Pitch : 15.00mm, Poles : N=02~12P
 3.Stripping length : 8mm
 4.Withstanding Voltage : AC3000V/1Min.
 5.Operating temperature: -40°C~+105°C
 6.Undimensioned Tolerances:

Pitch range in mm	Nominal dimension range in mm						0.1/10		
	Over 6 TO 6	Over 10 TO 10	Over 10 TO 24	Over 30 TO 30	Over 60 TO 60	Over 100 TO 150			
	±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2*

7.RoHS Compliance

DG15HS-1.2 - XXP - 1Y - 100A (H)
 (Series No.) (Poles) (Single Pitch) (Color):1.(Grey)
 2.(Blue)
 3.(Black)
 4.(Green)
 5.(Orange)
 6.(Red)
 7.(Transparent)
 8.(Yellow)
 9.(White)

DETACHED LISTS	PART NO.:	/			宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD	
	APPD:	/			NAME: DG15HS-1.2-XXP-1Y-100A(H)	
	CHKD:	/			TITLE: CUSTOMER DRAWING	
	DRFT:	/			REV	DO
	THIRD ANGLE PROJECTION		DRAWING NO.:	/		SHEET
		MM (INCH)	DO NOT SCALE DRAWING		SCALE	1:1