


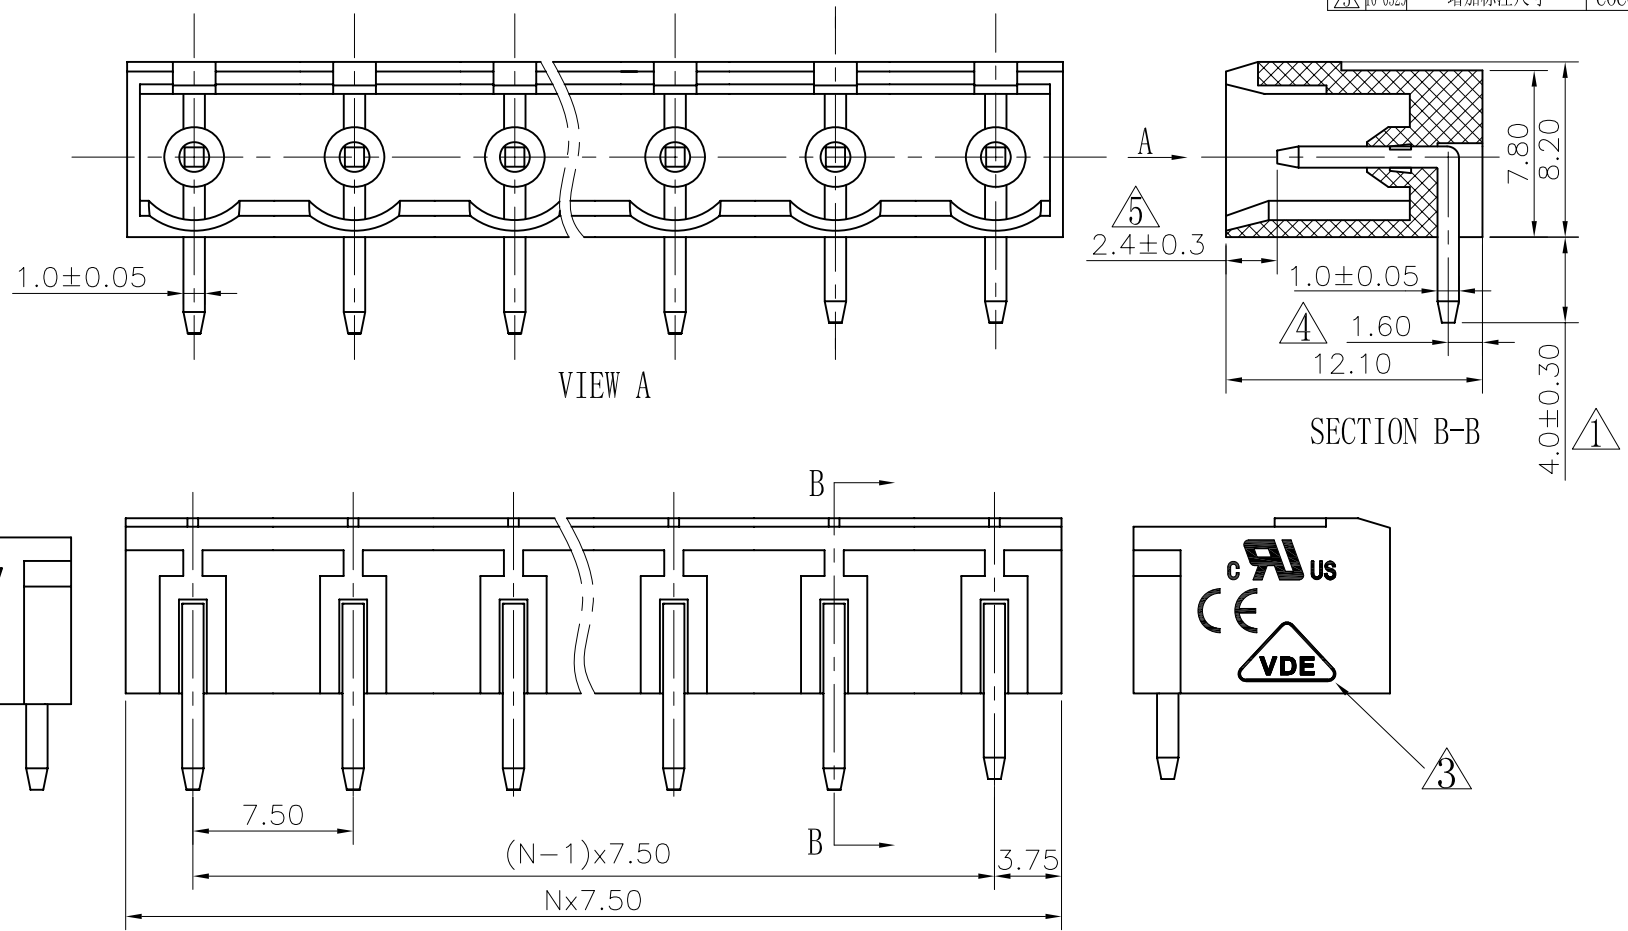

REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
1		4.5±0.1变更到4.0±0.3	DZJ	06/14/'05
2		图面更新	CSX	05/04/'06
3		增加VDE、CE刻字	Ye j	02/27/08*
4		更新图面	LJH	04/16/08*
5	10-0329	增加标注尺寸	COCO	10/05/10*

- Notes:
1. Pitch: 7.5mm , Poles: 2-24P
 2. Rated voltage/current: UL 300V/15A
VDE 400V/20A
 3. Operation temperatures: -40℃ ~ +105℃
 4. Withstanding Voltage: AC2000V/1Min
 5. Insulation Resistance: 5000MΩ/DC1000V
 6. Undimensioned Tolerances:

2	2EDGR Pin header	1008B00040 (H)	XX	Brass	SnCe
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
TOLERANCES EXCEPT AS NOTED		DFTO: Zhuwm DATE: 08/02/'04			
MM (INCH)		CHKD DATE			
.0 ±		MFO DATE			
.00 ±		APPLV DATE			
.000 ±		MATERIAL :			
ANGLES ± 1°		G.E :			
THIRD ANGLE PROJECTION		FINISH :			
		SCALE : 1:1			
		DO NOT SCALE DRAWING			
		SHEET 1 OF 1			

DEGSON® 宁波高正电子有限公司
DEGSON ELECTRONICS CO., LTD

NAME
2EDGR-7.5-XXP-1Y-00A(H)

DRAWING NO. 2EDGR-7.5-E01
/PART NO.

SIZE A3
REV T5
10/05/10*