
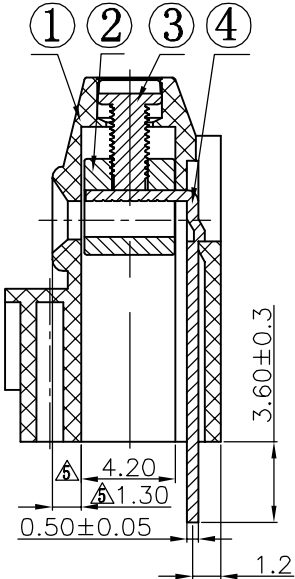

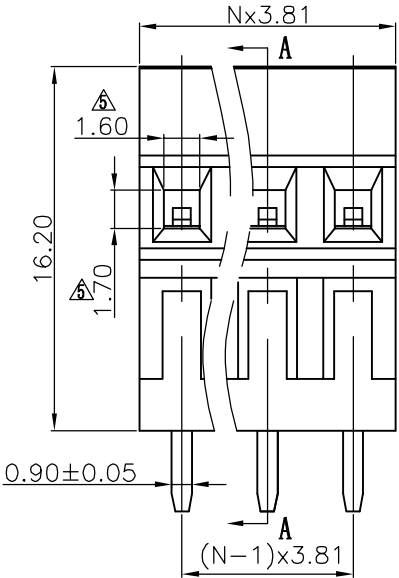



REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
△		Drawing Revise	Haoyh	03/06/06
△		增加UL刻字	CSX	10/10/06
△		增加VDE刻字	CSX	10/19/07
△		品名、料号增加环保标示“(H)”	CSX	12/10/07
△		按客户要求增加尺寸标注	LJH	04/25/08

- Notes:
1. Pitch:3.81mm , Poles:2-24P
 2. Rated voltage/current:UL 150V/10A
VDE 130V/10A
 3. Operation temperatures:-40℃~+105℃
 4. Withstanding Voltage:AC2000V/1min
 5. Insulation Resistance:5000MΩ/DC1000V
 6. Wire Range:26~16AWG, 1.0mm²
 7. Max. Torque Value:M2, 2.04kgf.cm
 8. Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm						
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/no

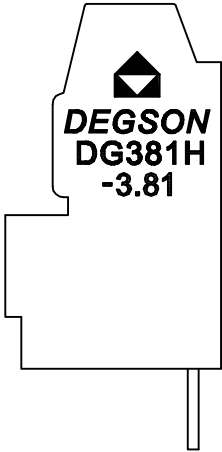

SECTION A-A

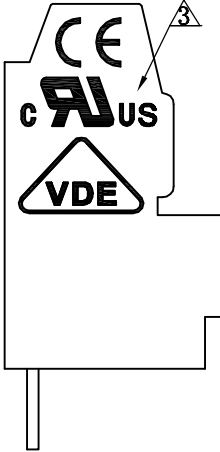

4	DG381H Pin header	4033B00010 (H)	XX	Phosphor bronze	SnCe
3	DG381 Screws	S000001440 (H)	XX	Steel	Cr ³⁺ Zn
2	DG381 Brass cage	X000000300 (H)	XX	Brass	Ni plated

1	DG381H-3.81-Housing	4033A0YXXA (H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
TOLERANCES EXCEPT AS NOTED		DFTO longxc	DATE 03/25/04"	 NAME DG381H-3.81-XXP-1Y-00A(H)	
MM (INCH)		CHKD	DATE		
TOLERANCES EXCEPT AS NOTED		MFO	DATE		
MM		APPVL	DATE		
ANGLES ± 1°		MATERIAL :		DRAWING NO. DG381H-3.81-E01	
THIRD ANGLE PROJECTION		G.E :		/PART NO.	
		FINISH :		DO NOT SCALE DRAWING	
		SCALE :		SHEET 1 OF 1	