



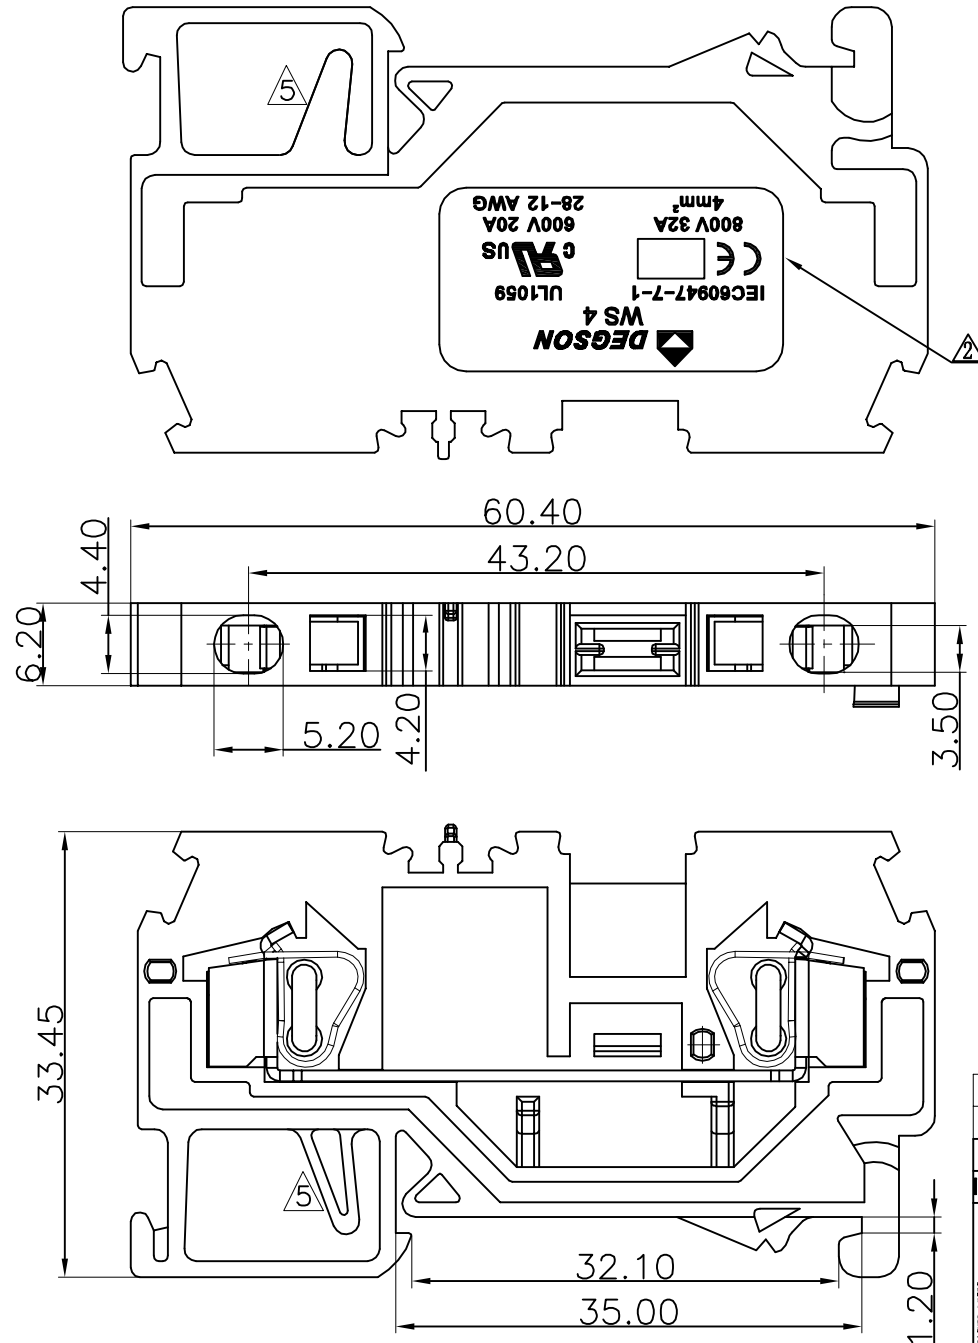


Notes:

- Rated current:UL:600V/20A
IEC:800V/32A
- Operation temperatures:-40° C~+105° C
- Withstanding Voltage: AC3000V/1Min
- Insulation Resistance:5000M Ω /DC1000V
- Wire Range: 28~12AWG 4mm²
- Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm						
to	over	to	to	over	over	over	over	over	
6	6 to 10	10 to 24	30 to 30	30 to 60	60 to 100	100 to 150	150 to 150	150 to 150	—
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	±0.05/10	◇

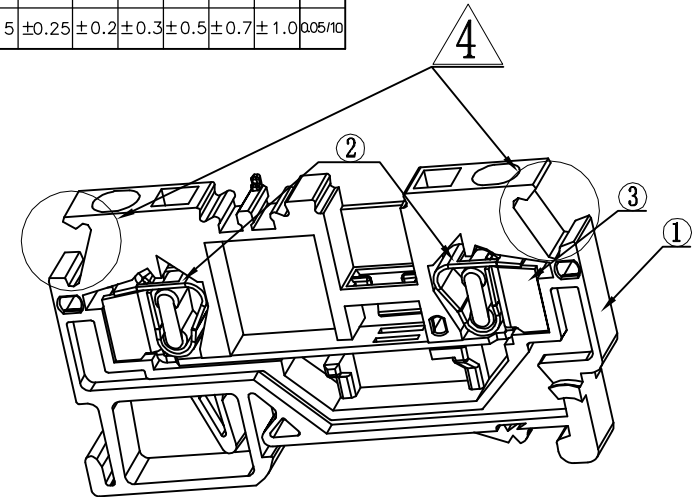

3	WS 4 Carrier	X000000610 (H)	1	Red copper	SnCe plated	
2	WS 4 Clamp	X000000600 (H)	2	Stainless steel		
1	WS 4 Housing	6001A0Y01A (H)	1	PA66	UL94V-0	
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES	
DETAILED LISTS			DPTD	Exsp/hy	DATE 01/11/05''	 DEGSON ® 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD
	TOLERANCES EXCEPT AS NOTED		CHKD		DATE	
			MPO		DATE	
			APPVL		DATE	
			MATERIAL :			
	ANGLES ± 1°		G. E :			
			FINISH :			
	THIRD ANGLE PROJECTION		SCALE : 1:1			
			DO NOT SCALE DRAWING			
			SHEET 1 OF 1			