

REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE

NOTES1:

UL Standard

- 1.Rated voltage/current : 600V / 10A
- 2.Withstanding voltage : AC2200V/1Min.
- 3.Wire range : 28~16AWG

IEC Standard

1.

Pollution degree	3
Overvoltage category	III
Rate impulse voltage(KV)	8.0KV
Rate voltage(V)	800V
Rate current(A)	18 A

- 2.Wire range : 0.2~1.5mm²




NOTES2:

- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Pitch : 4.0mm, Poles : 01P
- 3.Stripping length : 9~10mm
- 4.Operating temperature: -40°C~+105°C
- 5.Undimensioned tolerances:

Pitch range in mm		Nominal dimension range in mm							
TO	Over	Over	TO	Over	Over	Over	Over	0.1/10	
6	TO 6	TO 10	TO 24	TO 30	TO 60	TO 100	TO 150		
	±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°

6.RoHS Compliance

WS1.5-QU - 01P - 1Y - 00A (H)
(Series No.) (Poles) (Single Pitch) (Color):1.(Grey)
(RoHS)
00A-(Standard)
2.(Blue)
3.(Black)
4.(Green)
5.(Orange)
6.(Red)
7.(Transparent)
8.(Yellow)
9.(White)

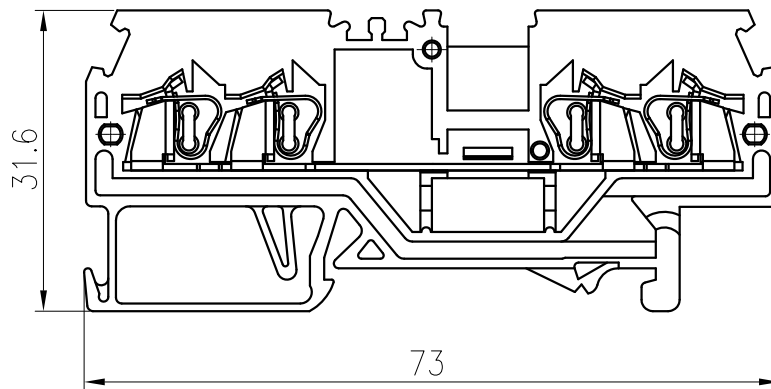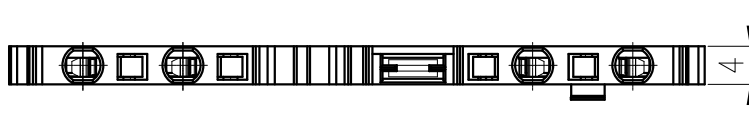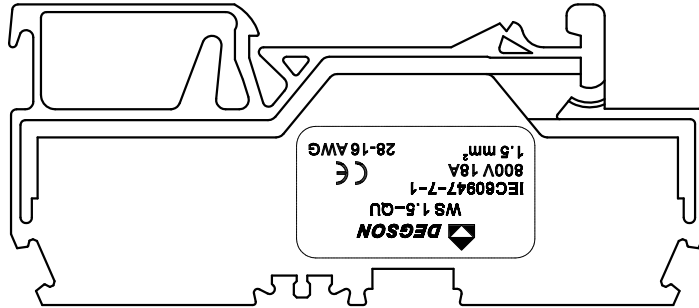

DETACHED LISTS	PART NO.: /		 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD			
	APPD: /		NAME: WS1.5-QU-01P-1Y-00A(H)			
	CHKD: /					
	DRFT: /		TITLE: CUSTOMER DRAWING		REV	DO
	 THIRD ANGLE PROJECTION		DRAWING NO.: /		SHEET	1/1
		MM (INCH)		DO NOT SCALE DRAWING	SCALE	1:1