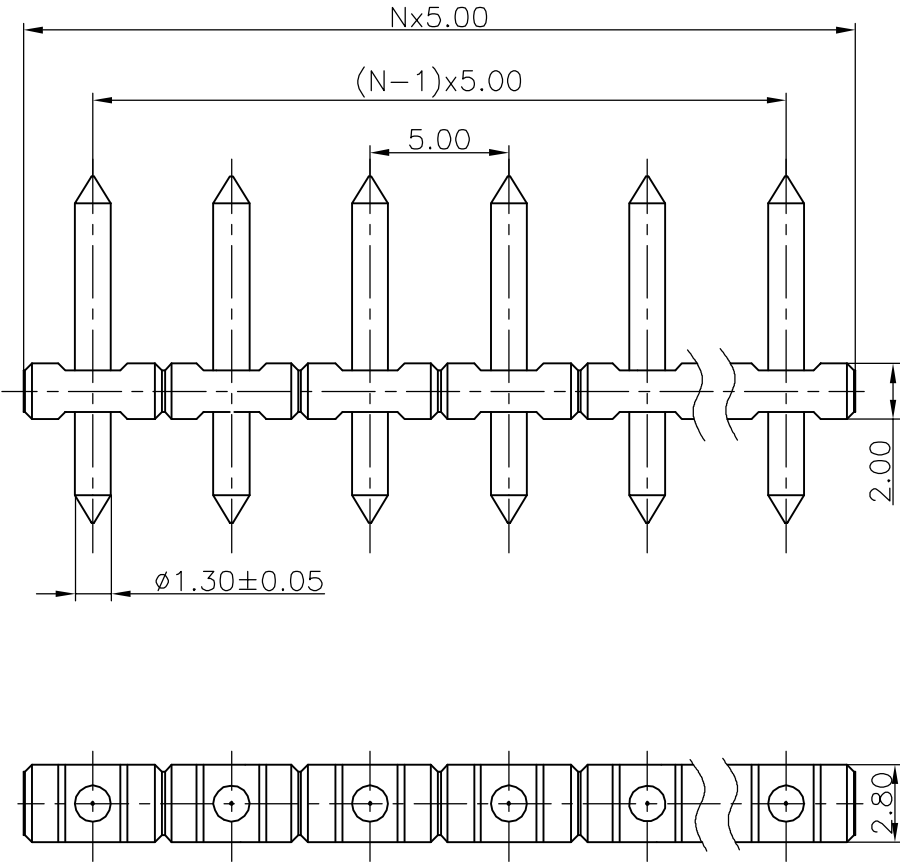


Material
Pin header: Brass,Tin plated
Housing: PA66+25%GF,UL94V-0
Electrical
Rated voltage: 300V
Rated current: 10A
Contact resistance: 20mΩ
Insulation resistance: 5000MΩ/1000V
Withstanding voltage: AC1500V/1Min
Mechanical
Temp,Range: -40° C~+105° C
MAX Soldering: +250° C,for 5 Sec

Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm					
	over 6	over 10	over 10	over 30	over 90	over 200		—
to 6	to 10	to 24	to 6	to 30	to 90	to 200	to 480	∇
±0.10	±0.15	±0.25	±0.1	±0.2	±0.3	±0.5	±0.7	005/10

2	DG332-Pin header	4014B00010(H)	XX	Brass	Tin plated
1	DG332J-5.0-XXP-1Y-00A-Housing	4014A0YXXA (H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DETAILED LISTS	MM (INCH)	DFTO Haoyh	DATE 05/12/05	DEGSON® 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD NAME DG332J-5.0-XXP-1Y-00A(H) DRAWING NO. DG332J-5.0-E05 /PART NO. DO NOT SCALE DRAWING SHEET 1 OF 1	
	TOLERANCES EXCEPT AS NOTED	CHKD	DATE		
	MM	MFO	DATE		
	.0 ±	APPVL	DATE		
	.00 ±				
	.000 ±				
ANGLES ± 1°		MATERIAL :		G.E :	
THIRD ANGLE PROJECTION		FINISH :		SCALE : 1:1	