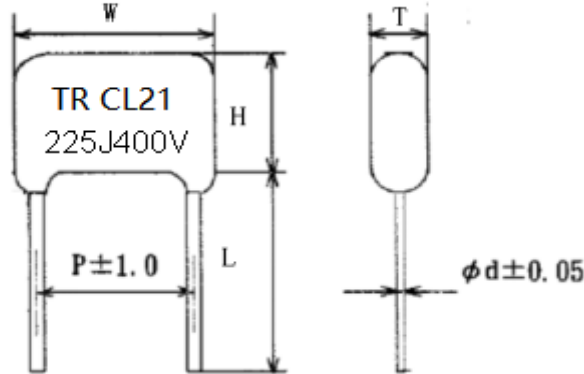


Customer: TRIATRON			Customer'S			P/N: 00110			JGS"S			P/N:CL21 225J400V P26MM(JGS47225J2GL26LL)					
Capacitance 容量		@ 1KHZ 23°C±3°C	Tolerance 误差	±5%	Rated Voltage 额定电压	@ 25°C 50/60HZ		DRAWING &MARKING	Protection/Coating 外封装		Flame retardant epoxy resin (UL94V-0)						
		2.2µF				400V			Resin filled 灌封								
Dielectric 介质		Polyseter film	Plates 导体	Metallized film	Construction 结构	Winding			Lead Wire 导线		Φ 0.8 Ctinned steel wires						
Dissipation Factor 损失角		@ 1K HZ 1Vrms 25°C max		50~60HZ			Colour 颜色		red								
				1KHZ	0,70%												
				10KHZ	1,30%												
				150KHZ													
Test Voltage 测试电压		1.6 times of rated voltage for 5 seconds cut off current at 10mA		DC lead to lead	640VDC												
				DC lead to case	VDC												
				AC lead to lead	VAC												
				AC lead to case	VAC												
Dielectric Withstanding Voltage 介质耐压强度		Between terminals 400VDCx 200% 1To 5 sec max			800VDC												
Insulation Resistance 绝缘阻抗		20°C@ 100 VDC 60 seconds min 20°C@VDC..... seconds min		Lead to lead	3000 MΩ/uf												
				Lead to case	MΩ												
dv/dt 单位时间电压变化率		max		Max pulse rise time	(v/sec)												
IpeakA 最大值电流		@70°C			Amps												
IrsmA 实效值电流		@70°C			Amps												
Surge/Pulse voltage 冲击电压		140% rated voltage max			VDC												
E.S.R 等效串联阻联阻抗值				Standard 依循标准	IEC60384-14												
Safety approval安规认证				Dimension(尺寸)mm													
				W(±0.5)		H(±0.5)		T(±0.5)		P(±1.0)							
				28,0		19,6		11,5		26,0							
				dø(±0.05)		L0(±3)											
				0,8		25,0											
Remark 备注: RoHS				Confirmation area 客户承认签回区				Operating Temperature 工作温度范围 From Minus -40 °C to Plus +125°C				Designer 设计师 丁亚维		Design code 设计代码: CL21 225J400V P26MM(JGS47225J2GL26LL)			
								DATE 日期: 2024-07-19				Drawing 绘图员 陈晓玉		Approval 核准		Drawing NO.	
								3RD ANGLE PROJECTION 第三角法									
								SCALE		~							