■Receptacle

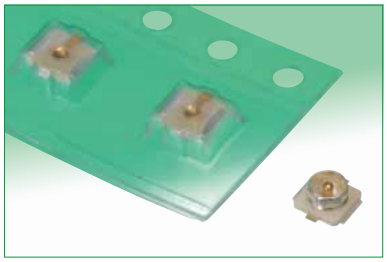

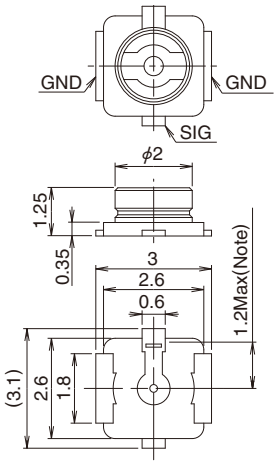

U.FL-R-SMT-1

◆Recommended PCB Mounting Pattern

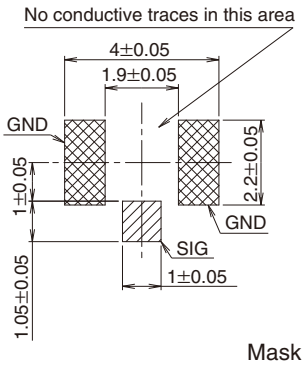

◆Recommended Metal Mask Dimensions



Mask Thickness : 0.1mm/0.12mm

Shell : Silver plated

Part No.	HRS No.	Packaging	Weight / EA
U.FL-R-SMT-1(01)	331-0472-2 01	100 pcs/pack	15.7/mg
U.FL-R-SMT-1(60)	331-0472-2 60	4,000 pcs/reel	
U.FL-R-SMT-1(80)	331-0472-2 80	10,000 pcs/reel	

(Note 1) The sales unit of the (01) specification receptacle is one pack (100 units per pack). Please order based on the number of packs.
(Note 2) The sales unit of the (60) specification receptacle is 1 reel (4,000 pcs per reel) so please order based on the number of reels.
(Note 3) The sales unit of the (80) specification receptacle is 1 reel (10,000 pcs per reel), so please order based on number of reels.
(Note 4) Tolerance value of mold resin applied to center contact.

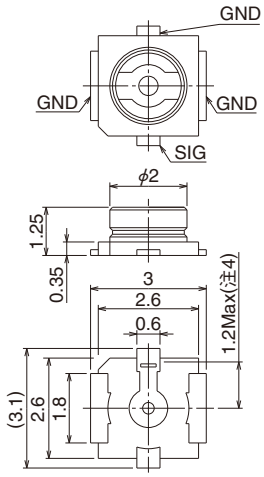

U.FL-R-SMT-K

◆Recommended PCB Mounting Pattern

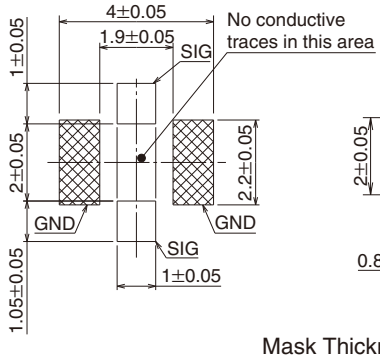

◆Recommended Metal Mask Dimensions



Mask Thickness : 0.1mm/0.12mm

Shell : Gold plated

Part No.	HRS No.	Packaging	Mass
U.FL-R-SMT-K(800)	480-0761-0 00	10,000 pcs per reel	15.7/pc

(Note 5) The sales unit of the receptacle is 1 reel (10,000 pcs per reel), so please order based on the number of reels.

●Embossed Carrier Tape Dimensions(IEC 60286-3 compliant)

Embossed Carrier Tape Dimensions

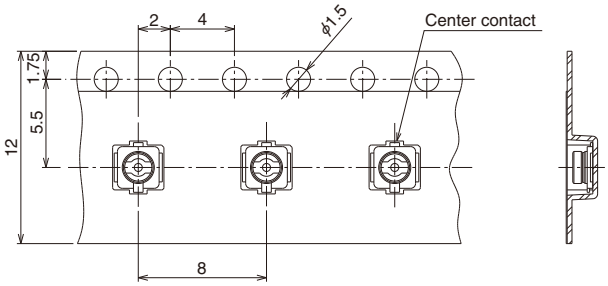

U.FL-R-SMT-1(60) : 8mm pitch

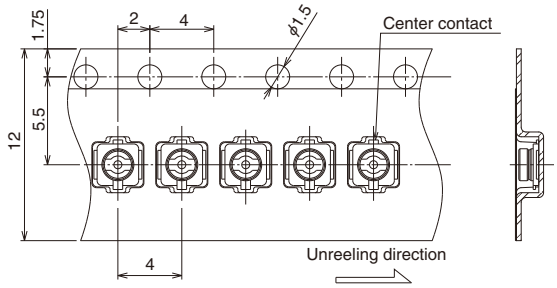

U.FL-R-SMT-1(80) / U.FL-R-SMT-K(800) : 4mm pitch

◆Reel Dimensions

Material : PS(Black) U.FL-R-SMT-1
PS(White) U.FL-R-SMT-K

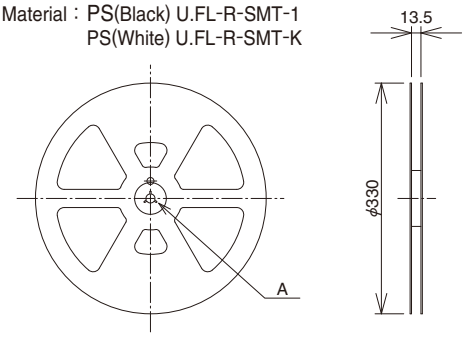

A(SCALE FREE)



Jan.1.2021 Copyright 2021 HIROSE ELECTRIC CO., LTD. All Rights Reserved.