

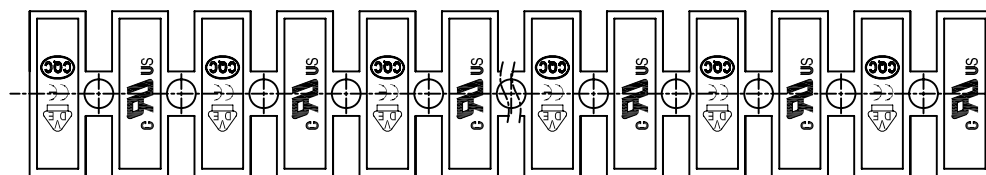
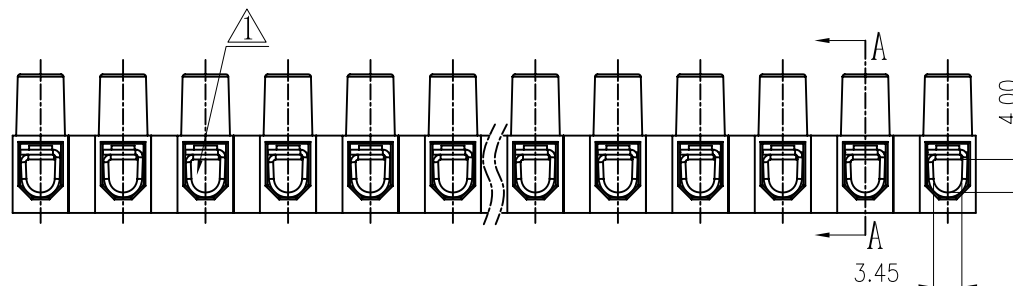


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
1		工程变更，去掉档线板	Zengy	07/21/08
2		品名中加上塑件底高"1.2"	Zengy	09/09/08
3		增加WDE线径刻字	Zengy	09/27/08
4		修改品名中"10A"为"100A"	LJH	11/01/08
5		增加参数及刻字	LJH	02/12/09

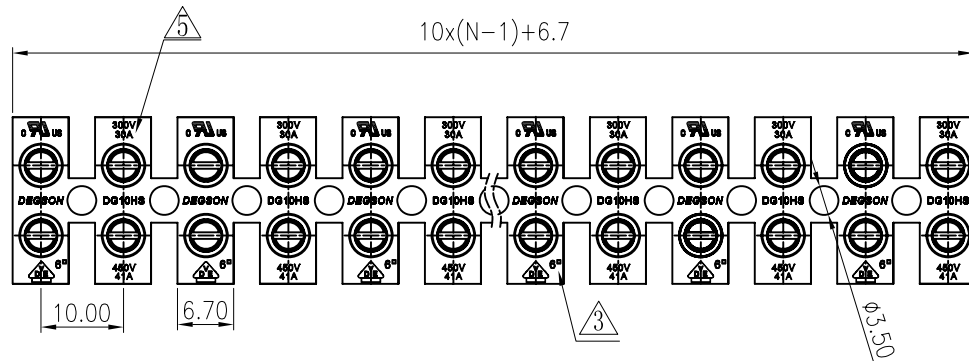

Notes:

1. Pitch:10. 0, Poles:2-12P
2. Rated voltage/Current:UL 300V 30A 
VDE 450V 41A
3. Operation temperatures:-40℃~+105℃
4. Withstanding Voltage:AC2000V/1Min
5. Insulation Resistance:5000MΩ /DC1000V
6. Wier Range:18-10AWG, 1-6mm²
7. Max. Torque Value:M3, 5. 1kgf. cm
8. Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range					—
	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150		
to 6								
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	

3	DG10HS-Current carrier	X000002130 (H)	XX	Steel	Cr ³⁺ Zn
2	DG10HS"-Screw	S000003000 (H)	XX*2	Steel	Cr ³⁺ Zn
1	DG10HS-1. 2- Housing	2023A0YXXA (H)	1	PA66	UL94V-2
ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES

DETACHED LISTS	MM (INCH)		DFTO LIN		DATE 02/22/08*		 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD			
	TOLERANCES EXCEPT AS NOTED		CHKD		DATE		NAME 2 4 DG10HS-1.2-XXP-1Y-100A (H)			
			MFD		DATE					
			APPLV		DATE					
	MM .0 ± .00 ± .000 ±		± ± ±		MATERIAL :		DRAWING NO. DG10HS-E06 SIZE A4 REV T5 02/12/09*			
	ANGLES ± 1°		G.E :		/PART NO.					
	 THIRD ANGLE PROJECTION		FINISH:							
			SCALE : 1:1		DO NOT SCALE DRAWING				SHEET 1 OF 1	