
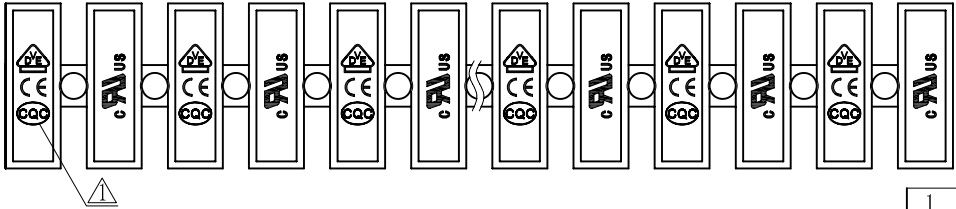
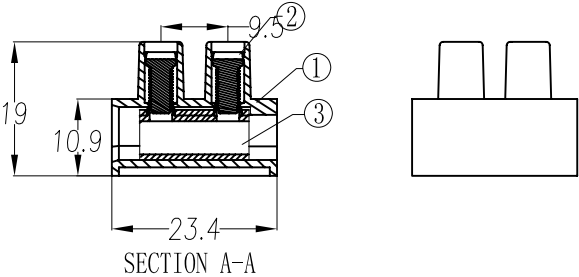
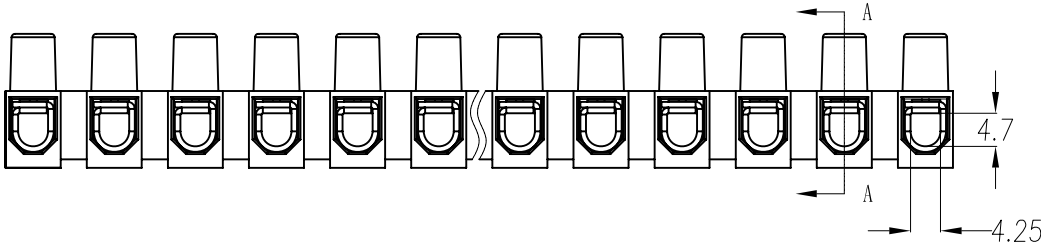


REVISION RECORD				
REV	ECD	DESCRIPTION	DRFT	DATE
△		增加UL, CQC 刻字及结构修改	Zengy	06/30/09"
△		修改UL 参数	Zengy	07/14/09"

Notes:

1. Pitch:11.5mm , Poles:2-12P
2. Rated voltage/current:UL 300V/50A
VDE 750V/57A
3. Operation temperatures:-40℃ ~+105℃
4. Withstanding Voltage:AC3000V/1Min
5. Insulation Resistance:5000MΩ /DC1000V
6. Wire Range:14~8AWG, 1.5~10mm²
7. Max. Torque Value:M3. 5, 8. 16kgf. cm
8. Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm						
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

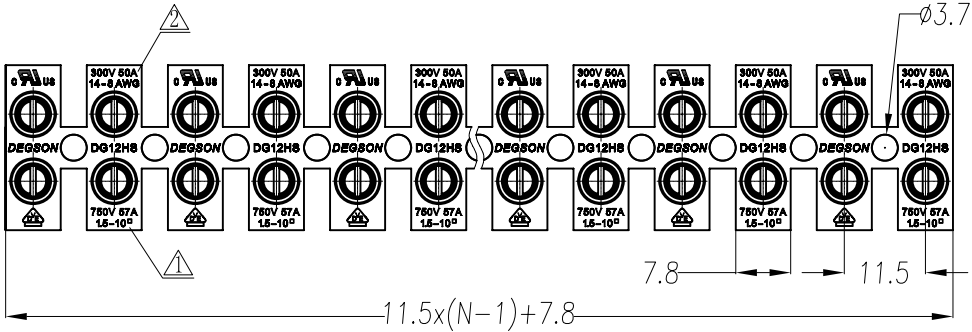

3	DG12HS Current carrier	X000003280 (H)	XX	Steel	Cr ³⁺ Zn
2	DG12H Screws	S000001190 (H)	2*XX	Steel	Cr ³⁺ Zn

1	DG12HS HOUSING	2024A0YXXA (H)	1	PA66	UL94V-2
ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES
DETACHED LISTS	MM (INCH)	DATE 04/30/08"	DEGSON 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD		
	TOLERANCES EXCEPT AS NOTED	CHKD DATE			
	MM	MFD DATE			
	.00 ±	APPVL DATE			
	.000 ±		NAME DG12HS-1.2-XXP-1Y-100A(H)		
ANGLES ± 1°		G.E :	DRAWING NO. DG12HS-1.2-E02		SIZE A3
THIRD ANGLE PROJECTION		FINISH:	/PART NO.		REV T2 07/14/09"
		SCALE :	DO NOT SCALE DRAWING		SHEET 1 OF 1