


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
△		Drawing Revise	Haoyh	03/14/06
△		增加VDE、CE标志	LJH	12/24/07

- Notes:
- 1.pitch: 5.0mm
 - 2.Rated voltage/current:UL 300V/10A
VDE 250V/24A
 - 3.Insulation resistance: 5000MΩ/1000V
 - 4.Withstanding voltage: AC2000V/1Min
 - 5.Wire range: 22-14AWG 2.5mm²
 - 6.Temp,Range: -30° C~+120° C
 - 7.Torque: 5.10kgf.cm
 - 8.Undimensioned Tolerances:

Pitch range in mm		Naminl dimension range in mm						
to	over	to	over	to	over	to	over	
6	6 to 10	10 to 24	30 to 60	60 to 100	100 to 150	150 to 150	150 to 150	—
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

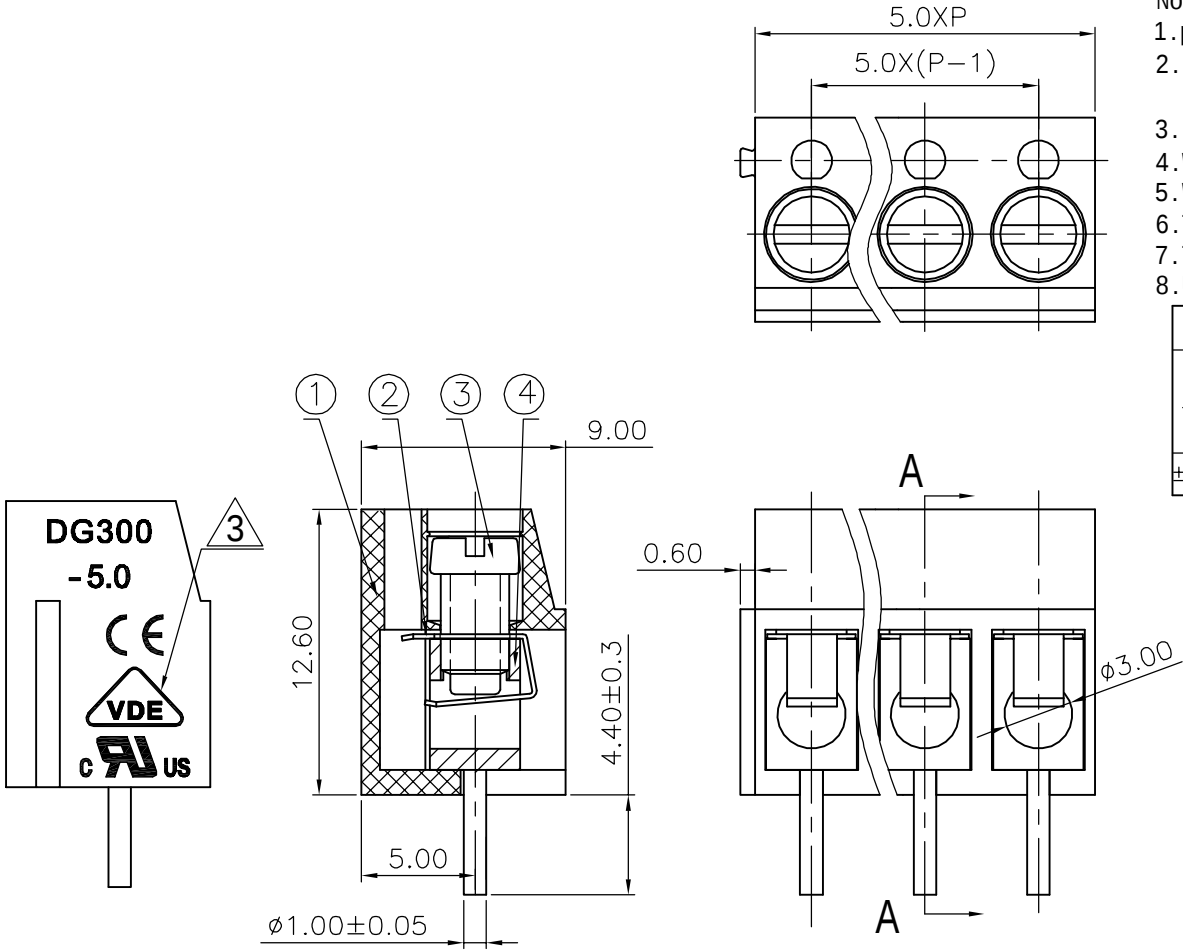

SECTION A-A

4	DG300(A) Pin header	4001B00010(H)	XX	Brass	SnCe
3	DG300 Screws	S000001380(H)	XX	Steel	Cr ³⁺ Zn
2	DG300 Spring	X000000230(H)	XX	Stainless steel	

1	DG300-5.0-Housing	4007A0YXXA(H)	1	PBT	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
TOLERANCES EXCEPT AS NOTED		DFTO huangwei	DATE 01/27/05	DEGSON ® 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD	
MM (INCH)		CHKD	DATE		
TOLERANCES EXCEPT AS NOTED		MFO	DATE		
MM		APPVL	DATE		
.0 ±	±	MATERIAL :		NAME	
.00 ±	±	ANGLES ± 1°		DG300-5.0-XXP-1Y-00A(H)	
.000 ±	±	THIRD ANGLE PROJECTION		DRAWING NO. DG300-5.0-E02	
		FINISH :		/PART NO.	
		SCALE : 1:1		DO NOT SCALE DRAWING	
				SHEET 1 OF 1	