


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
△		Drawing Revise	Haoyh	03/14/06
△		修改刻字	CSX	12/28/06
△		品名、料号增加环保标示“(H)”	CSX	12/10/07

- Notes:
- 1.pitch: 5.0mm
 - 2. Rated voltage/current: UL 300V/15A
VDE 250V/17.5A
 - 3. Insulation resistance: 5000M Ω /1000V
 - 4. Withstanding voltage: AC2000V/1Min
 - 5. Wire range: 22-14AWG 1.5mm²
 - 6. Temp, Range: -30° C ~ +120° C
 - 7. Torque: 4.08kgf.cm
 - 8. Undimensioned Tolerances:

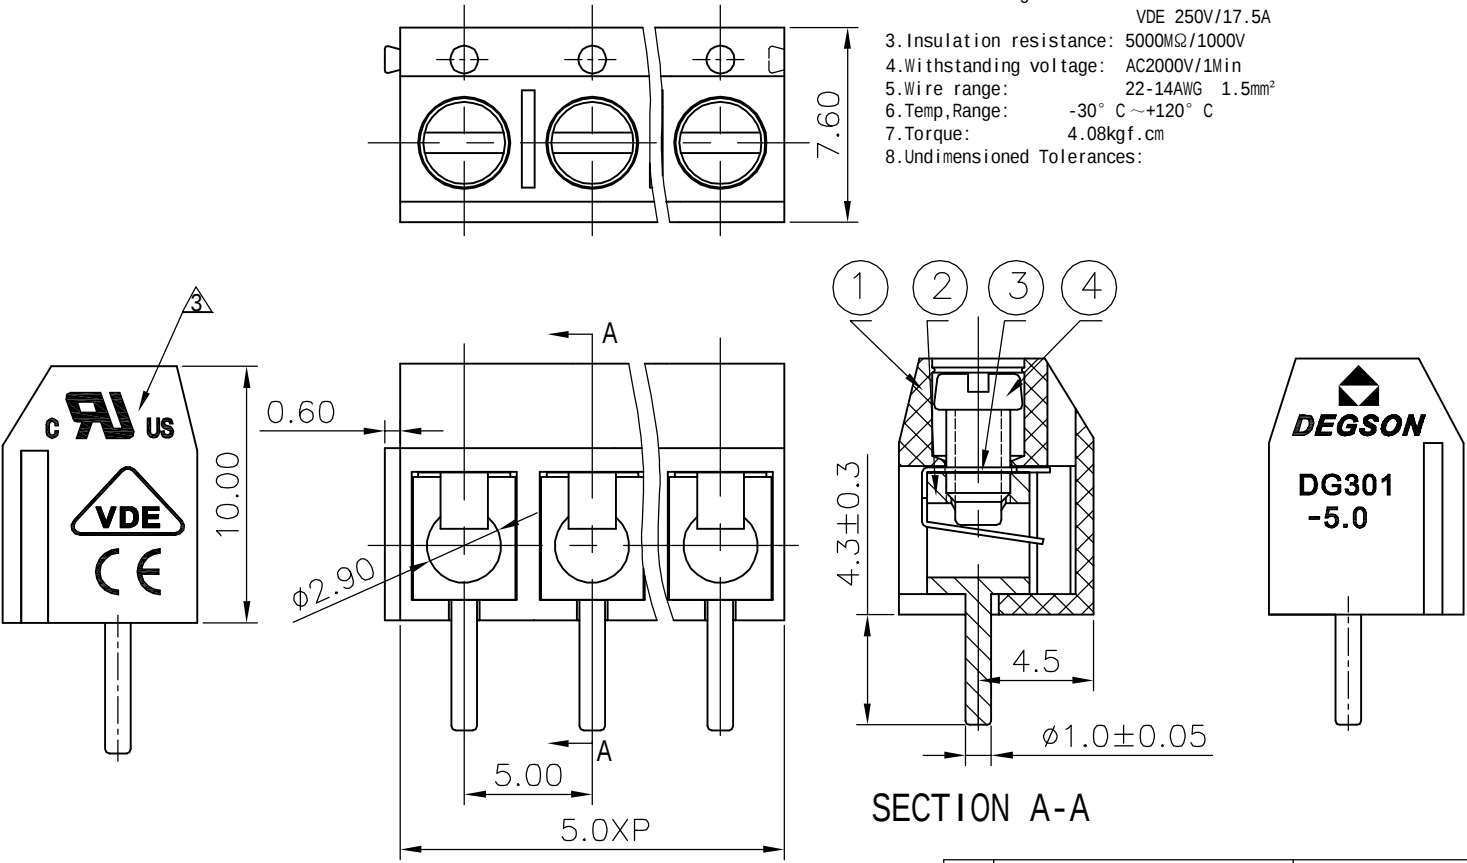

4	DG301-Screws	S000001420(H)	XX	Steel	Cr ³⁺ Zn
3	DG301-Spring	X000000250(H)	XX	Stainless steel	
2	DG301(A)-pin header	4004B00010(H)	XX	Brass	SnCe

1	DG301-5.0 Housing	4004A0YXXA(H)	1	PBT	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
TOLERANCES EXCEPT AS NOTED		DATE 01/05/05	DEGSON® 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD NAME DG301-5.0-XXP-1Y-00A(H) DRAWING NO. DG301-5.0-E01 /PART NO. DO NOT SCALE DRAWING		
MM	±	DATE			
.0 ±	±	DATE			
.00 ±	±	DATE			
.000 ±	±	DATE			
ANGLES ± 1°		G.E :	SIZE A3		
THIRD ANGLE PROJECTION		FINISH :			
		SCALE : 1:1	REV T4 12/10/07		
			SHEET 1 OF 1		