


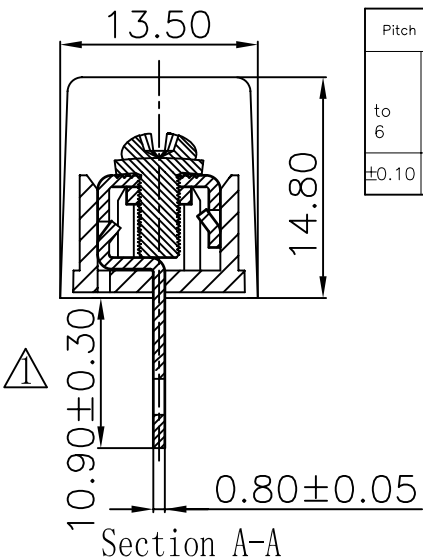
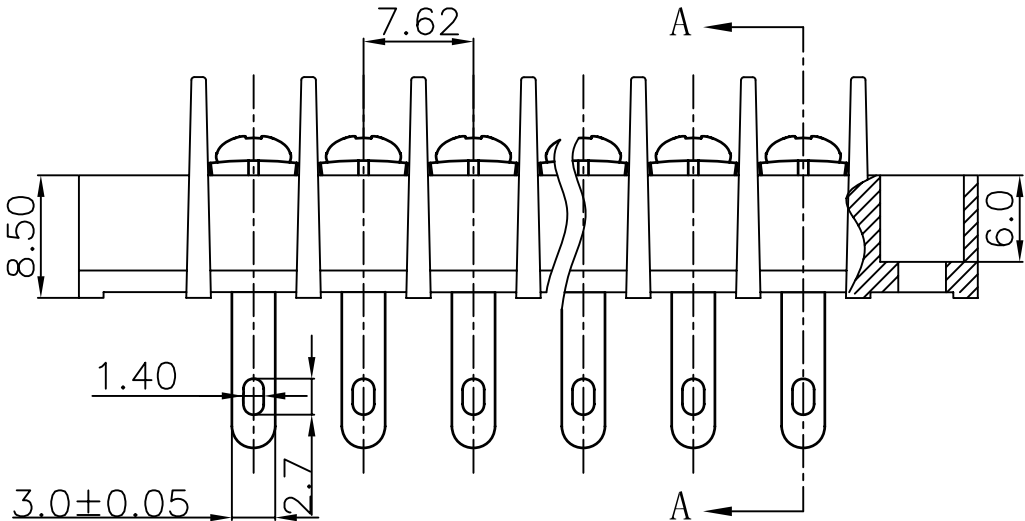


REVISION RECORD					
REV	ECO	DESCRIPTION	DRFT	DATE	
1		10.4±0.1变更10.9±0.30	hefei	05\18\05	
2		图面更新	CSX	02\16\06	
3		修改图面	CSX	08\05\06	
4		增加UL刻字	YeJ	11\06\06	
5		品名、料号增加环保标识“(H)”	YeJ	12\08\07	

NOTES:

1. Pitch:7.62mm
2. Rated current:15A
3. Rated voltage:300V
4. Operation temperatures:-40° C~+105° C
5. Insulation Withstand Voltage:AC2000V/1Min
6. Insulation Resistance:500MΩ /DC500V
7. Wire Range:22~14AWG
8. Max. Torque:5.1kgf. cm
9. Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm						
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150		
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10	

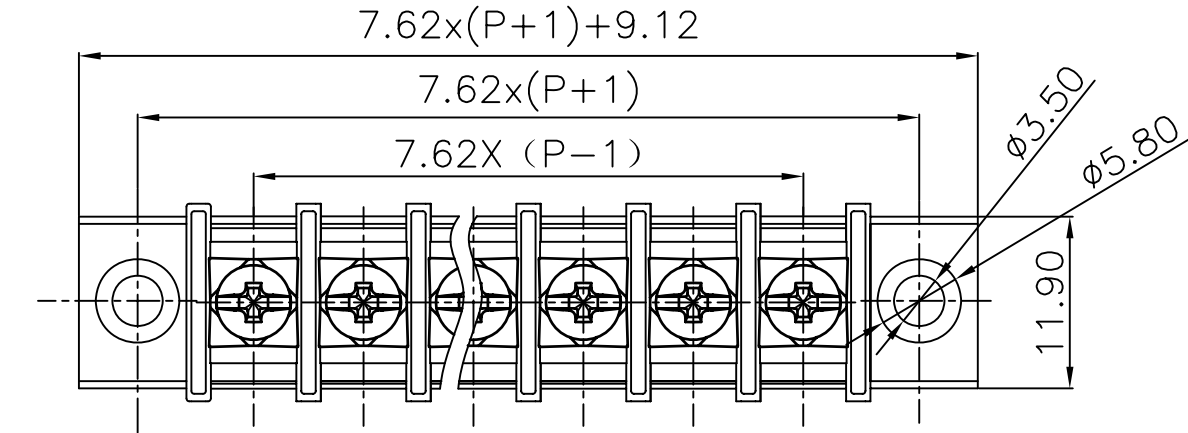

3	3*6 bright-Screw	S000000450 (H)	XX	Steel	Ni Plated
2	DG25H-Pin Header	5001B00030 (H)	XX	Brass	SnCe
1	DG25H-A Housing	5001M0YXXA (H)	1	PA66	UL94V-0

ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES
DEGSON 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD NAME DG25H-A-XXP-1Y-00A(H) DRAWING NO. DG25H-E03 SIZE A3 REV T5 DATE 12/08/07					
DO NOT SCALE DRAWING SHEET 1 OF 1					

DETOCHED LISTS	MM (INCH)	DFTO hefei	DATE 05\13\05
TOLERANCES EXCEPT AS NOTED		CHKD	DATE
		MFO	DATE
		APPVL	DATE
		MATERIAL :	
		G.E :	
		FINISH :	
		SCALE : 1:1	
		THIRD ANGLE PROJECTION	