

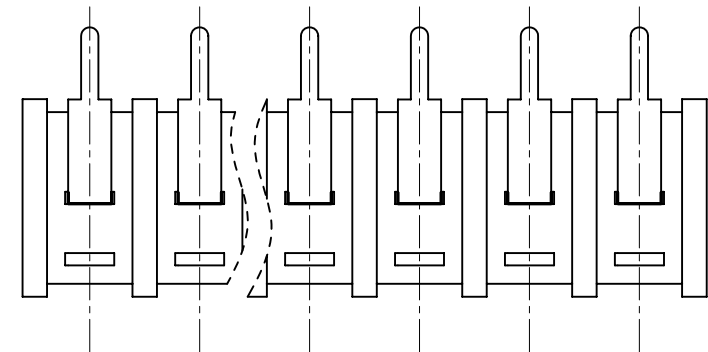
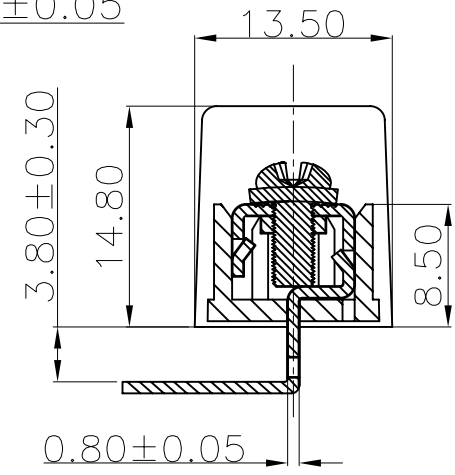
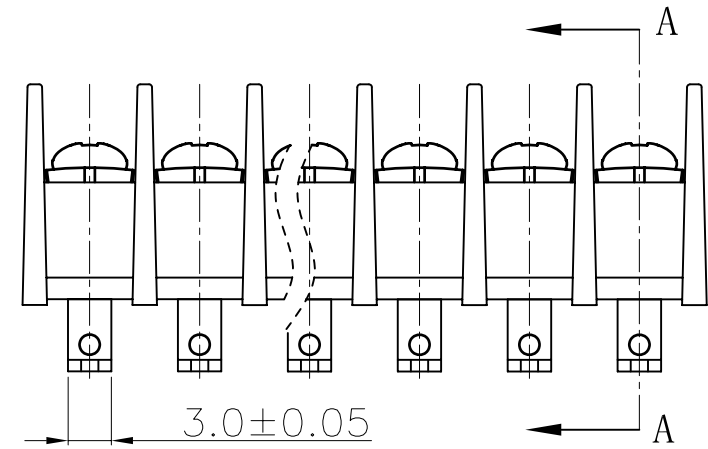


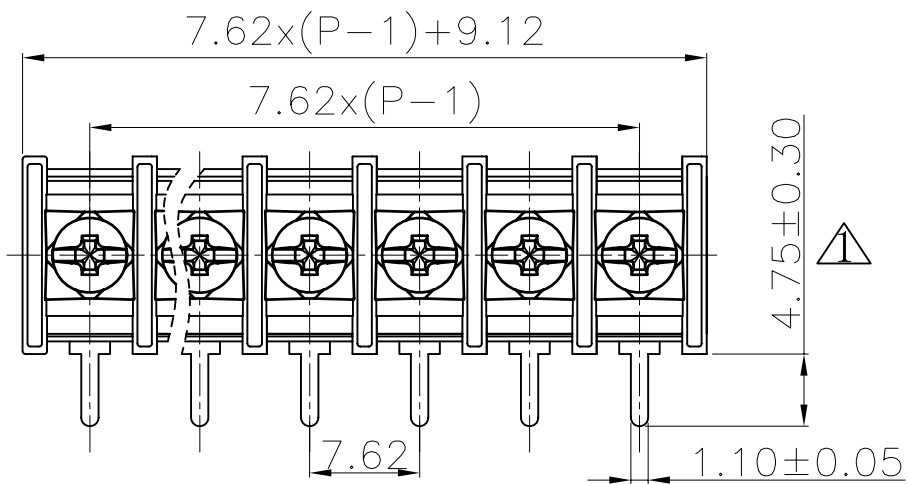

REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
1		出脚依实物及理论值由5.00±0.10改到4.75±0.30	CSX	06/07/05
2		图面更新	CSX	07/20/06
3		增加UL刻字	YeJ	11/06/06
4		品名、料号增加环保标识“(H)”	YeJ	12/08/07

- NOTES:
- 1. Pitch: 7.62mm
 - 2. Rated current: 15A
 - 3. Rated voltage: 300V
 - 4. Operation temperatures: -40° C~+105° C
 - 5. Insulation Withstand Voltage: AC2000V/1min
 - 6. Insulation Resistance: 500MΩ/DC500V
 - 7. Wire Range: 22~14AWG
 - 8. Max. Torque: 5.10kgf.cm
 - 9. Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm						
to	over	to	to	over	over	over	over		
6	6	10	10	30	60	100	150		—
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10	∩



Section A-A

3	3*6 bright-Screw	S000000450 (H)	XX	Steel	Ni Plated
2	DG25R-Pin Header	5001B00060 (H)	XX	Brass	SnCe
1	DG25R-B-Housing	5001A0YXXA (H)	1	PA66	UL94V-0

DETACHED LISTS	MM (INCH)		DFTO Zhuwm	DATE 03/03/04"	 DEGSON[®] 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD			
	TOLERANCES EXCEPT AS NOTED		CHKD	DATE				
			MFO	DATE	NAME DG25R-B-XXP-1Y-00A(H)			
			APPVL	DATE				
	MM .0 ± .00 ± .000 ±		± ± ±	MATERIAL :		DRAWING NO. DG25R-E01 /PART NO. SIZE A3 REV T4 12/08/07		
	ANGLES ± 1°		G.E :					
			FINISH :					
	THIRD ANGLE PROJECTION		SCALE : 1:1		DO NOT SCALE DRAWING			
					SHEET 1 OF 1			