
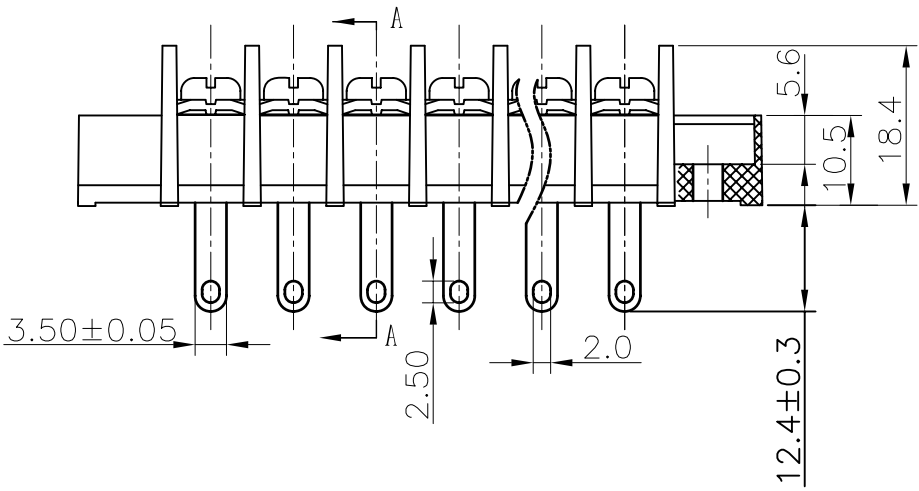
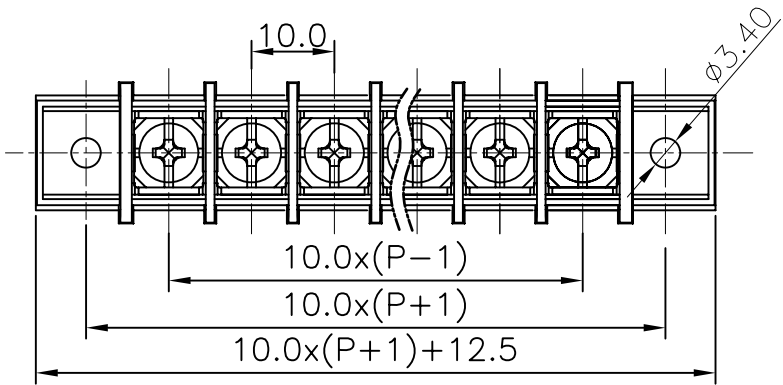


- Notes:
- 1. Pitch:10mm ,Poles:2-24P
 - 2. Rated current:20A
 - 3. Rated voltage:300V
 - 4. Operation temperatures:-40° C~+105° C
 - 5. Insulation Withstand Voltage:AC2000V/1Min
 - 6. Insulation Resistance:500MΩ/DC500V
 - 7. Wire Range:22~12AWG
 - 8. Max. Torque Value:12. 24kgf.cm
 - 9. Undimensioned Tolerances:

Pitch range in mm				Nominal dimension range in mm				
to 6	over 6 to 10	over 10 to 24	to 6	over 6 to 30	over 30 to 90	over 90 to 200	over 200 to 480	
±0.10	±0.15	±0.25	±0.1	±0.2	±0.3	±0.5	±0.7	0.05/10

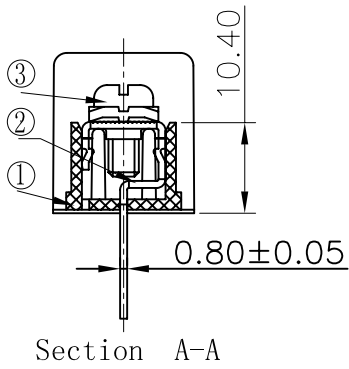

3	4*8 (7.5*7.5) bright Screw	S000000570 (H)	XX	Steel	Ni Plated
2	DG45H Pin header	5003B00040 (H)	XX	Brass	SnCe Plated

1	DG55H-A Housing	5004M0YXXA (H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES
DETACHED LISTS	MM (INCH)	DFTO Home	DATE 12/09/05*	DEGSON® 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD	
	TOLERANCES EXCEPT AS NOTED	CHKD	DATE		
		MFO	DATE		
		APPVL	DATE		
	MM .0 ± .00 ± .000 ±	MATERIAL :		NAME	
	ANGLES ± 1°	G.E :		DG55H-A-XXP-1Y-00A(H)	
THIRD ANGLE PROJECTION		FINISH :		DRAWING NO. DG55H-E04	
		SCALE : 1:1		DO NOT SCALE DRAWING	
				SHEET 1 OF 1	