
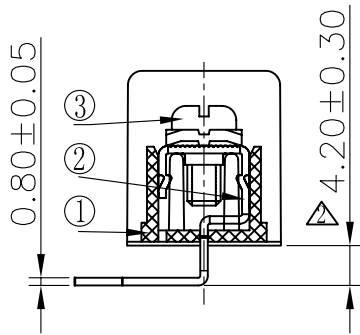
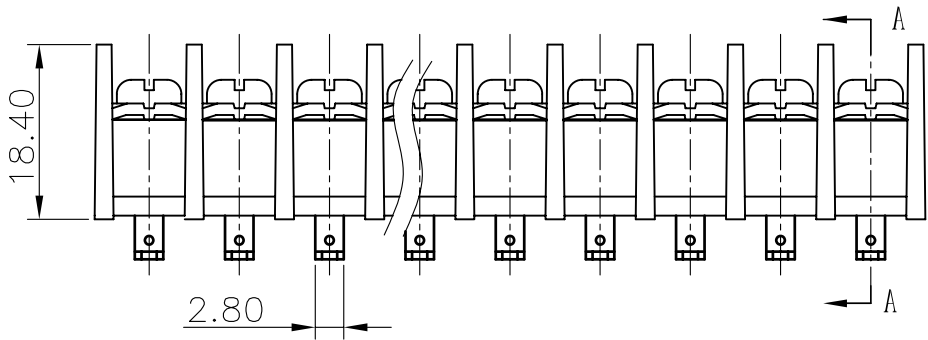


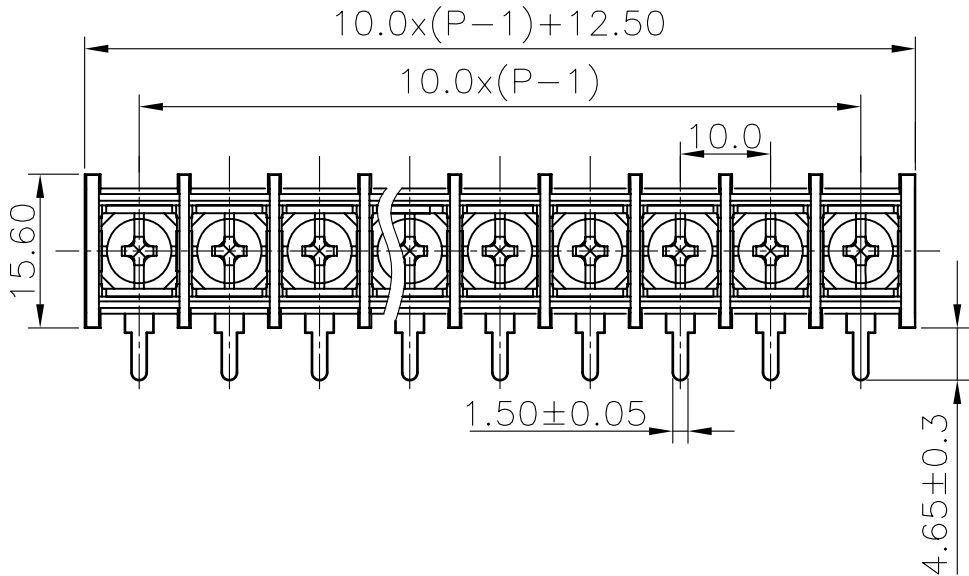


Section A-A

REVISION RECORD					
REV	ECO	DESCRIPTION	DRFT	DATE	
1		出脚尺寸由5.00±0.2变更到4.65±0.3	CSX	06/16/05	
2		将引脚和高度尺寸公差都改为±0.3	wyh	09/10/05	
3		图面更新	HW	06/12/06	
4		增加UL刻字	YeJ	01/30/07	
5		品名、料号增加环保标识“(H)”	YeJ	12/08/07	


Notes:

- 1.Pitch:10.0mm Pole:2-26P
- 2.Rated current:20A
- 3.Rated voltage:300V
- 4.Operation temperatures:-40℃~+105℃
- 5.Withstanding Voltage:AC2000V/1Min
6. Insulation Resistance:500MΩ /DC500V
- 7.Wire Range:22~12AWG
- 8.Max.Torque Value: 12.24kgf.cm.
- 9.Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm				
	over 6 to 10	over 10 to 24	over 30 to 60	over 60 to 100	over 100 to 150	over 150	
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0



3	4*8 bright Screw	S000000570 (H)	XX	Steel	Ni Plated
2	DG45R Pin header	5003B00060 (H)	XX	Brass	SnCe Plated

1	DG55R-B Housing	5004A0YXXA (H)	1	PA66	UL94V-0	
ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES	
DETACHED LISTS	← MM (INCH) →		DFTO WSJ	DATE 11/03/03"		
	TOLERANCES EXCEPT AS NOTED		CHKD	DATE		
			MFO	DATE		
			APPVL	DATE		
			MATERIAL :			
	ANGLES ± 1°		G.E :			
			FINISH :		DRAWING NO. DG55R-E01	
THIRD ANGLE PROJECTION		SCALE : 1:1		/PART NO.		
			DO NOT SCALE DRAWING		SHEET 1 OF 1	
 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD NAME DG55R-B-XXP-1Y-00A(H)						
SIZE A3 REV T5 12/08/07						

