


REVISION RECORD				
REV	ECD	DESCRIPTION	DRFT	DATE
△		去掉UL中的小“R”字	WLM	07/15/08

RoHS

Notes:

1. Pitch:5.0mm , Poles:2-XXP
2. Rated voltage/current:UL 300V/10A
IEC 250V/17.5A
3. Operation temperatures:-30℃~+120℃
4. Withstanding Voltage:AC2000V/1min
5. Insulation Resistance:5000MΩ/DC1000V
6. Wire Range:28~16AWG, 1.5mm²
7. Max. Torque Value:M2.5, 4.08kgf.cm
8. Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm					
to	over	over	to	over	over	over	over	
6	6 to 10	10 to 24	30	30 to 60	60 to 100	100 to 150	150	∅
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

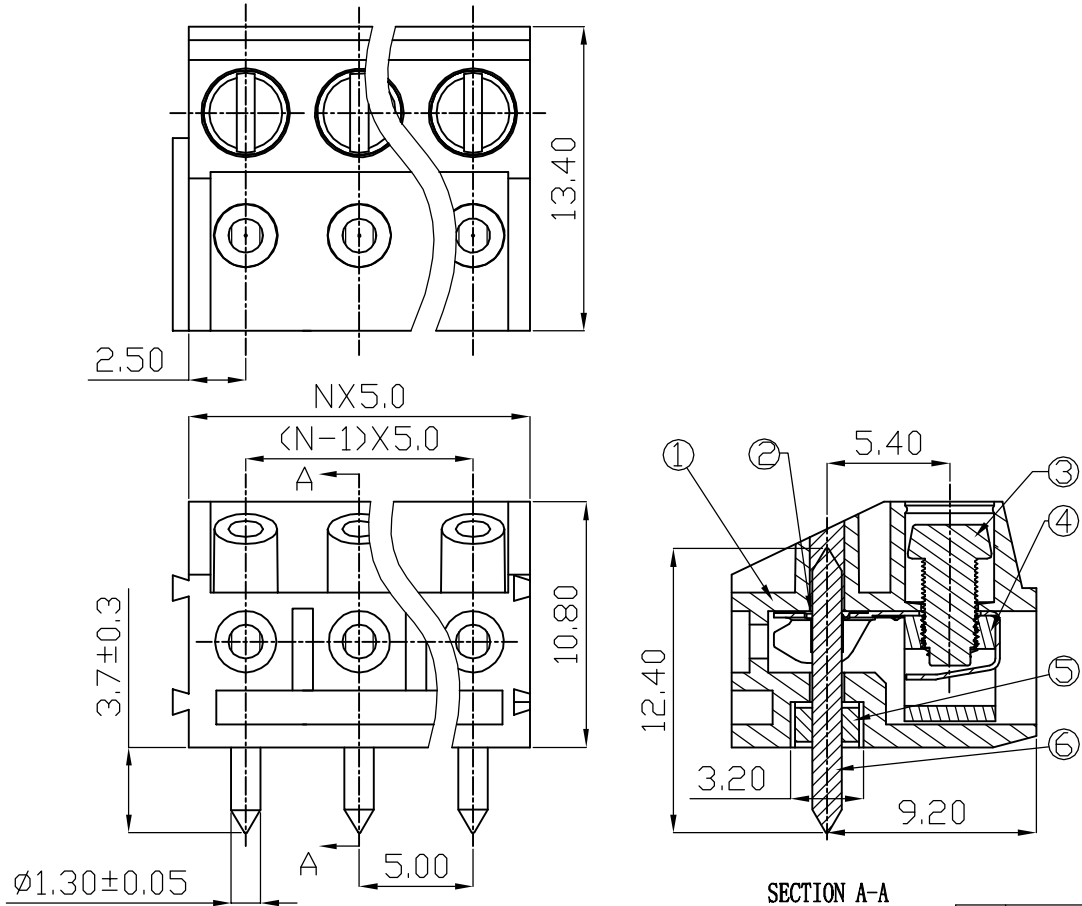

6	DG332-Pin header	4014B00010(H)	XX	Brass	SnCe
5	DG332J-5.0-Housing	4014A03XXA(H)	1	PA66+10%GF	UL94V-0
4	DG332-Cage	X000000280(H)	XX	Brass	Ni plated
3	DG332-Screws	S000001390(H)	XX	Steel	Cr ³⁺ Zn
2	DG332-Spring	X000000270(H)	XX	Phosphor bronze	Ni plated
1	DG332K-5.0 Housing	4013A02XXB(H)	1	PBT	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
TOLERANCES EXCEPT AS NOTED		DATE 03/26/08	DEGSON® 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD NAME DG332KJ-5.0-XXP-1Y-00A(H) DRAWING NO. DG332KJ-E01 SIZE A3 REV T1 07/15/08		
MM	±	CHKD			
.00 ±	±	DATE			
.000 ±	±	APPVL			
ANGLES ± 1°	G.E :	DATE	DO NOT SCALE DRAWING		
THIRD ANGLE PROJECTION	FINISH:	MATERIAL :			
SCALE : 1 : 1		SHEET 1		OF 1	