


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
△		Drawing Revise	Haoyh	03/16/06
△		修改刻字	CSX	05/08/06
△		修改出脚尺寸	CSX	07/03/07
△		品名、料号增加环保标示“(H)”	CSX	12/10/07

- Notes:
- 1.Pitch:10.0mm
 - 2.Rated volatge/current:UL 300V/10A
VDE 250V/24A
 - 3.Operation temperatures:-30℃~+120℃
 - 4.Withstanding Voltage:AC2000V/1min
 - 5. Insulation Resistance:5000MΩ/DC1000V
 - 6.Wire Range:22~14AWG, 2.5mm²
 - 7.Max. Torque Value:5.10kgf.cm
 - 8.Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm					—
to	over	over	to	over	over	over	over	—
6	6 to 10	10 to 24	30	30 to 60	60 to 100	100 to 150	150	∩
								◇
	±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0

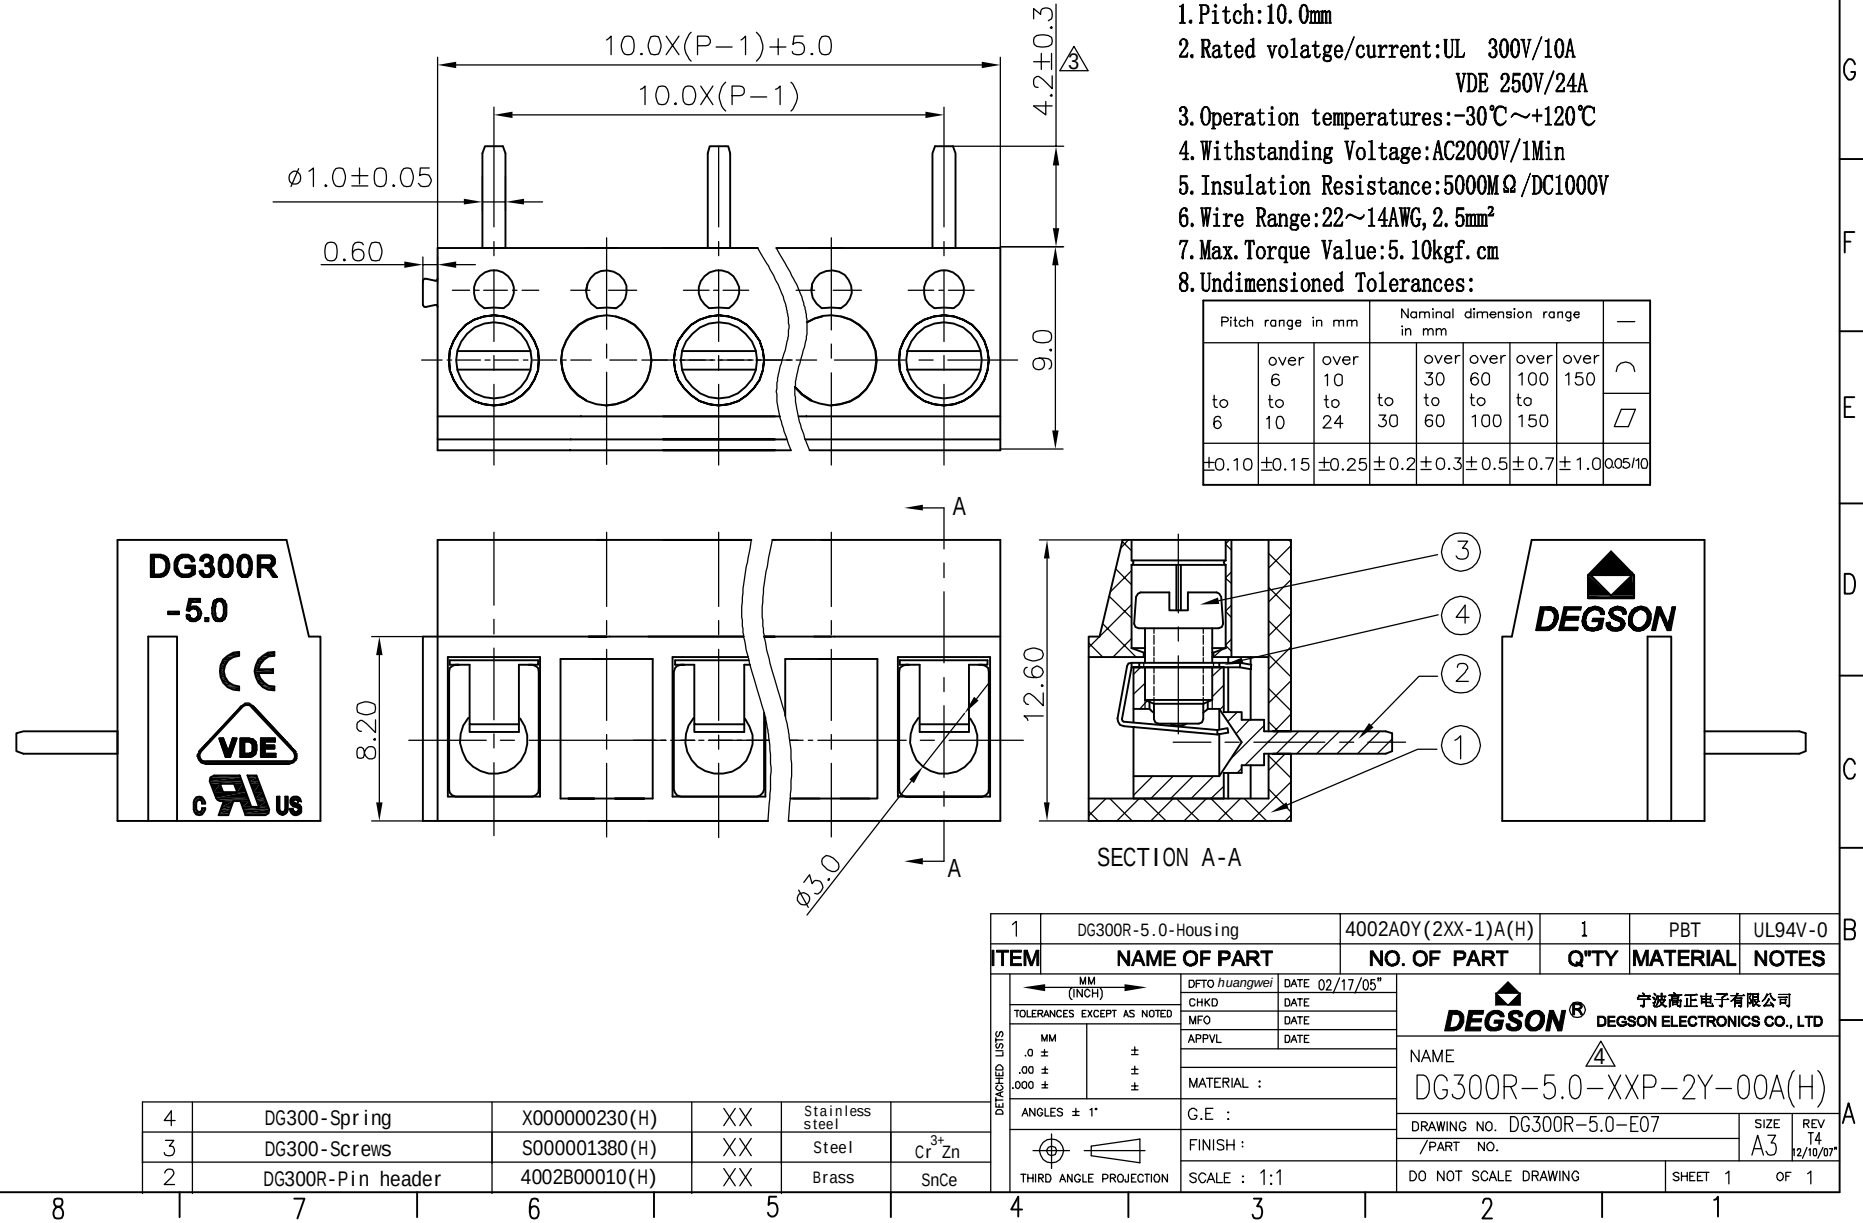

4	DG300-Spring	X000000230(H)	XX	Stainless steel	
3	DG300-Screws	S000001380(H)	XX	Steel	Cr ³⁺ Zn
2	DG300R-Pin header	4002B00010(H)	XX	Brass	SnCe

1	DG300R-5.0-Housing	4002A0Y(2XX-1)A(H)	1	PBT	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DEGSON® 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD					
NAME DG300R-5.0-XXP-2Y-00A(H)					
DRAWING NO. DG300R-5.0-E07					
/PART NO.					
DO NOT SCALE DRAWING					
SHEET 1 OF 1					