



REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
1		Drawing Revise	Haoyh	03/16/06
2		增加VDE刻字	Yej	11/29/07*
3		更改公差表	LJH	12/24/07*

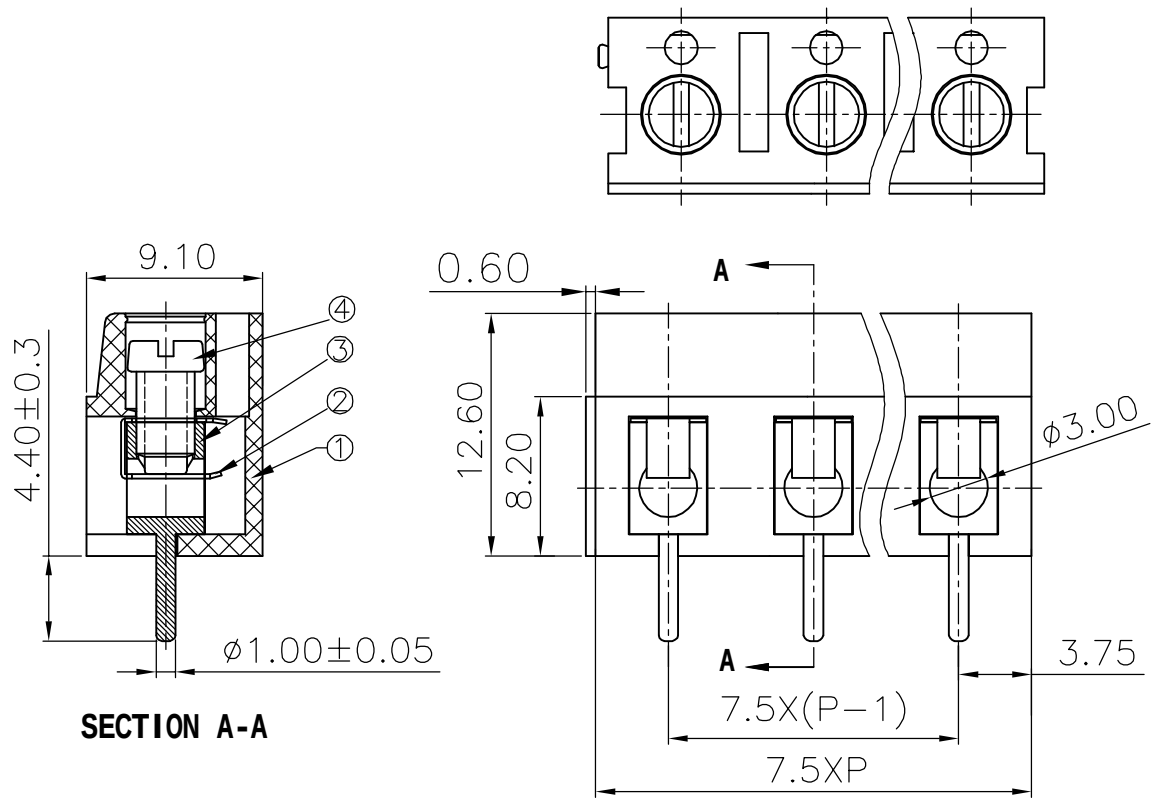

- Notes:
1. Pitch: 7.5mm
 2. Rated voltage/current: UL 300V/10A
VDE 250V/24A
 3. Operation temperatures: -30°C ~ +120°C
 4. Withstanding Voltage: AC2000V/1min
 5. Insulation Resistance: 5000MΩ / DC1000V
 6. Wire Range: 22~14AWG, 2.5mm²
 7. Max. Torque Value: 5.10kgf.cm
 8. Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm					
to	over	to	to	over	over	over	over	
6	6	10	30	30	60	100	150	⌒
6	10	24	30	60	100	150		▱
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

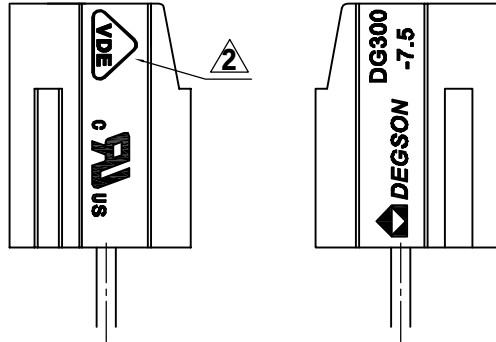

4	DG300 Screws	S000001380(H)	XX	Steel	Cr ³⁺ Zn
3	DG300(A) Pin header	4001B00010(H)	XX	Brass	SnCe
2	DG300 Spring	X000000230(H)	XX	Stainless steel	
1	DG300-7.5-Housing	4001A0YXXA(H)	1	PBT	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES
MM (INCH) TOLERANCES EXCEPT AS NOTED MM .0 ± .00 ± .000 ± ANGLES ± 1° THIRD ANGLE PROJECTION DFTD Zhuwm DATE 03/26/04 CHKD DATE MFO DATE APPVL DATE MATERIAL : G.E: FINISH : SCALE : 1:1 DEGSON® 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD NAME DG300-7.5-XXP-1Y-00A(H) DRAWING NO. DG300-7.5-E02 /PART NO. DO NOT SCALE DRAWING SHEET 1 OF 1					