


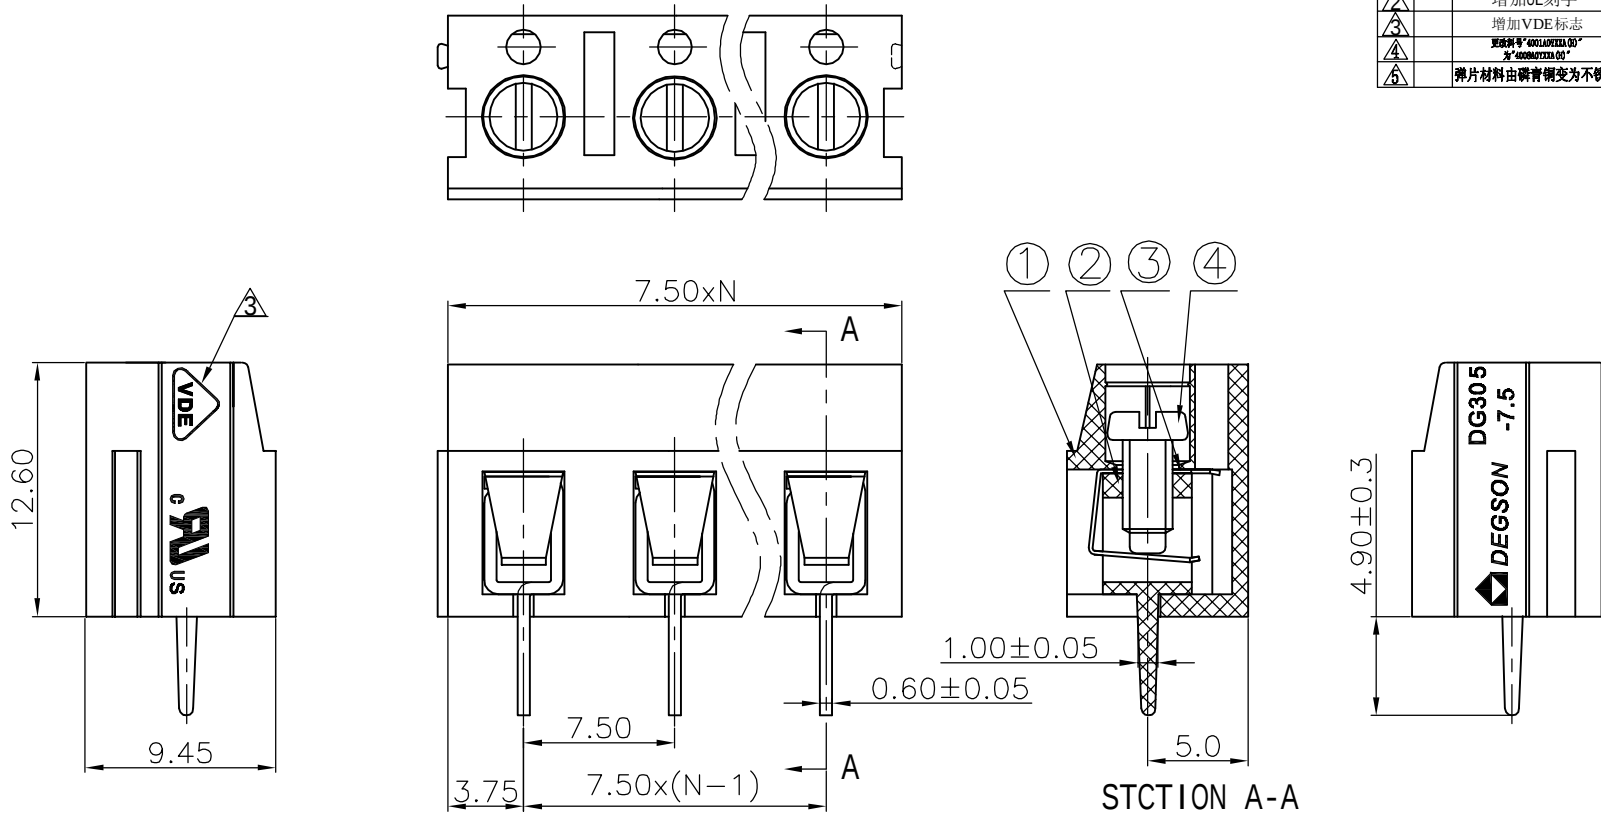

- Notes:
- 1. Pitch:7.5mm , Poles:2-XXP
 - 2. Rated voltage/current:UL 300V/15A
VDE 250V/20A
 - 3. Operation temperatures:-30℃~+120℃
 - 4. Withstanding Voltage:AC2000V/1Min
 - 5. Insulation Resistance:5000MΩ/DC1000V
 - 6. Wire Range:12~18AWG, 2.5mm²
 - 7. Max. Torque Value:M2.5, 4.08kgf.cm
 - 8. Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm						
	over 6 to 10	over 10 to 24	over 24 to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150 to 200	
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
1		Drawing Revise	Haoyh	03/28/06
2		增加UL刻字	CSX	06/18/07
3		增加VDE标志	LJH	12/24/07
4		增加VDE标志	LJH	07/03/08
5		弹片材料由磷青铜变为不锈钢	YHG	07/07/09

4	DG305-Screws	S000001620 (H)	XX	Steel	Cr ³⁺ Zn
3	DG305-Spring	X000000260 (H)	XX	Stainless steel	
2	DG305-Pin header	4003B00010 (H)	XX	Brass	SnCe
1	DG305-7.5-Housing	4008A0YXXA (H)	1	PBT	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DETACHED LISTS		DFTO Haoyh DATE 02/01/05			
TOLERANCES EXCEPT AS NOTED		CHKD DATE	DEGSON® 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD		
MFO DATE		DATE			
APVVL DATE		DATE			
MATERIAL :		DATE			
ANGLES ± 1°		G.E :	NAME DG305-7.5-XXP-1Y-00A(H)		
THIRD ANGLE PROJECTION		FINISH :	DRAWING NO. DG305-7.5-E02		
SCALE : 1:1		DO NOT SCALE DRAWING	SHEET 1 OF 1		