

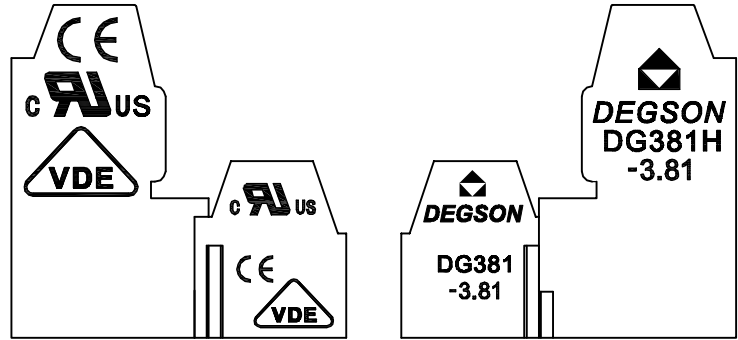
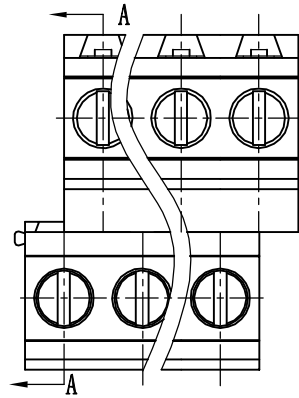


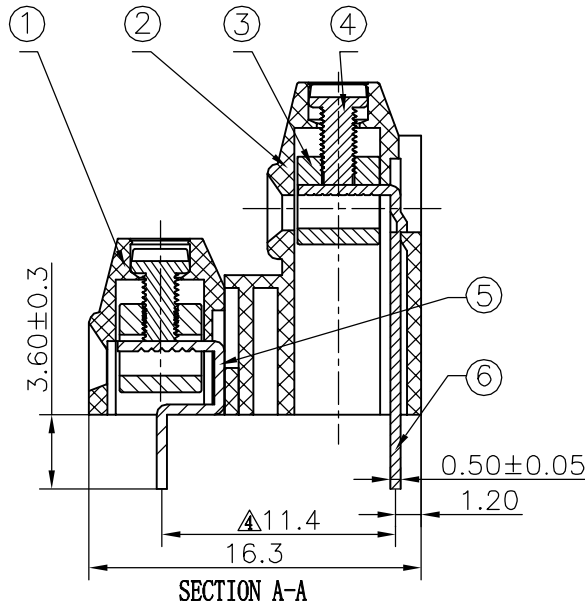


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
△1		Drawing Revise	Haoyh	03/08/06
△2		增加RoHs标示	CSX	12/19/07
△3		修改线数: 改为每个焊脚代表一线	LJH	03/22/08
△4	09-0129	与实物相符	Wupeng	11/14/09

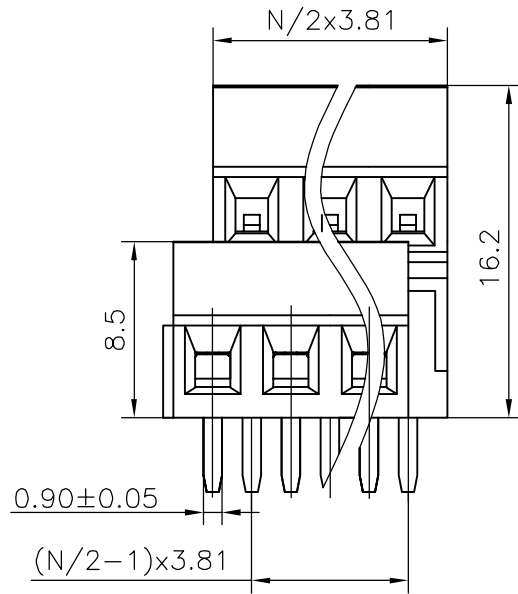

- Notes:
- Pitch: 3.81mm , Ploes: XXP
 - Rated volatge/current: UL 300V/10A
VDE 130V/10A
 - Operation temperatures: -40° C~+105° C
 - With standing voltage: AC2000V/1Min
 - Insulation resistance: 5000MQ/DC1000V
 - Wire range: 26~16AWG, 1.5mm²
 - Max.Torque Value: M2, 2.04kgf.cm
 - Undimensioned Tolerances:

Pitch range in mm			Naminal dimension range in mm					—
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	∩ ◇
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

6	DG381H Pin header	4033B00010 (H)	△3	XX/2	phosphor bronze	SnCe
5	DG381 Pin header	4047B00010 (H)	△3	XX/2	phosphor bronze	SnCe
4	DG381 Screws	S000001440 (H)	△3	XX	Steel	Cr ³⁺ Zn
3	DG381 Cage	X000000300 (H)	△3	XX	Brass	Ni plated
2	DG381H-3.81-Housing	4033A0Y (XX/2) A (H)	△3	1	PA66	UL94V-0

1	DG381-3.81-Housing	△3	4047A0Y (XX/2) A (H)	1	PA66	UL94V-0
ITEM	NAME OF PART		NO. OF PART	Q'TY	MATERIAL	NOTES
DETACHED LISTS	← MM (INCH) →		DFTO Wupeng	DATE 11/14/09	 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD	
	TOLERANCES EXCEPT AS NOTED		CHKD	DATE		
			MFO	DATE		
			APPVL	DATE		
	MM		MATERIAL :		NAME	
	.0 ±	±			△2	
	.00 ±	±			DG381B-3.81-XXP-1Y-00A(H)	
	.000 ±	±				
	ANGLES ± 1°		G.E :		DRAWING NO. DG381B-3.81-E01	
			FINISH :		/PART NO.	
THIRD ANGLE PROJECTION		SCALE : 1:1		DO NOT SCALE DRAWING		
				SHEET 1	OF 1	