
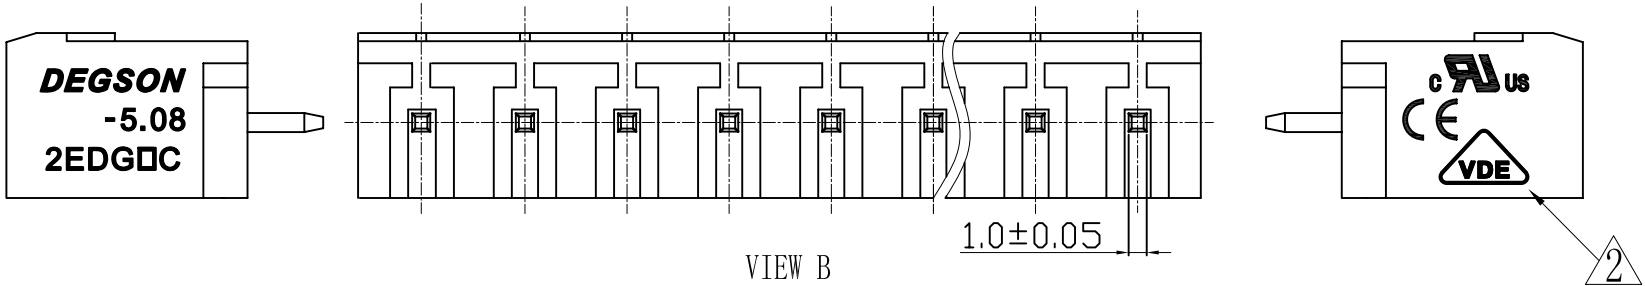



REVISION RECORD				
REV	ECD	DESCRIPTION	DRFT	DATE
△		图面更新	CSX	05/06/06
△		增加VDE、CE刻字	Ye j	02/28/08
△		增加自动化方针	WLM	09/23/08
△	10-0329	增加标注尺寸	COCO	10/09/10

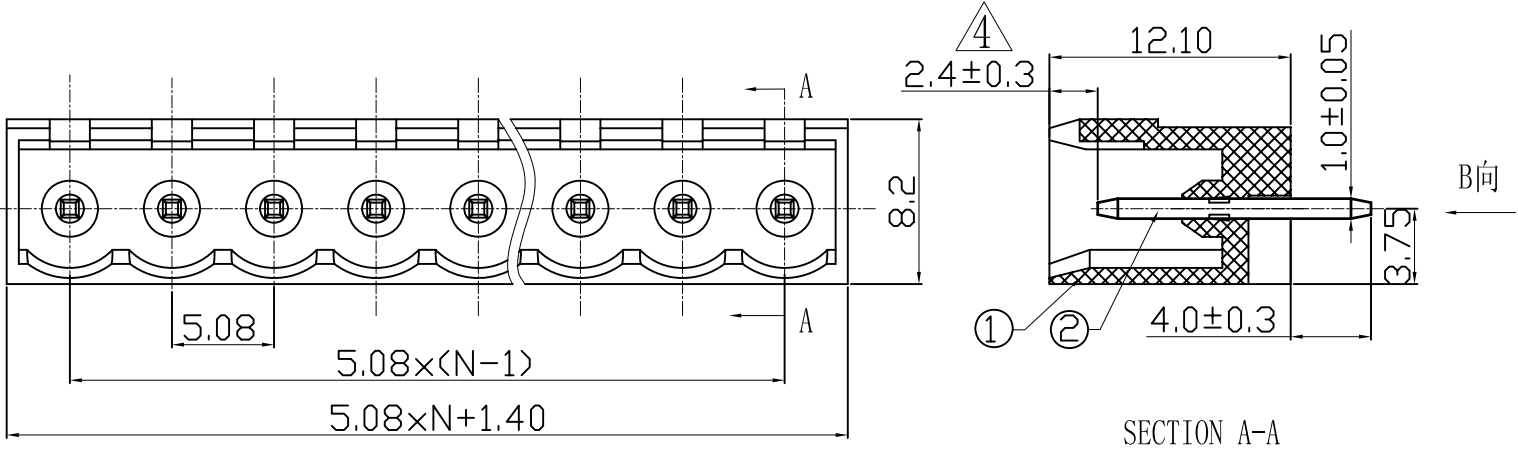

Notes:

1. Pitch:5.08mm, Poles:2-24P
2. Rated voltage/current:UL 300V/15A
VDE 320V/20A
3. Operation temperatures:-40° C~+105° C
4. Withstanding voltage:AC2000V/1Min
5. Insulation resistance:5000MΩ/DC1000V
6. Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm					
	over 6 to 10	over 10 to 24	over 30 to 60	over 60 to 100	over 100 to 150	over 150 to 200	over 200 to 250	
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

2	2EDGV-Pin header	△ 1007B00010 (H)	XX	Brass	Automatic assembly	
2	2EDGV-Pin header	1007B00030 (H)	XX	Brass	Manual assembly	
1	2EDGVC-5.08 Housing	1009A0YXXA (H)	1	PA66	UL94V-0	
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES	
DETACHED LISTS	← MM (INCH) →		DFTD HW	DATE 08/23/05'		
	TOLERANCES EXCEPT AS NOTED		CHKD	DATE		
			MFD	DATE		
			APPVL	DATE		
			NAME			
			2EDGVC-5.08-XXP-1Y-00A(H)			
	ANGLES ± 1°		G.E :		DRAWING NO. 2EDGVC-5.08-E06	
			FINISH:		SIZE A3	
			SCALE :		REV T4 10/09/10'	
THIRD ANGLE PROJECTION			DO NOT SCALE DRAWING		SHEET 1 OF 1	