

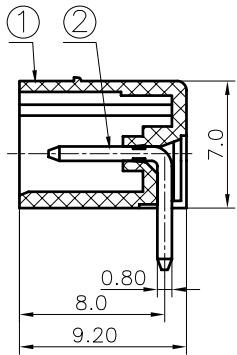


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
1		去掉UL中的小“R”字	CSX	09/17/07
2		更新图面	LJH	03/01/08
3		老模新开更改刻字	WLM	07/12/08
4		增加自动化方针	WLM	10/31/08
5		增加VDE, CE刻字及修改刻字	Zengy	12/26/08
6		工程变更2-6P取消卡槽	XGF	04/11/09

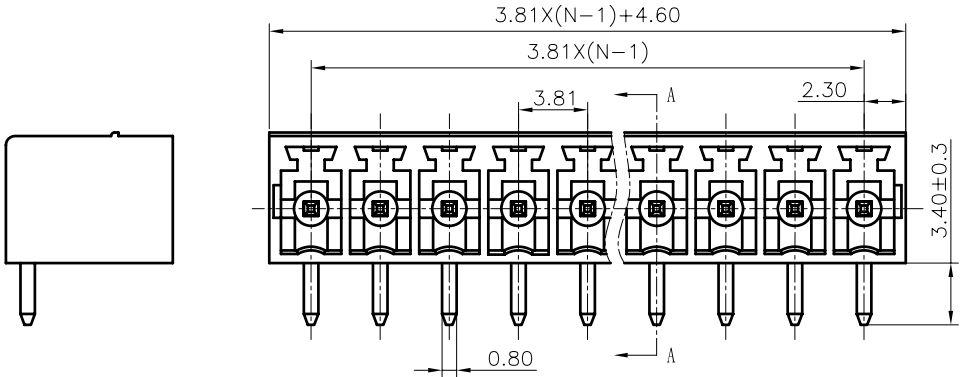


SECTION A-A

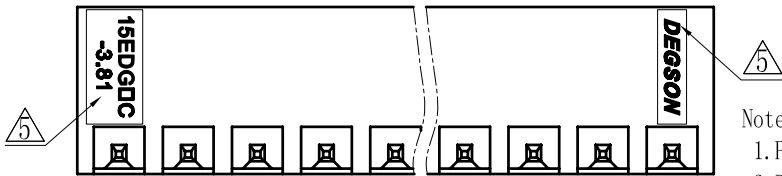

Notes:

1. Pitch: 3.81mm, Poles: 2-24P
2. Rated voltage/current: UL 300V/8A
VDE 250V/7A
3. Operation temperatures: -40°C ~ +105°C
4. Withstanding Voltage: AC2000V/1Min
5. Insulation Resistance: 5000MΩ/DC1000V
6. Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm					
to 6	over 6 to 10	over 10 to 24	over 30 to 60	over 60 to 100	over 100 to 150	over 150	—
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0 0.05/10

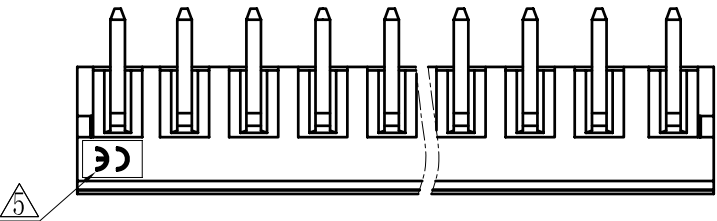

2	15EDGRC-Pin header	1003B00040 (H)	XX	Brass	Automatic assembly
2	15EDGRC-Pin header	1003B00010 (H)	XX	Brass	Manual assembly

1	15EDGRC-3.81-Housing	1003A0VXXA (H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES
DETACHED LISTS		DFTO LIN CHKD MFO APPVL	DATE 05/19/06*	NAME 15EDGRC-3.81-XXP-1Y-00A(H)	
TOLERANCES EXCEPT AS NOTED		MATERIAL :		DRAWING NO. 15EDGRC-3.81-E02	
ANGLES ± 1°		G.E :		/PART NO.	
THIRD ANGLE PROJECTION		FINISH :		DO NOT SCALE DRAWING	
		SCALE : 1:1		SHEET 1 OF 1	

DEGSN® 宁波高正电子有限公司
DEGSN ELECTRONICS CO., LTD

SIZE A3
REV T6
04/11/09