


REVISION RECORD				
REV	ECD	DESCRIPTION	DRFT	DATE
2		增加UL刻字	Ye j	10/16/06
3		更新图面	LJH	03/01/08
4		老模新开更改刻字	WLM	07/14/08
5		增加自动化方针	WLM	10/29/08
6		增加M6, C刻字及修改刻字, 2中取消卡槽	Zengy	04/11/09

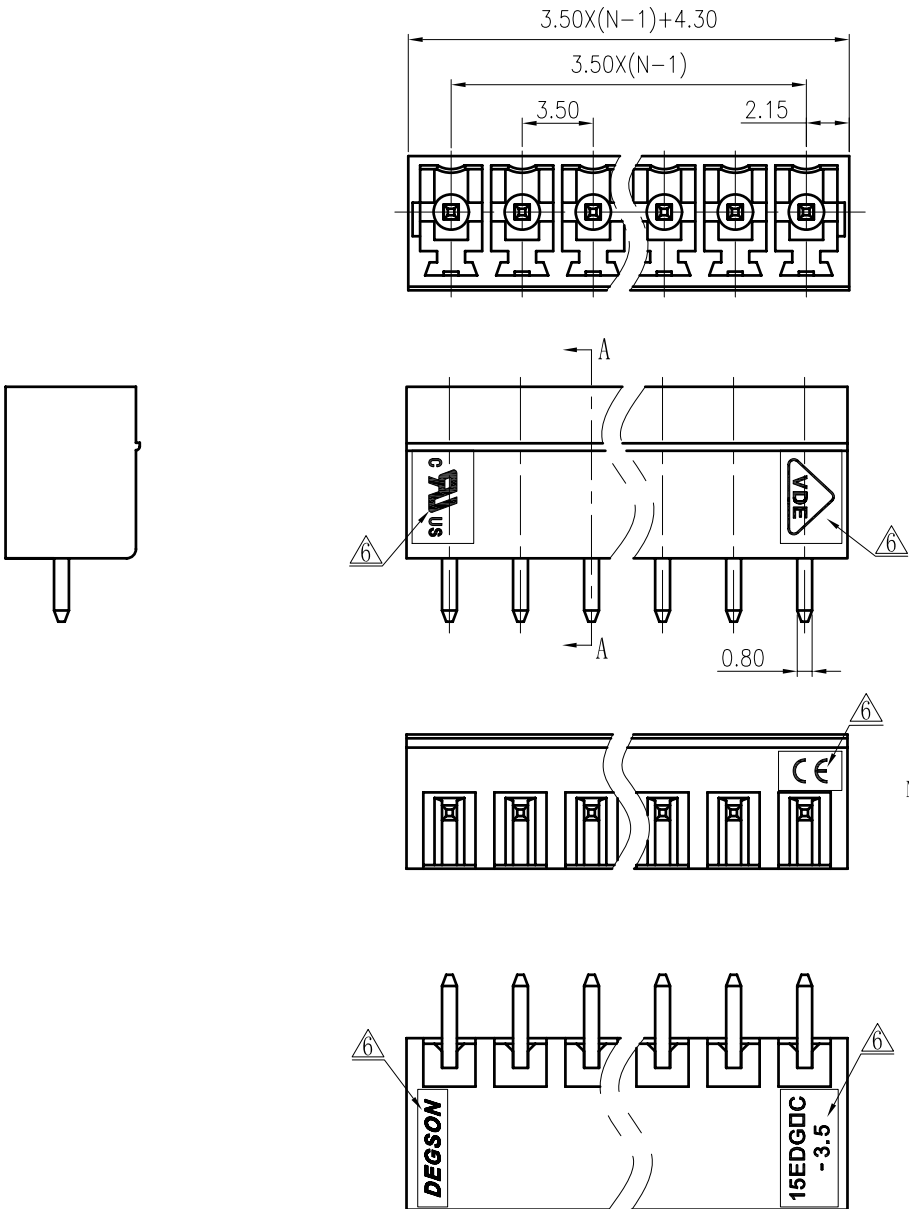

- Notes:
1. Pitch: 3.5mm, Poles: 2-24P
 2. Rated voltage/current: UL 300V/8A
VDE 250V/7A
 3. Operation temperatures: -40℃~+105℃
 4. Withstanding Voltage: AC2000V/1Min
 5. Insulation Resistance: 5000MΩ/DC1000V
 6. Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm					
	over 6 to 10	over 10 to 24	over 30 to 60	over 60 to 100	over 100 to 150	over 150	—
to 6							⌒
							▭
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0

2	15EDGVC-Pin header	1002B00060 (H)	XX	Brass	Automatic assembly
2	15EDGVC-Pin header	1002B00010 (H)	XX	Brass	Manual assembly

1	15EDGVC-3.5-Housing	1002A0YXXA (H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES
TOLERANCES EXCEPT AS NOTED		DFTD Home	DATE 12/09/05	DEGSON 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD	
MM (INCH)		CHKD	DATE		
TOLERANCES EXCEPT AS NOTED		MFD	DATE		
TOLERANCES EXCEPT AS NOTED		APPVL	DATE		
MM		MATERIAL :		NAME	
.0 ±	±	G.E :		15EDGVC-3.5-XXP-1Y-00A(H)	
.00 ±	±	FINISH:		DRAWING NO. 15EDGVC-3.5-E02	
.000 ±	±	THIRD ANGLE PROJECTION		/PART NO.	
ANGLES ± 1°		SCALE : 1:1		DO NOT SCALE DRAWING	
				SHEET 1 OF 1	