


REVISION RECORD					
REV	ECO	DESCRIPTION	DRFT	DATE	
△		工程变更	CSX	11/30/06	
△		增加UL刻字	CSX	03/12/07	
△		增加VDE、CE刻字	WLM	02/11/09	

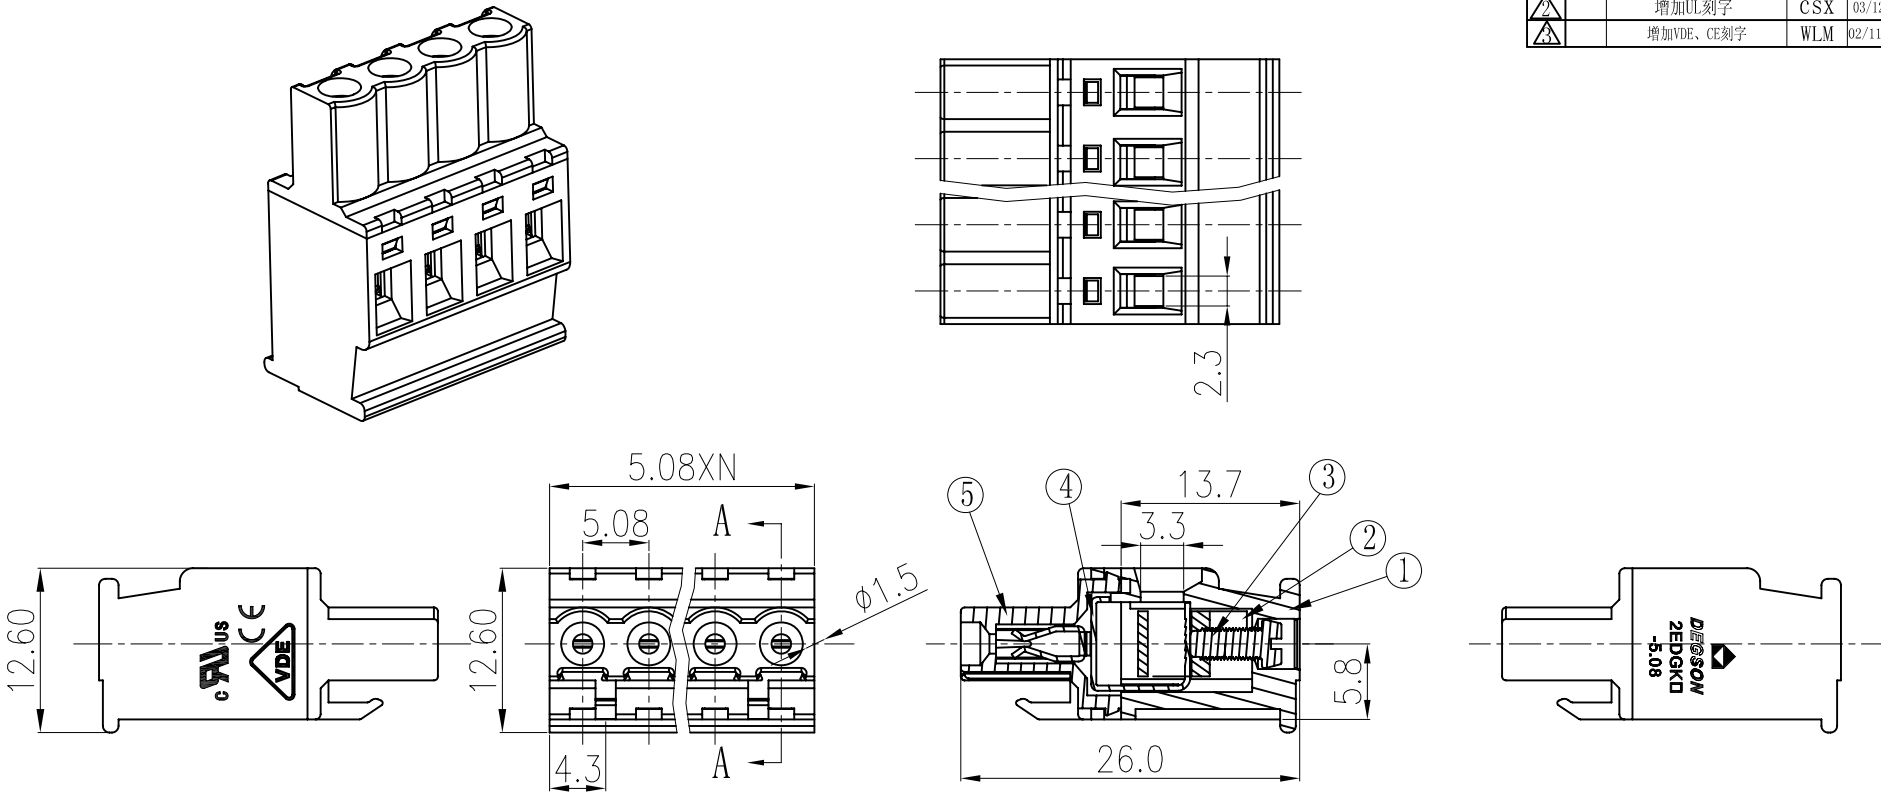


Notes:

1. Pitch:5.08mm ,Poles:2-24P
2. Rated voltage/current:UL 300V/15A
VDE 320V/10A
3. Operation temperatures:-45℃~+105℃
4. Withstanding Voltage:AC2000V/1min
5. Insulation Resistance:5000Ω/DC1000V
6. Wire Range:28~12AWG, 2.5mm²
7. Max. Torque Value:M2.5, 4.08kgf.cm
8. Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm						—
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150		
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10	

5	2EDGKA/B-5.08 COVER	1028C0YXXA(H)	1	PA66	UL94V-0
4	2EDGKA/B-CLAMP	1028B00010(H)	XX	Phospor Bronze	Ni plated
3	2EDG SCREW-M2.5	S000000980(H)△	XX	STEEL	Cr ³⁺ Zn
2	DG128 CAGE	X000000020(H)	XX	BRASS	Ni plated

1	2EDGKA/B-5.08 HOUSING	1028A0YXXA(H)	1	PA66	UL94V-0		
ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES		
DETACHED LISTS	← MM (INCH) →		DFTO LIN	DATE 05/19/06"		DEGSON ® 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD NAME 2EDGKB-5.08-XXP-1Y-00A(H) DRAWING NO. 2EDGKB-5.08-E02 SIZE A3 REV T3 02/11/09" DO NOT SCALE DRAWING SHEET 1 OF 1	
	TOLERANCES EXCEPT AS NOTED		CHKD	DATE			
	MM		MFO	DATE			
	.0 ±		APPVL	DATE			
	.00 ±						
	.000 ±		MATERIAL :				
	ANGLES ± 1°		G.E :				
			FINISH :				
	THIRD ANGLE PROJECTION		SCALE :				