


REVISION RECORD				
REV	ECD	DESCRIPTION	DRFT	DATE
△		Drawing revise	Haoyh	03/17/06
△		增加VDE标志	LJH	12/25/07

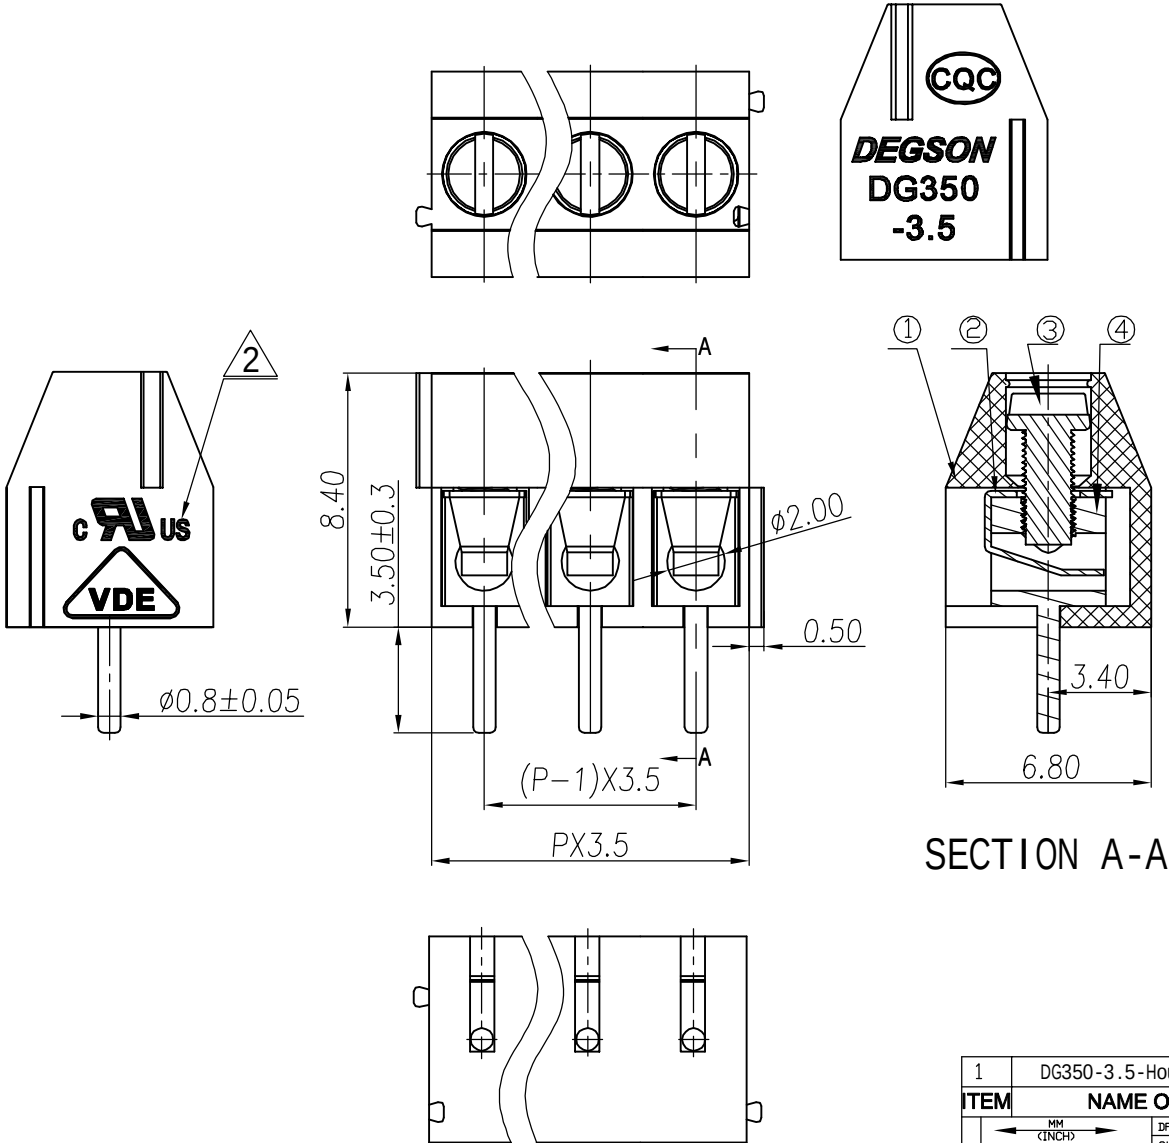

- Notes:
- 1.Pitch:3.5mm
 - 2.Rated voltage/current:UL 300V/10A
VDE 130V/10A
 - 3.Operation temperatures:-40℃~+105℃
 - 4.Withstanding Voltage:AC1500V/1min
 - 5.Insulation Resistance:5000MΩ /DC1000V
 - 6.Wire Range:24-18AWG,1.0mm²
 - 7.Max.Torque Value:2.04kgf.cm
 - 8.Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm					—
		over 6 to 10	over 10 to 24	over 30 to 60	over 60 to 100	over 100 to 150	
to 6	to 10	to 24	to 30	to 60	to 100	to 150	∩
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0

SECTION A-A

4	DG350(A)Pin header	4017B00010(H)	XX	Brass	SnCe
3	DG350 M2"——Screws	S000001400(H)	XX	Steel	Cr ³⁺ Zn
2	DG350 Spring	X000000290 (H)	XX	Phosphor bronze	Ni plated

1	DG350-3.5-Housing	4017A0YXXA(H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DEGSON® 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD					
NAME DG350-3.5-XXP-1Y-00A(H)					
DRAWING NO. DG350-3.5-E01					
/PART NO.					
DO NOT SCALE DRAWING					
SHEET 1 OF 1					