
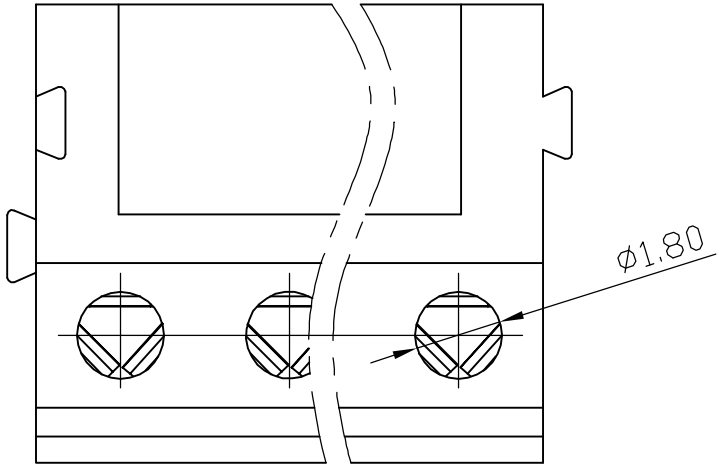
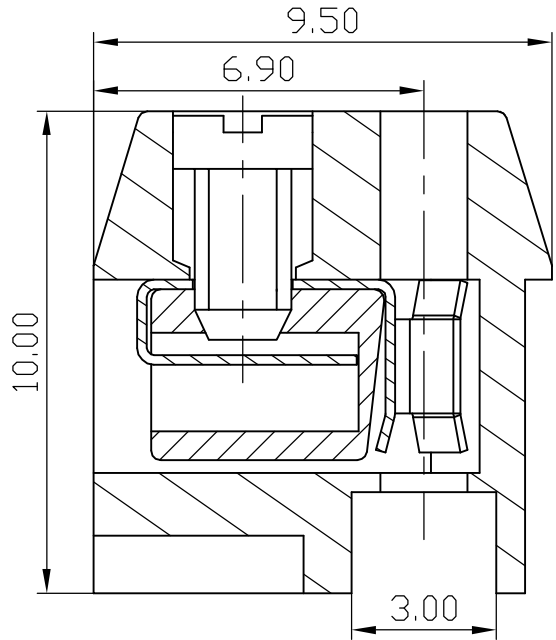


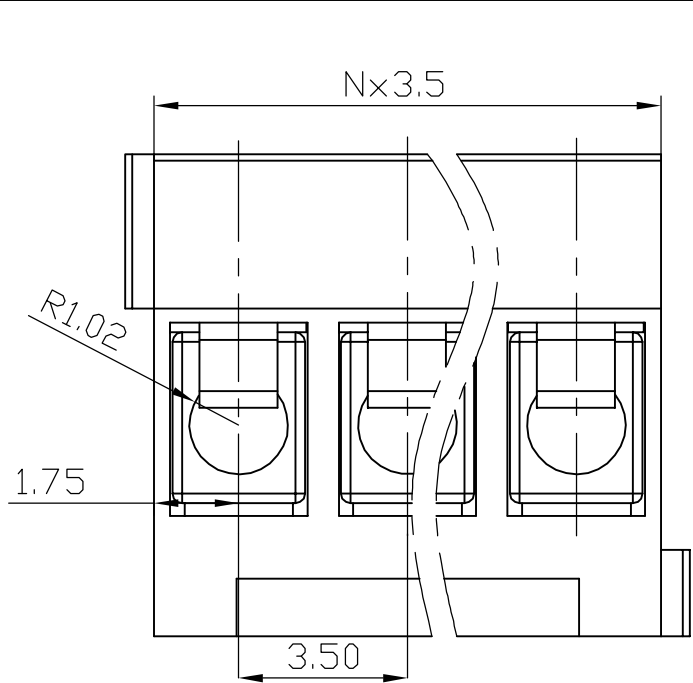


- Notes:
- 1. Pitch:3.5mm
 - 2. Rated current:10A
 - 3. Rated voltage:300V
 - 4. Operation temperatures:-30℃~+120℃
 - 5. Withstanding Voltage:AC2000V/1Min
 - 6. Insulation Resistance:5000MΩ/DC1000V
 - 7. Wire Range:28~16AWG, 1.5mm²
 - 8. Max. Torque Value:M2, 2.04kgf.cm
 - 9. Undimensioned Tolerances:

Pitch range in mm				Normal dimension range in mm				
to 6	over 6 to 10	over 10 to 24	to 6	over 6 to 30	over 30 to 90	over 90 to 200	over 200 to 480	—
±0.10	±0.15	±0.25	±0.1	±0.2	±0.3	±0.5	±0.7	0.05/10

REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
△		Drawing revise	Haoyh	04/27/06
△		修改螺丝料号	CSX	08/22/06

4	DG333K Brass cage	X000000680(H)	XX	Brass	Ni plated
3	DG333K Wire guard	X000000690(H)	XX	Phosphor bronze	Ni plated
2	DG333K Screws	S000001960(H)	XX	Steel	Cr ³⁺ Zn

DG333K-3.5-housing		4054A0YXXA(H)		1	PBT	UL94V-0		
ITEM	NAME OF PART		NO. OF PART		Q'TY	MATERIAL	NOTES	
DETACHED LISTS	← MM (INCH) →		DFTD L LUM	DATE 10/04/05''				
	TOLERANCES EXCEPT AS NOTED		CHKD	DATE				
			MFD	DATE				
			APPL	DATE				
	MM 0 ± .001 ± .000 ±				 DEGSON® 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD NAME DG333K-3.5-XXP-1Y-00A(H) DRAWING NO. DG333K-E02 /PART NO. DO NOT SCALE DRAWING			
	ANGLES ± 1°		G.E :					
			FINISH:					
			SCALE :					
	THIRD ANGLE PROJECTION				SHEET 1 OF 1			