
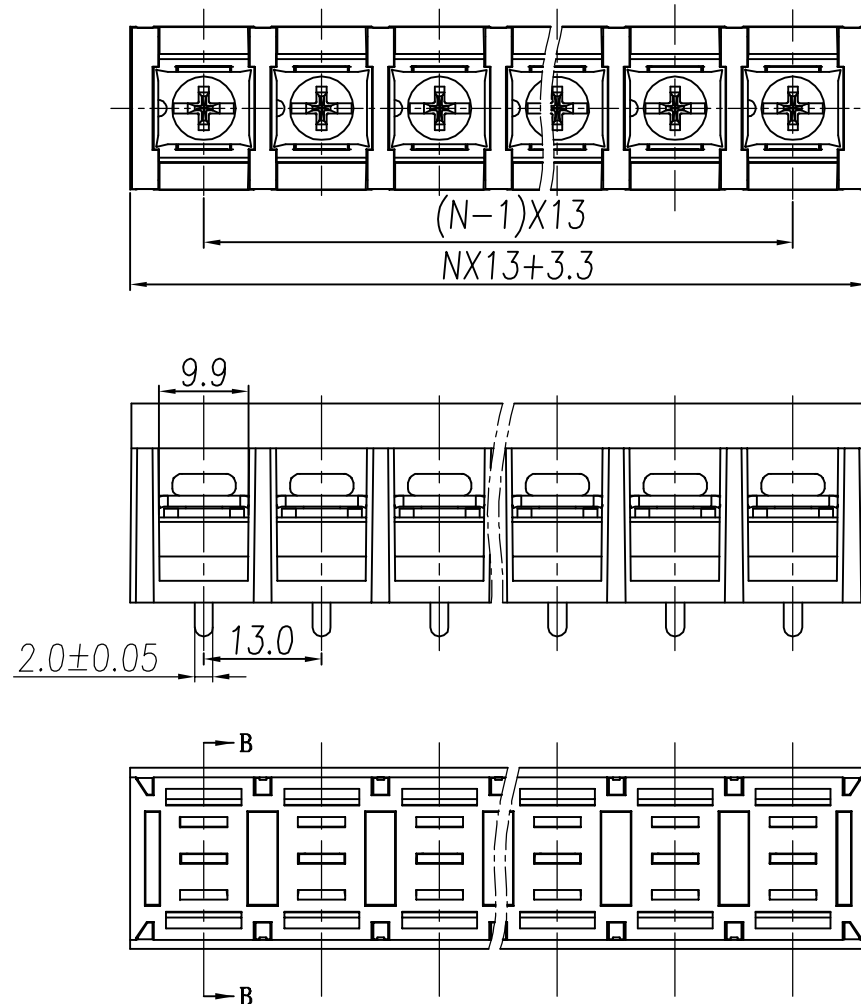



REVISION RECORD					
REV	ECO	DESCRIPTION	DRFT	DATE	
△		25%GF变更为23%GF	CSX	03/24/06	
△		增加UL刻字	CSX	04/17/06	
△		品名、料号增加环保标识“(H)”	YeJ	12/08/07	

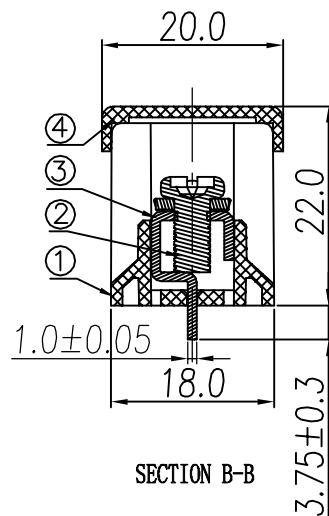

Notes:

1. Pitch: 13mm , Poles: 2-20P
2. Rated current: 40A
3. Rated voltage: 600V
4. Operation temperatures: -30° C ~ +120° C
5. Insulation Withstand Voltage: AC2000V/1Min
6. Insulation Resistance: 1000MΩ /DC500V
7. Wire Range: 18~10AWG
8. Max. Torque Value: 12. 24kgf. cm
9. Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm						
to	over	to	to	over	over	over	over		
6	6	10	30	30	60	100	150		∅
to	to	to	to	to	to	to	to		
6	10	24	30	60	100	150			
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10	



4	DG78-Cover	5034C07XXA (H)	1	PC	
3	DG78C Pin header	5009B00010 (H)	XX	Brass	SnCe plated
2	M4*8 (8*10) bright Screws	S000000510 (H)	XX	Steel	Ni plated

1	DG78 Housing	5034A0YXXA (H)	1	PA66+23%GF	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DETACHED LISTS	MM (INCH)	DFTO Zhuwm	DATE 01/13/06"	宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD	
	TOLERANCES EXCEPT AS NOTED	CHKD	DATE		
		MFO	DATE		
		APPVL	DATE		
	MM			NAME	
	.0 ±	±		DG78C-B-XXP-1Y-00A(H)	
	.00 ±	±		DRAWING NO. DG78C-E02	
	.000 ±	±		/PART NO.	
	ANGLES ± 1°	G.E :		SIZE REV	
	THIRD ANGLE PROJECTION	FINISH :		A3 T3	
		SCALE : 1:1		DO NOT SCALE DRAWING	
				SHEET 1 OF 1	