
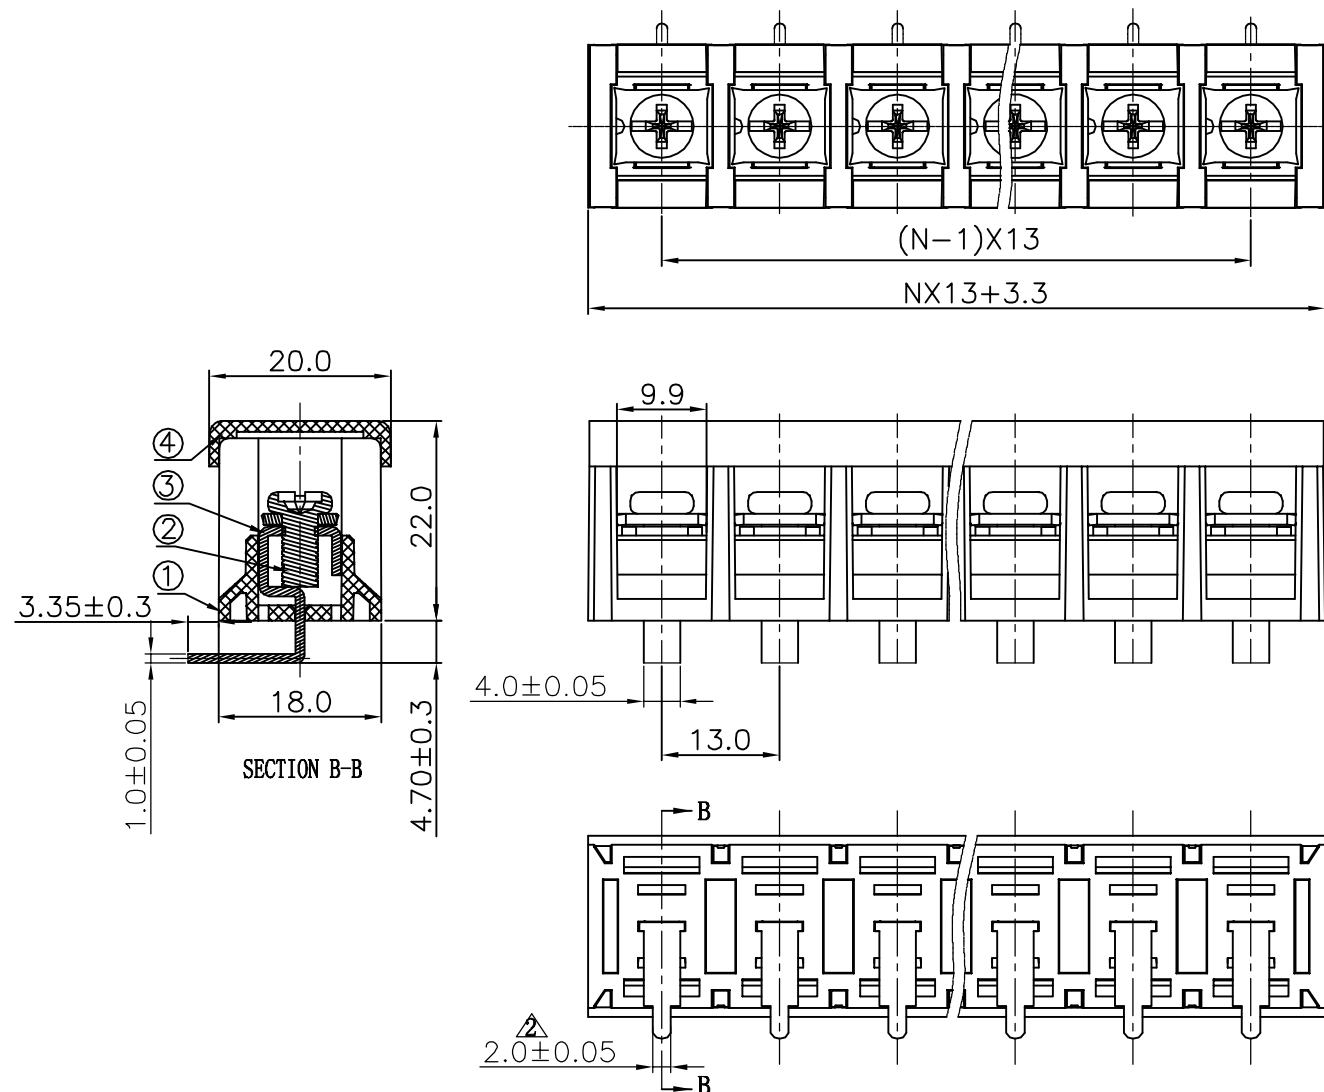


REVISION RECORD					
REV	ECO	DESCRIPTION	DRFT	DATE	
①		25%GF更改为23%GF	CSX	03/24/06	
②		脚宽由1.2变更为2.0	CSX	08/15/06	
③		增加UL刻字	CSX	04/17/06	
④		品名、料号增加环保标识“00”	YeJ	12/08/07	

Notes:

1. Pitch:13mm , Poles:2-20P
2. Rated current:40A
3. Rated voltage:600V
4. Operation temperatures:-30° C~+120° C
5. Insulation Withstand Voltage:AC2000V/1Min
6. Insulation Resistance:1000M Ω /DC500V
7. Wire Range:18~10AWG
8. Max. Torque Value:12. 24kgf. cm
9. Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm						
to	from	to	from	to	from	to	from	
6	over 6	10	over 10	30	over 30	60	over 60	150
10	to 10	24	to 24	30	to 30	60	to 60	150
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	±0.05/0.1



4	DG78-Cover	5034C07XXA (H)	1	PC	
3	DG78R Pin header	5009B00050 (H)	XX	Brass	SnCe plated
2	M4*8 (8*10) bright Screws	S000000510 (H)	XX	Steel	Ni plated

1	DG78 Housing	5034A0YXXA (H)	1	PA66+23%GF	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DETACHED LISTS	MM (INCH)	DFTO Zhuwm	DATE 01/13/06"	宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD NAME DG78R-B-XXP-1Y-00A(H) DRAWING NO. DG78R-E02 /PART NO. DO NOT SCALE DRAWING SHEET 1 OF 1	
	TOLERANCES EXCEPT AS NOTED	CHKD	DATE		
	MM	MFO	DATE		
	.0 ±	APPVL	DATE		
	.00 ±	MATERIAL :			
	.000 ±	ANGLES ± 1°	G.E :		
		THIRD ANGLE PROJECTION	FINISH :		
		SCALE : 1:1			