
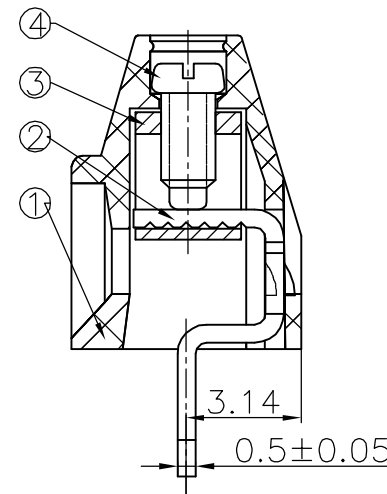


REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE
1		Drawing Revise	Haoyh	03/23/06
2		增加UL刻字	CSX	10/04/06
3		增加VDE刻字	CSX	10/24/07
4		品名、料号增加环保标示“(H)”	CSX	12/10/07
5	10-0047	铜方块品名变更	Mickey	03/23/10

Notes:**1.Pitch:2.54mm****2.Rated voltage/current:UL 150V/6A****VDE 130V/8A****3.Operation temperatures:-40℃~+105℃****4.Withstanding Voltage:AC2000V/1Min****5.Insulation Resistance:5000MΩ/DC1000V****6.Wire Range:26-18AWG,1.0mm²****7.Max.Torque Value:1.5kgf.cm****8.Undimensioned Tolerances:**

Pitch range in mm		Nominal dimension range in mm						
to	over	to	over	to	over	to	over	
6	6	10	10	30	60	100	150	∩
6	10	24	30	60	100	150		◇
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

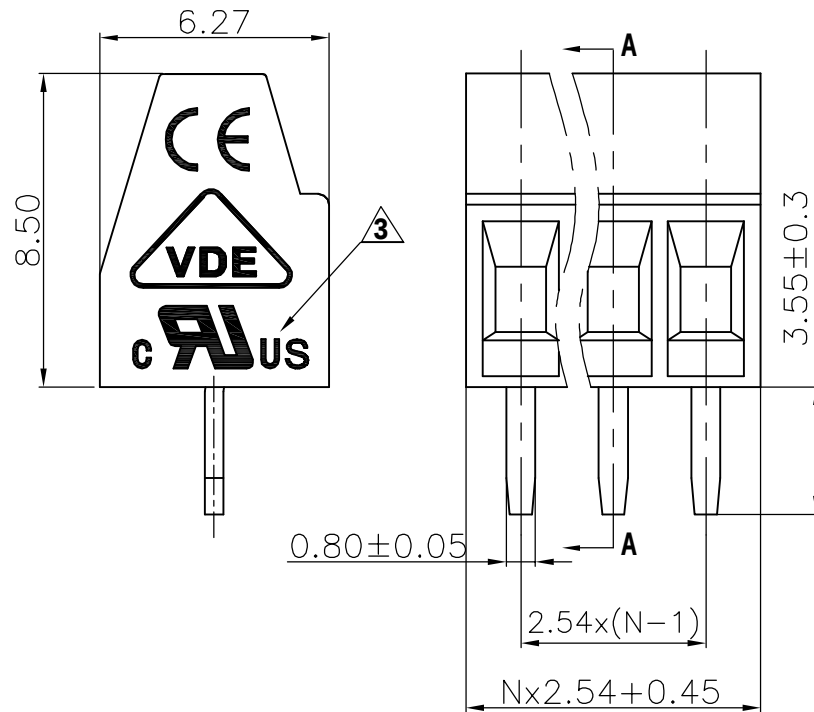

4	DG308-Screws	S000000500(H)	XX	Steel	Cr ³⁺ Zn
3	DG308-Cage	X000000320(H)	XX	Brass	Ni plated
2	DG308-Pin header	4024B00010(H)	XX	Brass	SnCe

1	DG308-Housing	4024A0YXXA (H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
TOLERANCES EXCEPT AS NOTED		DATE 03/03/04"			
MM (INCH)		DATE			
TOLERANCES EXCEPT AS NOTED		DATE			
MM		DATE			
.0 ±		DATE			
.00 ±		DATE			
.000 ±		DATE			
ANGLES ± 1°		DATE			
THIRD ANGLE PROJECTION		DATE			
SCALE : 1:1		DATE			
DO NOT SCALE DRAWING		DATE			
SHEET 1		DATE			
OF 1		DATE			