





REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
1		图面更新	CSX	07/20/06
2		增加UL刻字	YeJ	11/06/06

NOTES:

1. Pitch:7.62mm , Poles:2-24P
2. Rated current:10A
3. Rated voltage:300V
4. Operation temperatures:-40° C~+105° C
5. Insulation Withstand Voltage:AC2000V/1Min
6. Insulation Resistance:500MΩ /DC500V
7. Wire Range:22~14AWG
8. Max. Torque Value:5.10Kgf. cm
9. Undimensioned Tolerances:

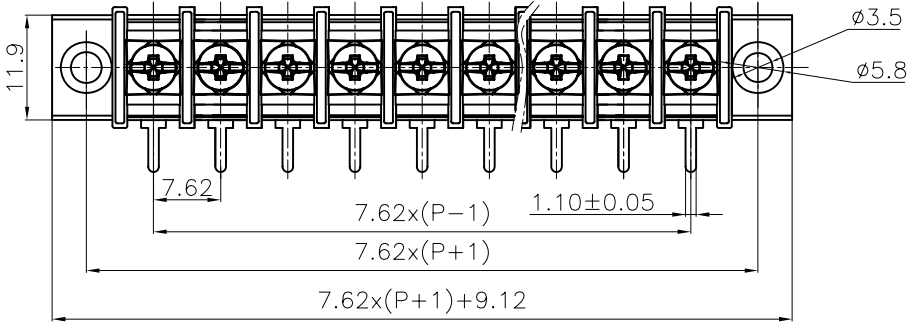

Pitch range in mm		Nominal dimension range in mm						
to 6	over 6 to 10	over 10 to 24	to 6	over 6 to 30	over 30 to 90	over 90 to 200	over 200 to 480	—
±0.10	±0.15	±0.25	±0.1	±0.2	±0.3	±0.5	±0.7	0.05/10

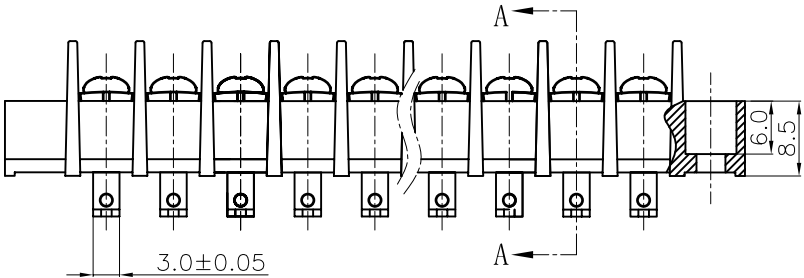

3	3*6 Bright-Screws	S000000450 (H)	XX	Steel	Ni plated
2	DG25R-Pin header	5001B00060 (H)	XX	Brass	SnCe

1	DG25R-A Housing	5001M0YXXA (H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DETACHED LISTS	MM (INCH)	DFTO Home	DATE 03/28/06*	宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD	
	TOLERANCES EXCEPT AS NOTED	CHKD	DATE		
		MFO	DATE		
		APPVL	DATE		
		MATERIAL :			
	MM .0 ± .00 ± .000 ±	ANGLES ± 1°	G.E :	NAME DG25R-A-XXP-1Y-00A(H)	
			FINISH :	DRAWING NO. DG25R-E07	
			SCALE : 1:1	DO NOT SCALE DRAWING	
				SHEET 1 OF 1	