


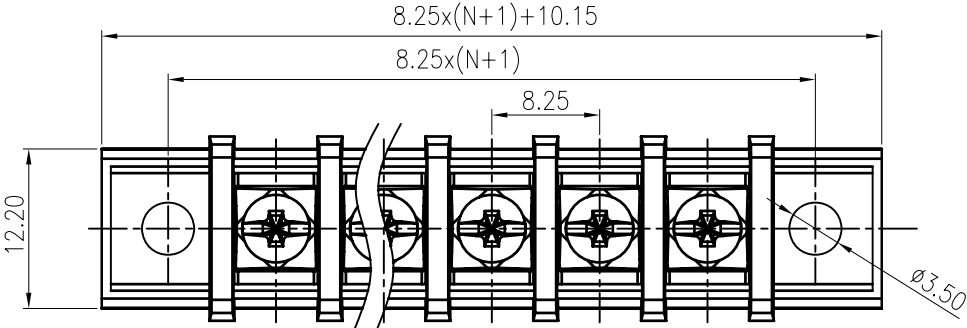
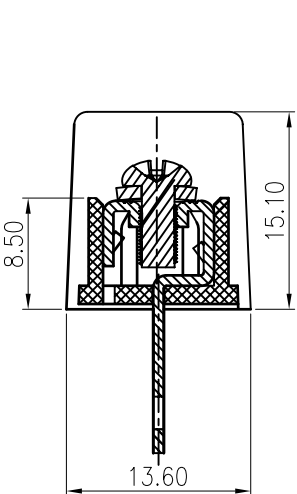


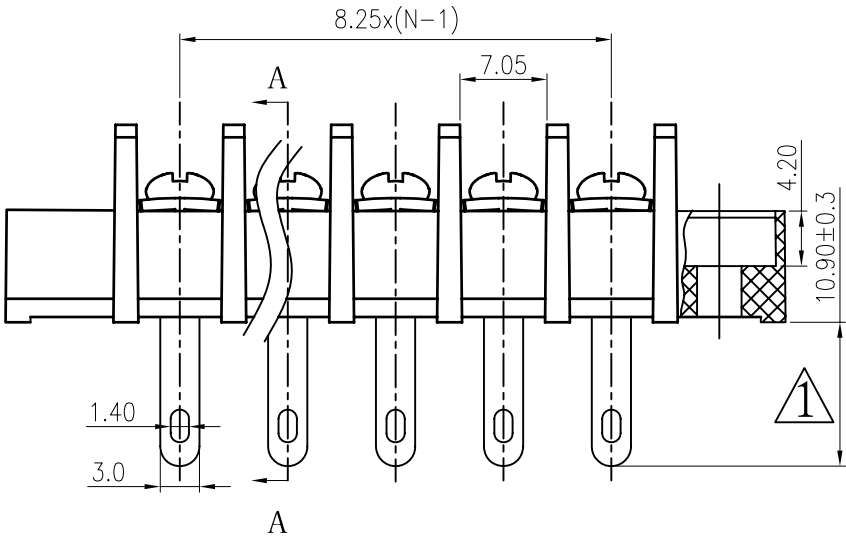

REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
1		10.20±0.10---10.9±0.30	CSX	05/14/05
2		图面更新	CSX	12/26/05
3		增加UL刻字	CSX	06/05/06
4		品名、料号增加环保标识“(H)”	YeJ	12/08/07
5		工程变更, 商标品名改到侧面	LJH	09/03/08




SECTION A-A

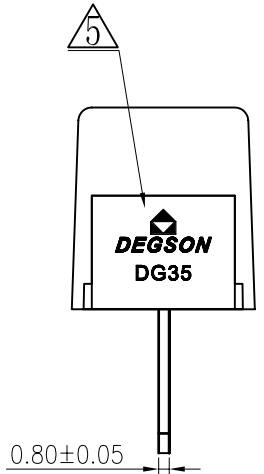

- NOTES:
- Pitch:8.25mm ,Poles:2P-24P
 - Rated voltage/current: UL1059 300V/20A
IEC 450V/32A
 - Operation temperature: -40° C ~+105° C
 - Withstanding Voltage: AC2000V/1Min
 - Insulation Resistance: 500MΩ/DC500V
 - Wire Range: 22-12AWG; 4mm²
 - Max.Torque Value: M3, 5.10Kgf.cm
 - Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm							
to	over	to	to	over	over	over	over	over		
6	10	10	30	30	60	100	150			⌒
to 6	to 10	to 24	to 30	to 60	to 100	to 150				▱
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10		

3	3*6 bright-Screw	S000000450 (H)	XX	Steel	Ni Plated
2	DG25H-Pin Header	5001B00030 (H)	XX	Brass	SnCe
1	DG35H-A-Housing	5002M0YXXA (H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES
DETACHED LISTS	← MM (INCH) →		DFTO CSX	DATE 05/13/05	 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD
	TOLERANCES EXCEPT AS NOTED		CHKD	DATE	
			MFO	DATE	
			APPVL	DATE	
	MM		NAME		
	.0 ±	±	DG35H-A-XXP-1Y-00A(H)		
	.00 ±	±			
	.000 ±	±			
	ANGLES ± 1°		MATERIAL :		
		G.E :			
		FINISH :			
		SCALE : 1:1			
THIRD ANGLE PROJECTION			DO NOT SCALE DRAWING		
			DRAWING NO. DG35H-E03		
			/PART NO.		
			SIZE A3		
			REV T5 09/03/08		
			SHEET 1 OF 1		