

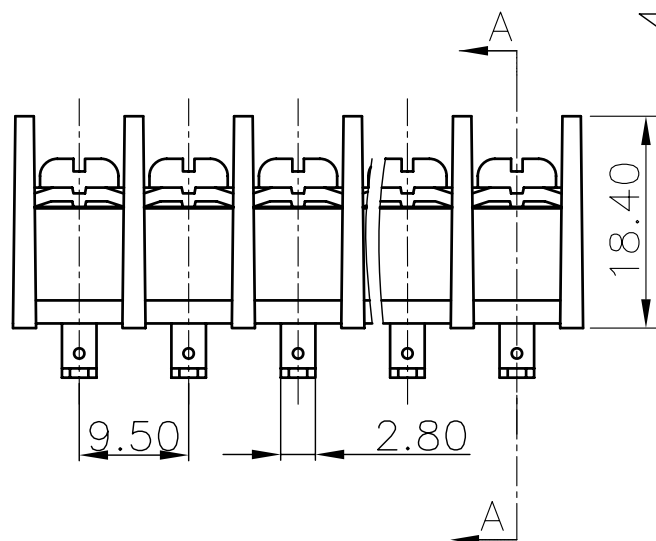


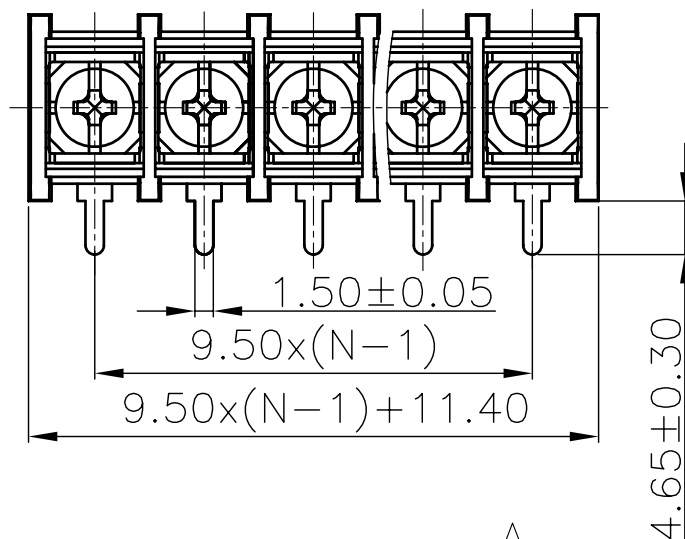

Notes:


1. Pitch: 9.5mm
2. Rated current: 25A
3. Rated voltage: 300V
4. Operation temperatures: -40° C ~ +105° C
5. Insulation Withstand Voltage: AC2000V/1min
6. Insulation Resistance: 500MΩ/DC500V
7. Wire Range: 22~12AWG
8. Max. Torque Value: 12.24kgf.cm
9. Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm			
to 6	over 6 to 10	over 10 to 24	to 6	over 6 to 30	over 30 to 90	over 90 to 200
to 6	over 6 to 10	over 10 to 24	to 6	over 6 to 30	over 30 to 90	over 90 to 200
to 6	over 6 to 10	over 10 to 24	to 6	over 6 to 30	over 30 to 90	over 90 to 200
to 6	over 6 to 10	over 10 to 24	to 6	over 6 to 30	over 30 to 90	over 90 to 200
to 6	over 6 to 10	over 10 to 24	to 6	over 6 to 30	over 30 to 90	over 90 to 200
to 6	over 6 to 10	over 10 to 24	to 6	over 6 to 30	over 30 to 90	over 90 to 200
to 6	over 6 to 10	over 10 to 24	to 6	over 6 to 30	over 30 to 90	over 90 to 200
to 6	over 6 to 10	over 10 to 24	to 6	over 6 to 30	over 30 to 90	over 90 to 200
to 6	over 6 to 10	over 10 to 24	to 6	over 6 to 30	over 30 to 90	over 90 to 200

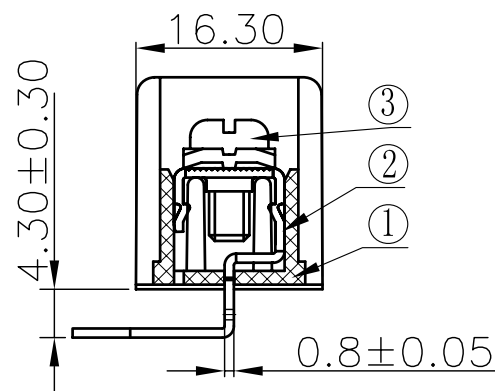

Section A-A

REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
1		图面更新	CSX	02/28/06



1	DG45R-B Housing	5003A0YXXA (H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DETACHED LISTS					
TOLERANCES EXCEPT AS NOTED		DFTO Home	DATE 12/09/05*	DEGSON® 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD	
MM (INCH)		CHKD	DATE		
.0 ±		MFO	DATE		
.00 ±		APPVL	DATE		
.000 ±		MATERIAL :		NAME DG45R-B-XXP-1Y-00A(H)	
ANGLES ± 1°		G.E :		DRAWING NO. DG45R-E19	
THIRD ANGLE PROJECTION		FINISH :		/PART NO.	
		SCALE : 1:1		DO NOT SCALE DRAWING	
				SHEET 1 OF 1	

3	4*8(7.5*7.5)Bright Screws	S000000570 (H)	XX	Steel	Ni plated
2	DG45R Pin header	5003B00060 (H)	XX	Brass	SnCe