
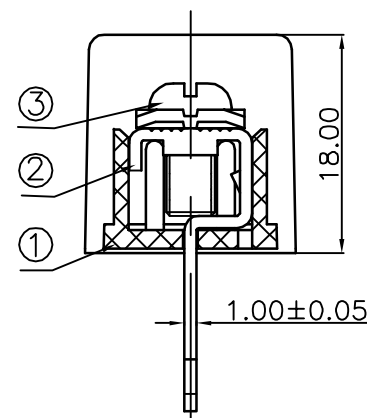
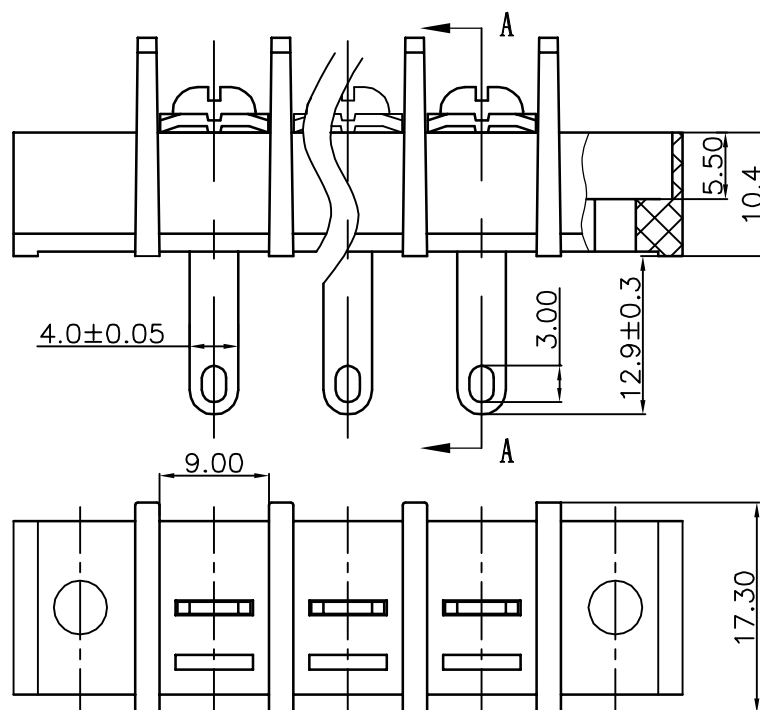


REVISION RECORD					
REV	ECO	DESCRIPTION	DRFT	DATE	
3		图面更新	HW	06/08/06	
4		增加UL刻字	CSX	11/23/06	
5		品名、料号增加环保标识“(H)”	YeJ	12/08/07	

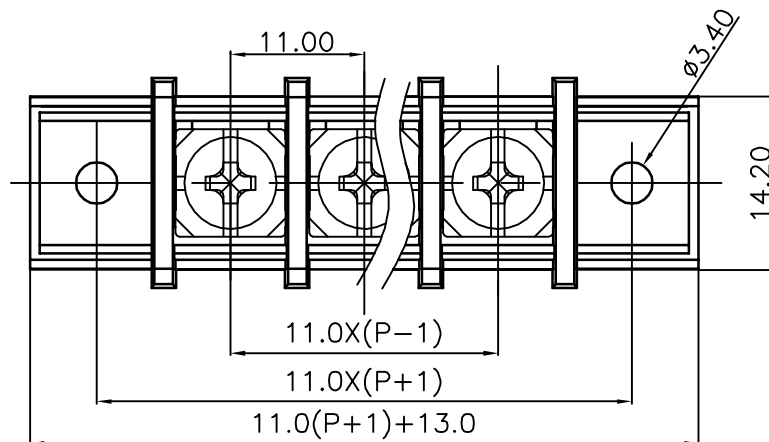


Section A-A

Notes:

1. Pitch: 11.0mm Pole: 2-20P
2. Rated current: 20A
3. Rated voltage: 300V
4. Operation temperatures: -40°C ~ +105°C
5. Withstanding Voltage: AC2000V/1min
6. Insulation Resistance: 500MΩ/DC500V
7. Wire Range: 22~12AWG
8. Max. Torque Value: 12.24kgf.cm
9. Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm					
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	±0.05/10

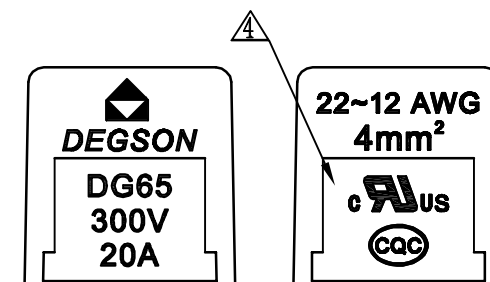

3	4*8(9*9)big cover and bright Screws	S000000580(H)	XX	Steel	Ni plated
2	DG65H Pin header	5005B00040(H)	XX	Brass	SnCe

1	DG65-A Housing	5005MOYXXA(H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DETACHED LISTS	MM (INCH)	DFTO WSJ	DATE 03/03/04	宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD NAME: DG65H-A-XXP-1Y-00A(H) DRAWING NO. DG65H-E03 /PART NO. DO NOT SCALE DRAWING SHEET 1 OF 1	
	TOLERANCES EXCEPT AS NOTED	CHKD	DATE		
	MM	MFO	DATE		
	.0 ±	APPL	DATE		
	.00 ±	MATERIAL :			
	.000 ±	ANGLES ± 1°	G.E :		
		FINISH :			
	THIRD ANGLE PROJECTION	SCALE : 1;1			