
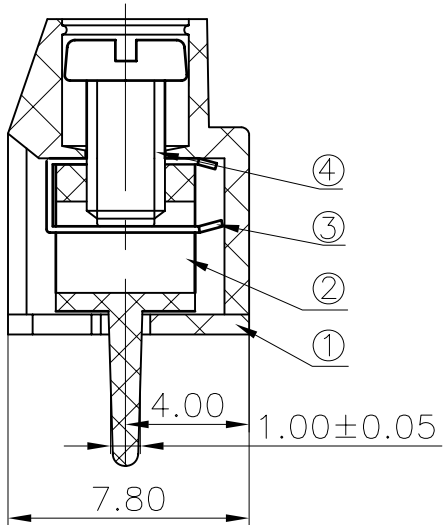
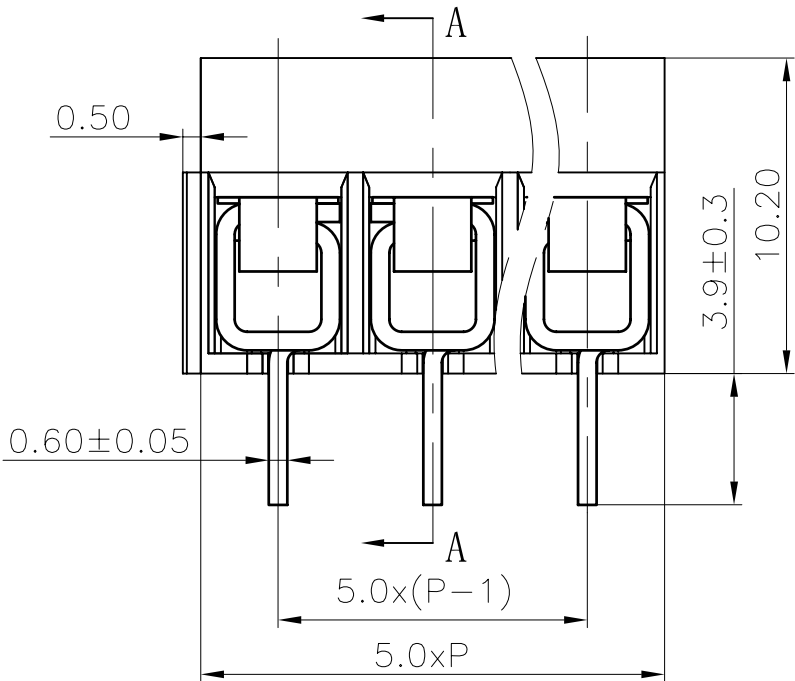




REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
△		Drawing Revise	Haoyh	03/18/06
△		增加UL刻字	CSX	12/14/06

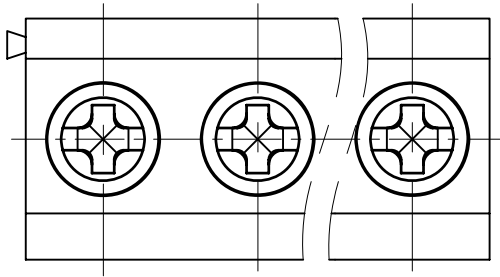

SECTION A-A

Notes:

1. Pitch:5.0mm
2. Rated current:10A
3. Rated voltage:300V
4. Operation temperatures:-40℃~+105℃
5. Withstanding Voltage:AC1500V/1Min
6. Insulation Resistance:5000MΩ/DC1000V
7. Wire Range:26~14AWG, 1.5mm²
8. Max. Torque Value:4.08kgf.cm
9. Undimensioned Tolerances:

Pitch range in mm			Normal dimension range in mm						—
to	over	over	to	over	over	over	over	over	∩
6	6 to 10	10 to 24	6	6 to 30	30 to 90	90 to 200	200 to 480	480 to 1000	∇
±0.10	±0.15	±0.25	±0.1	±0.2	±0.3	±0.5	±0.7	±0.05/10	

4	DG126"十"Screws-M2.5	S000001510	XX	steel	Cr ³⁺ Zn
3	DG306 Spring	X000000160 (H)	XX	stainless steel	
2	DG306 Pin	4006B00020 (H)	XX	Brass	SnCe
1	DG126-5.0-Housing	4019A0YXXA (H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES

DETACHED LISTS	MM (INCH)		DFTO HA0YH	DATE 04/06/05	 DEGSON® 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD	
	TOLERANCES EXCEPT AS NOTED		CHKD	DATE		
			MFO	DATE		
			APPVL	DATE	NAME DG126-5.0-XXP-1Y-00A(H)	
			MATERIAL :			
	ANGLES ± 1°		G.E :		DRAWING NO. DG126-5.0-E02	
	 THIRD ANGLE PROJECTION		FINISH :		/PART NO.	
			SCALE : 1:1		DO NOT SCALE DRAWING	
				SHEET 1 OF 1		