

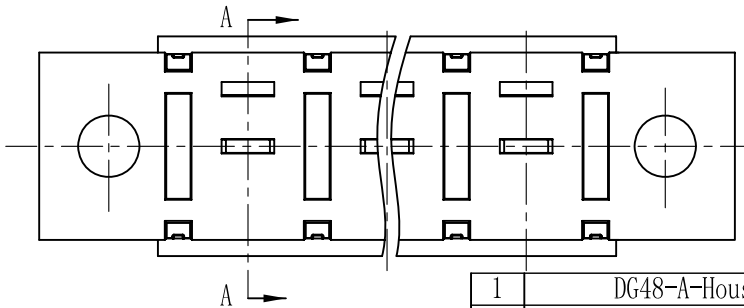

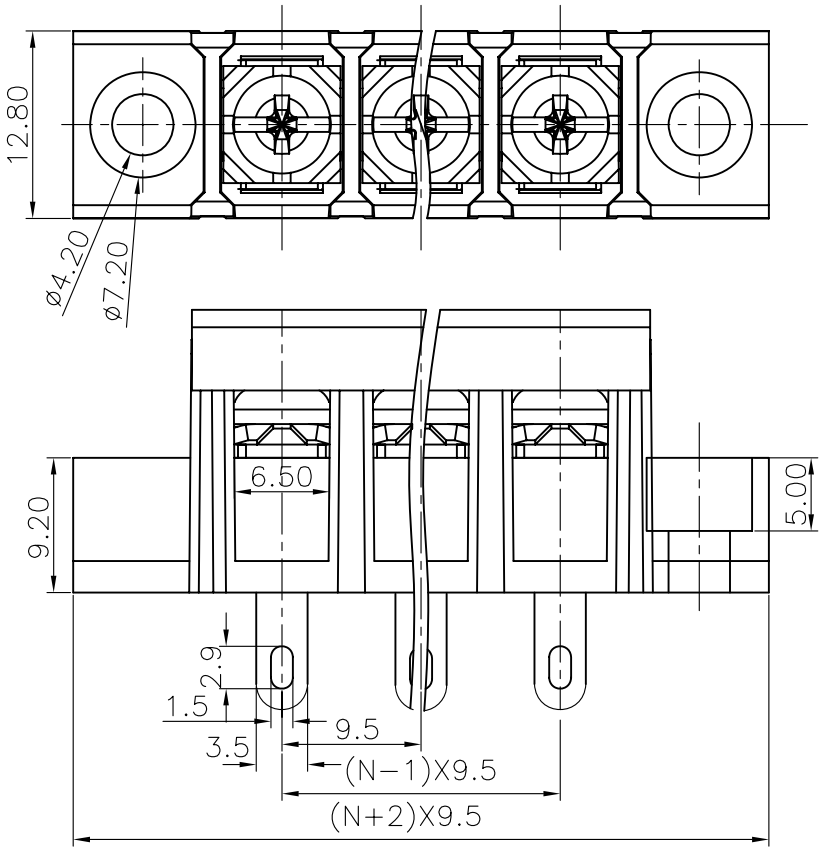


REVISION RECORD					
REV	ECO	DESCRIPTION	DRFT	DATE	
1		增加UL刻字	CSX	03/16/07	
2		品名、料号增加环保标识“(H)”	YeJ	12/08/07	

- Notes:
- 1. Pitch:9.5mm ,Poles:2-20P
 - 2. Rated current:20A
 - 3. Rated voltage:300V
 - 4. Operation temperatures:-40° C~+105° C
 - 5. Insulation Withstand Voltage:AC2000V/Min
 - 6. Insulation Resistance:500M Ω /DC500V
 - 7. Wire Range:22~12AWG
 - 8. Max. Torque Value:12.24kgf.cm
 - 9. Undimensioned Tolerances:


Pitch range in mm		Nominal dimension range in mm							—
		over 6 to 6	over 10 to 24	over 30 to 60	over 60 to 100	over 100 to 150	over 150	—	
		± 0.10	± 0.15	± 0.25	± 0.2	± 0.3	± 0.5	± 0.7	± 1.0
									0.05/10

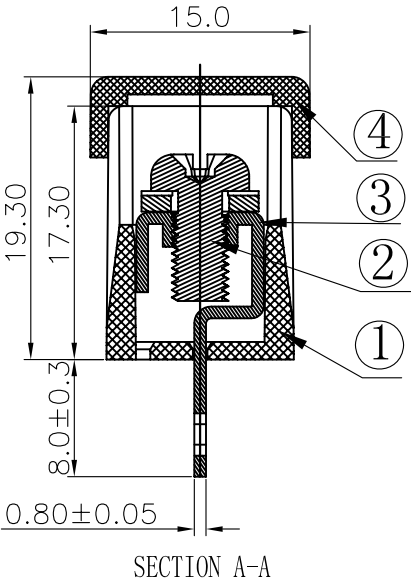

4	DG48-Cover	5051C07XXA(H)	1	PC	
3	DG58H Pin header	5008B00050(H)	XX	Brass	SnCe plated
2	M4*8(7.5*7.5)bright Screws	S000000570(H)	XX	Steel	Ni plated

1	DG48-A-Housing	5051M0YXXA(H)	1	PA66+23%GF	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
TOLERANCES EXCEPT AS NOTED		DFTO: Zhuwm	DATE 01/13/06"	DEGSON® 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD	
MM (INCH)		CHKD	DATE		
.0 ±		MFO	DATE		
.00 ±		APPVL	DATE		
.000 ±		MATERIAL :		NAME	
ANGLES ± 1°		G.E :		DG48H-A-XXP-1Y-00A(H)	
THIRD ANGLE PROJECTION		FINISH :		DRAWING NO. DG48H-E01	
		SCALE : 1:1		/PART NO.	
		DO NOT SCALE DRAWING		SHEET 1 OF 1	

DETACHED LISTS



H

G

F

E

D

C

B

A