
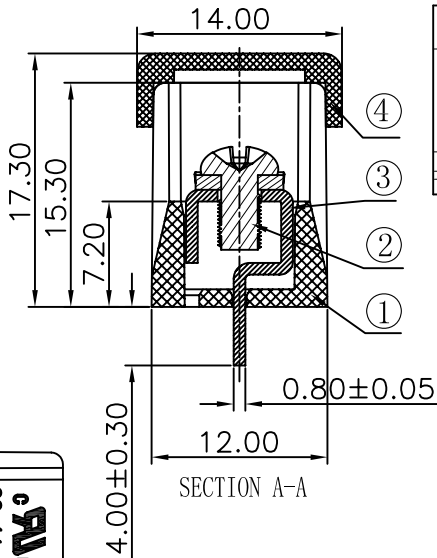

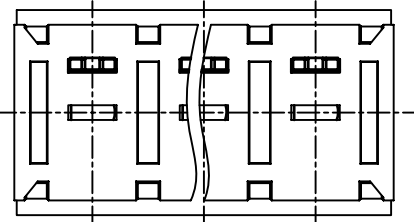

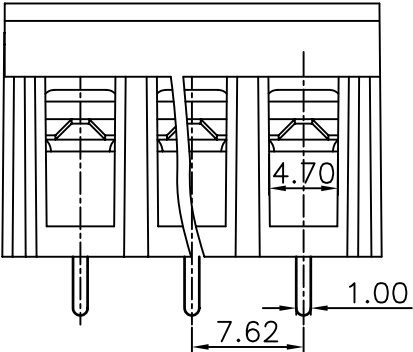


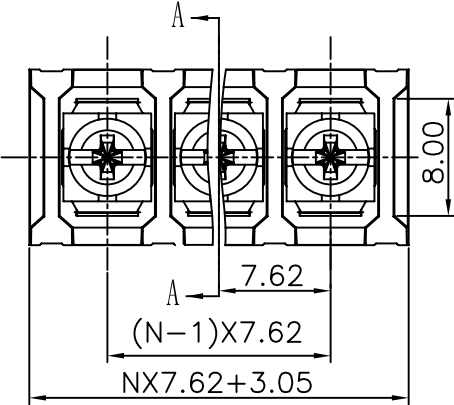

REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
1		增加UL刻字	CSX	03/21/07
2		品名、料号增加环保标识“(H)”	YeJ	12/08/07

- Notes:
1. Pitch:7.62mm ,Poles:2-26P
 2. Rated current:15A
 3. Rated voltage:300V
 4. Operation temperatures:-40° C~+105° C
 5. Insulation Withstand Voltage:AC2000V/Min
 6. Insulation Resistance:500MΩ /DC500V
 7. Wire Range:22~14AWG
 8. Max.Torque Value:5.1kgf.cm
 - 9.Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm						
to 6	over 6 to 10	over 10 to 24	over 30 to 60	over 60 to 100	over 100 to 150	over 150		
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

4	DG28-Cover	5006C07XXA (H)	1	PC	
3	DG28C Pin header	5006B00010 (H)	XX	Brass	SnCe plated
2	M3*6(6*6)bright Screws	S000000450 (H)	XX	Steel	Ni plated

1	DG28-B-本体	5006A0YXXA (H)	1	PA66+23%GF	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES
TOLERANCES EXCEPT AS NOTED		DFTO Zhuhm	DATE 03/13/06	DEGSON® 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD	
MM (INCH)		CHKD	DATE		
.0 ±		MFO	DATE		
.00 ±		APPVL	DATE		
.000 ±		MATERIAL :		NAME DG28C-B-XXP-1Y-00A (H)	
ANGLES ± 1°		G.E :		DRAWING NO. DG28C-E02	
THIRD ANGLE PROJECTION		FINISH :		/PART NO.	
		SCALE : 1:1		DO NOT SCALE DRAWING	
				SHEET 1 OF 1	