






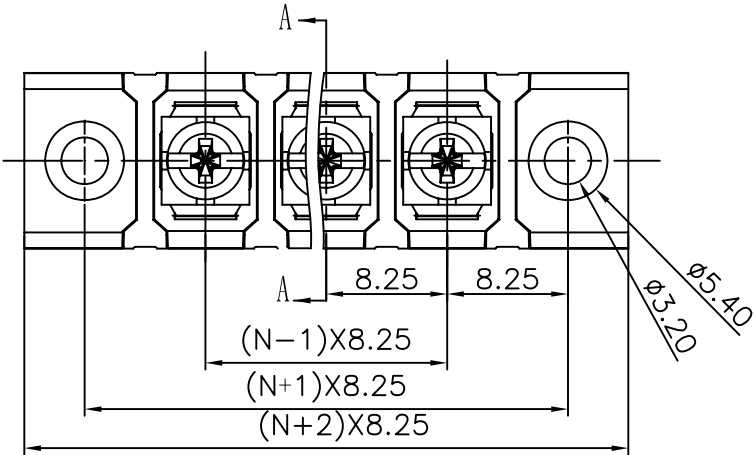


Notes:

1. Pitch:8.25mm ,Poles:2-24P
2. Rated current:15A
3. Rated voltage:300V
4. Operation temperatures:-40° C~+105° C
5. Insulation Withstand Voltage:AC2000V/Min
6. Insulation Resistance:500M Ω /DC500V
7. Wire Range:22~14AWG
8. Max. Torque Value:5.1kgf.cm
9. Undimensioned Tolerances:

REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
1		增加UL刻字	CSX	03/13/07
2		品名、料号增加环保标识“(H)”	YeJ	12/08/07

Pitch range in mm		Nominal dimension range in mm						
to	over	to	over	to	over	to	over	
6	6 to 10	10 to 24	30 to 60	60 to 100	100 to 150	150 to 300	300 to 600	mm
± 0.10	± 0.15	± 0.25	± 0.2	± 0.3	± 0.5	± 0.7	± 1.0	0.05/1.0

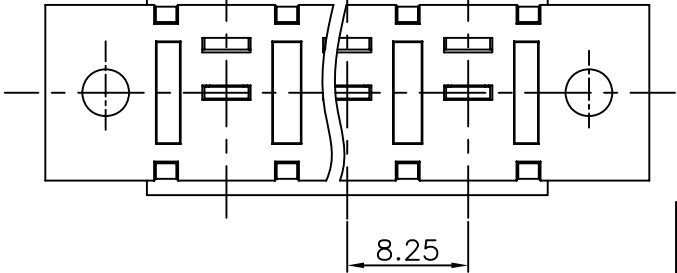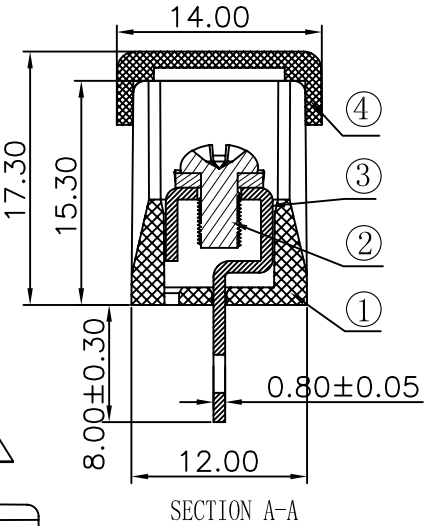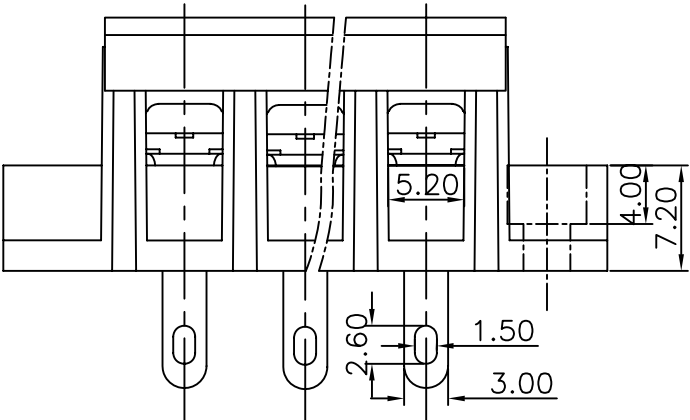

4	DG38-Cover	5050C07XXA (H)	1	PC	
3	DG28H Pin header	5006B00050 (H)	XX	Brass	SnCe plated
2	M3*6(6*6)bright Screws	S000000450 (H)	XX	Steel	Ni plated

1	DG38-A housing	5050M0YXXA (H)	1	PA66+23%GF	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
TOLERANCES EXCEPT AS NOTED		DFTO Zhuhm	DATE 12/28/05	DEGSN® 宁波高正电子有限公司 DEGSN ELECTRONICS CO., LTD	
MM (INCH)		CHKD	DATE		
TOLERANCES EXCEPT AS NOTED		MFO	DATE		
TOLERANCES EXCEPT AS NOTED		APPVL	DATE		
MATERIAL :		NAME		DG38H-A-XXP-1Y-00A (H)	
ANGLES $\pm 1^\circ$		G.E :		DRAWING NO. DG38H-E01	
THIRD ANGLE PROJECTION		FINISH :		/PART NO.	
SCALE : 1:1		DO NOT SCALE DRAWING		SHEET 1 OF 1	