

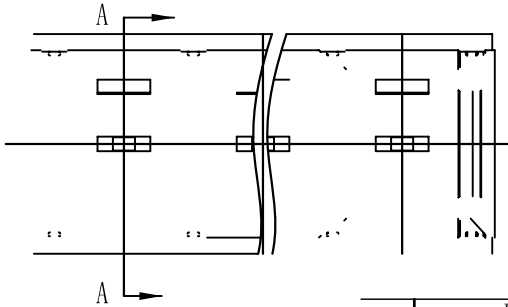



REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
1		增加UL刻字	CSX	03/16/07
2		品名、料号增加环保标识“(H)”	YeJ	12/08/07

Notes:

1. Pitch:9.5mm ,Poles:2-22P
2. Rated current:20A
3. Rated voltage:300V
4. Operation temperatures:-40° C~+105° C
5. Insulation Withstand Voltage:AC2000V/Min
6. Insulation Resistance:500MΩ /DC500V
7. Wire Range:22~12AWG
8. Max. Torque Value:12.24kgf.cm
9. Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm						
to 6	over 6 to 10	over 10 to 24	over 30 to 30	over 60 to 60	over 100 to 100	over 150 to 150		
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

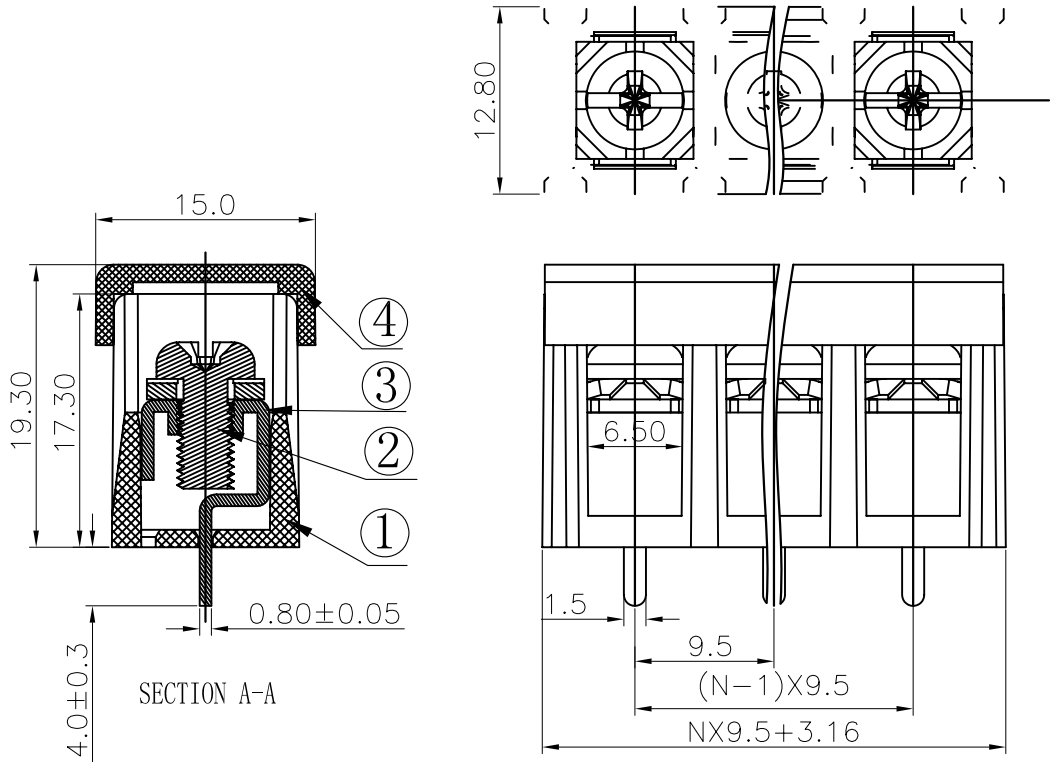

ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES
------	--------------	-------------	------	----------	-------

Zhuwm DATE 01/13/06"
DATE
DATE

DEGSON® 宁波高正电子有限公司
DEGSON ELECTRONICS CO., LTD

NAME
DG48C-B-XXP-1Y-00A(H)
DG48C-E02

4	DG48-Cover	5051C07XXA (H)	1	PC	
3	DG58C Pin header	5008B00010 (H)	XX	Brass	SnCe plated
2	M4*8 (7.5*7.5) bright Screws	S000000570 (H)	XX	Steel	Ni plated