


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
1		增加UL刻字	CSX	03/13/07
2		品名、料号增加环保标识“(H)”	YeJ	12/08/07

- Notes:
1. Pitch:10mm , Poles:2-20P
 2. Rated current:20A
 3. Rated voltage:300V
 4. Operation temperatures:-40° C~+105° C
 5. Insulation Withstand Voltage:AC2000V/Min
 6. Insulation Resistance:500MΩ /DC500V
 7. Wire Range:22~14AWG
 8. Max. Torque Value:12. 24kgf. cm
 9. Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm						
to	over	to	over	to	over	to	over	
6	6 to 10	10	10 to 24	30	30 to 60	60	60 to 100	100 to 150
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	±0.05/10

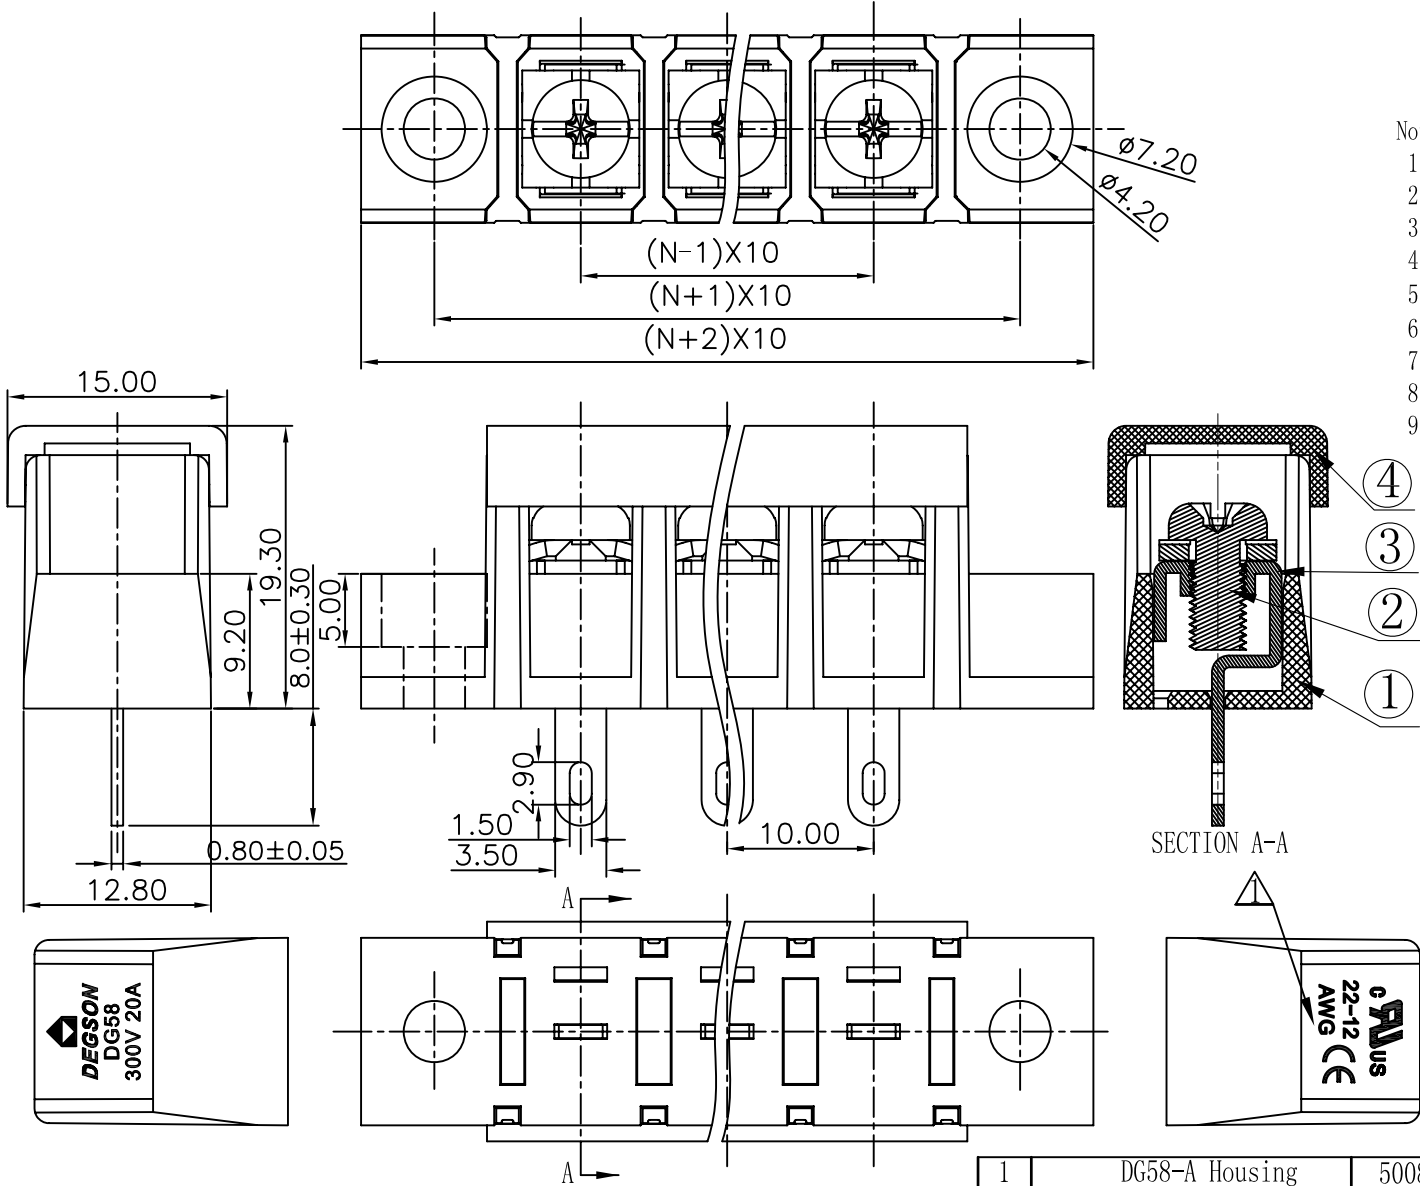

4	DG58-Cover	5008C07XXA (H)	1	PC	
3	DG58H Pin header	5008B00050 (H)	XX	Brass	SnCe plated
2	M4*8(7.5*7.5)bright Screws	S000000570 (H)	XX	Steel	Ni plated

1	DG58-A Housing	5008M0YXXA (H)	1	PA66+23%GF	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
TOLERANCES EXCEPT AS NOTED		DATE 01/13/06"	DEGSON® 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD		
MM (INCH)		DATE			
TOLERANCES EXCEPT AS NOTED		DATE			
TOLERANCES EXCEPT AS NOTED		DATE			
TOLERANCES EXCEPT AS NOTED		DATE	NAME		
TOLERANCES EXCEPT AS NOTED		DATE	DG58H-A-XXP-1Y-00A(H)		
TOLERANCES EXCEPT AS NOTED		DATE	DRAWING NO. DG58H-E01		
TOLERANCES EXCEPT AS NOTED		DATE	/PART NO.		
TOLERANCES EXCEPT AS NOTED		DATE	DO NOT SCALE DRAWING		
TOLERANCES EXCEPT AS NOTED		DATE	SHEET 1 OF 1		