



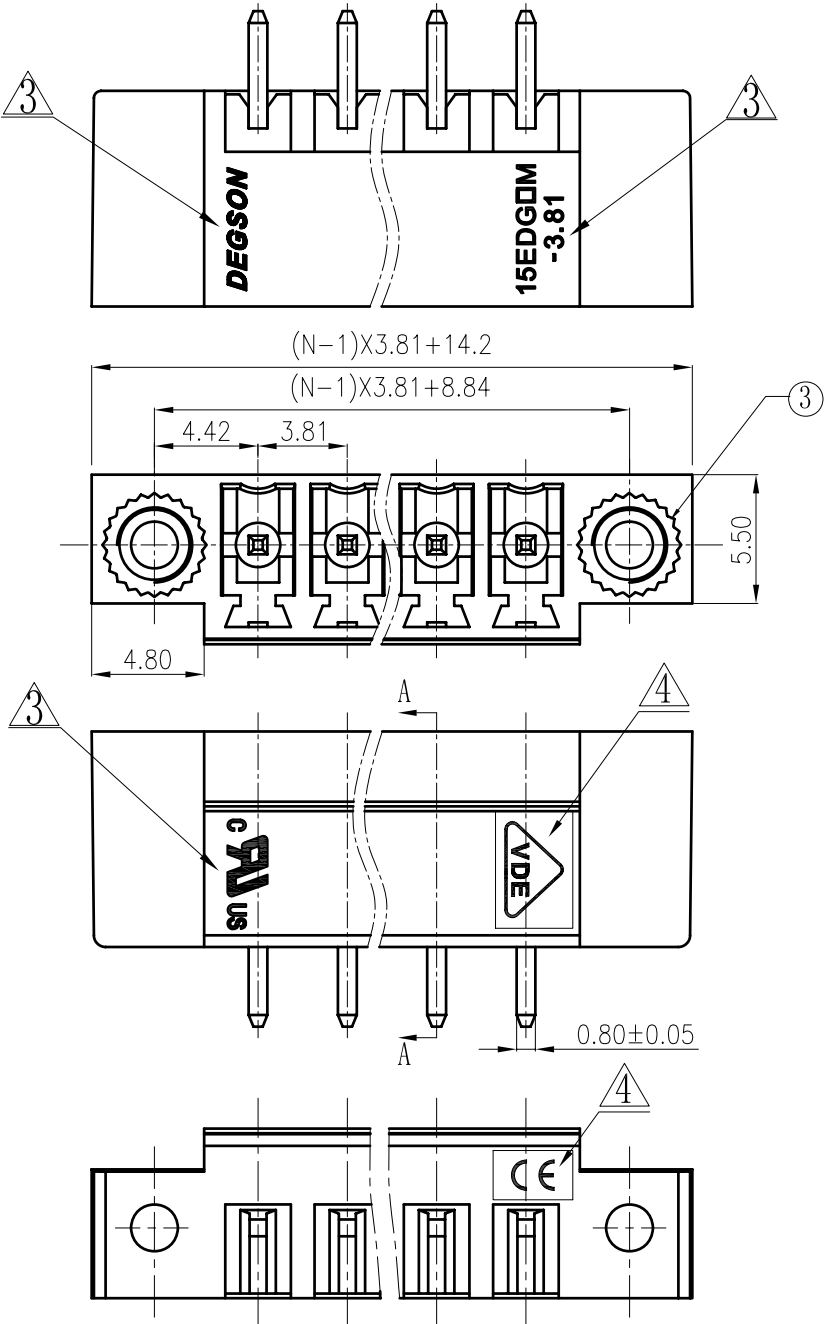

- Notes:
- 1.Pitch: 3.81mm poles:2-24p
 - 2.Rated voltage/current: UL 300V/8A
 VDE 250V/7A
 - 3.Operation tempratures:-40° C~+105° C
 - 4.Withstanding voltage: AC2000V/1Min
 - 5. Insulation resistance:5000MΩ/DC1000V
 - 6.Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm						
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150		
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10	

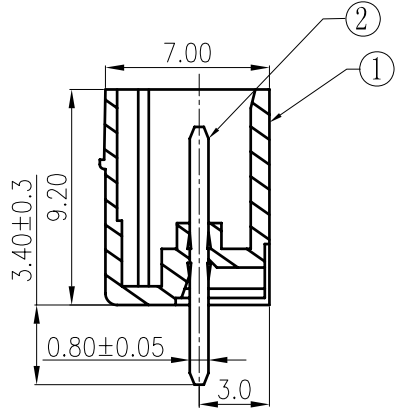

3	2EDG screw cap	S000000040 (H)	2	Brass	
2	15EDGVC Pin header	1002B00010 (H)	XX	Brass	SnCe
1	15EDGV (R)M-3.81-Housing	1004A0YXXA (H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DETACHED LISTS	← MM (INCH) →		 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD		
	TOLERANCES EXCEPT AS NOTED				
	DFTO DZJ				
	DATE 09/15/05*				
	MM		NAME		
	.0 ±		15EDGVM-3.81-XXP-1Y-00A (H)		
	.00 ±		DRAWING NO. 15EDGVM-3.81-E02		
	.000 ±		/PART NO.		
	ANGLES ± 1°		DO NOT SCALE DRAWING		
	THIRD ANGLE PROJECTION		SHEET 1 OF 1		