

REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE



Notes:

1. Pitch:3.81mm , Poles:2-22P
2. Rated voltage/current:UL 300V/8A
VDE 250V/7A
3. Operation temperatures:-40℃~+105℃
4. Withstanding Voltage:AC2000V/1Min
5. Insulation Resistance:5000MΩ /DC1000V
6. Wire Range:28~16AWG, 0.5-1.5mm²
7. Max. Torque

Value:M2, 2.04kgf. cm(1.77Lb. in)

8. Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm					—
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1
							0.05/10

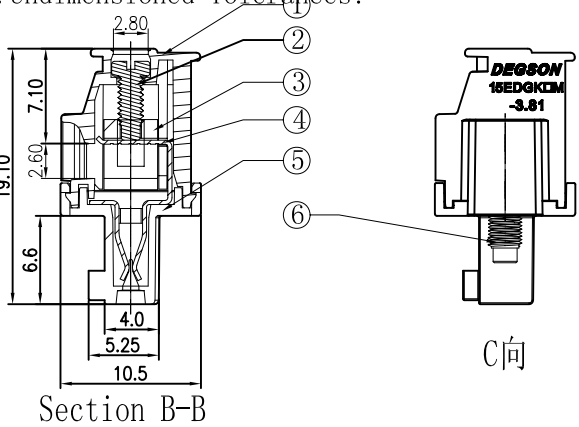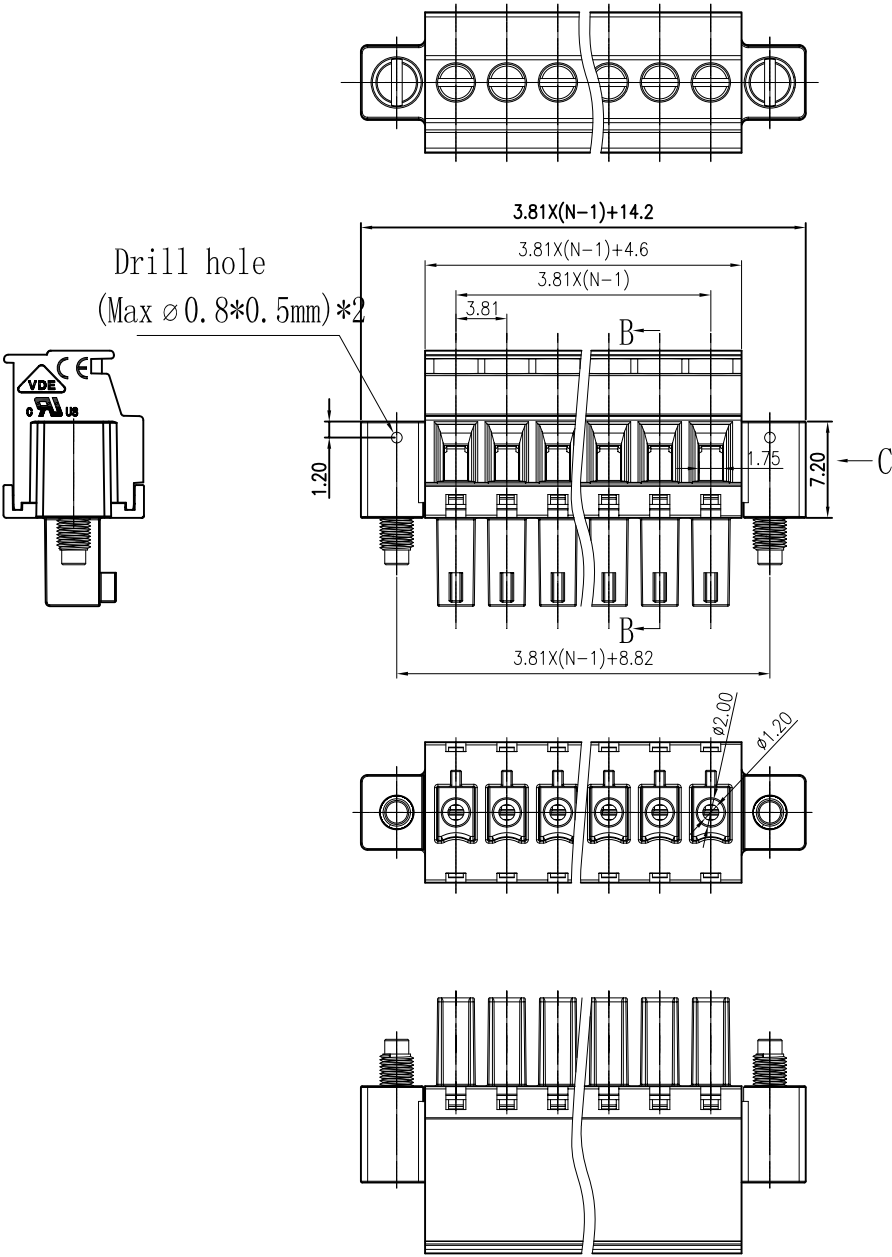

6	2EDG Screw-M2.5	S000001370(H)	2	Steel	Cr ³⁺ Zn
5	15EDGKA/B-3.81-100A-Cover	1041COYXXE(H)	1	PA66	UL94V-0
4	15EDGKA/B-100A-Clamp	1033B00020(H)	XX	Phosphor bronze	SnCe
3	15EDGK Cage	X000000010(H)	XX	Brass	Ni Plated
2	15EDG Screw-M2.0	S000001360(H)	XX	Steel	Cr ³⁺ Zn
1	15EDGKA/BM-3.81-100A-Housing	1047A0YXXE(H)	1	PA66	UL94V-0

ITEM	NAME OF PART		NO. OF PART		Q"TY	MATERIAL	NOTES	
DETACHED LISTS	← MM (INCH) →		DFTO Apply	DATE 04/11/09*	 DEGSON® 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD			
	TOLERANCES EXCEPT AS NOTED		CHKD	DATE				
			MFO	DATE				
			APPVL	DATE				
	MM .0 ± .00 ± .000 ±		± ± ±		NAME 15EDGKAM-3.81-XXP-1Y-100A (H)			
	MATERIAL :							
	ANGLES ± 1°							
			G.E :		DRAWING NO. 15EDGKAM-3.81-E100		SIZE A3	REV TO 09/10/10*
	THIRD ANGLE PROJECTION		FINISH :		/PART NO.			
			SCALE : 1:1		DO NOT SCALE DRAWING		SHEET 1 OF 1	